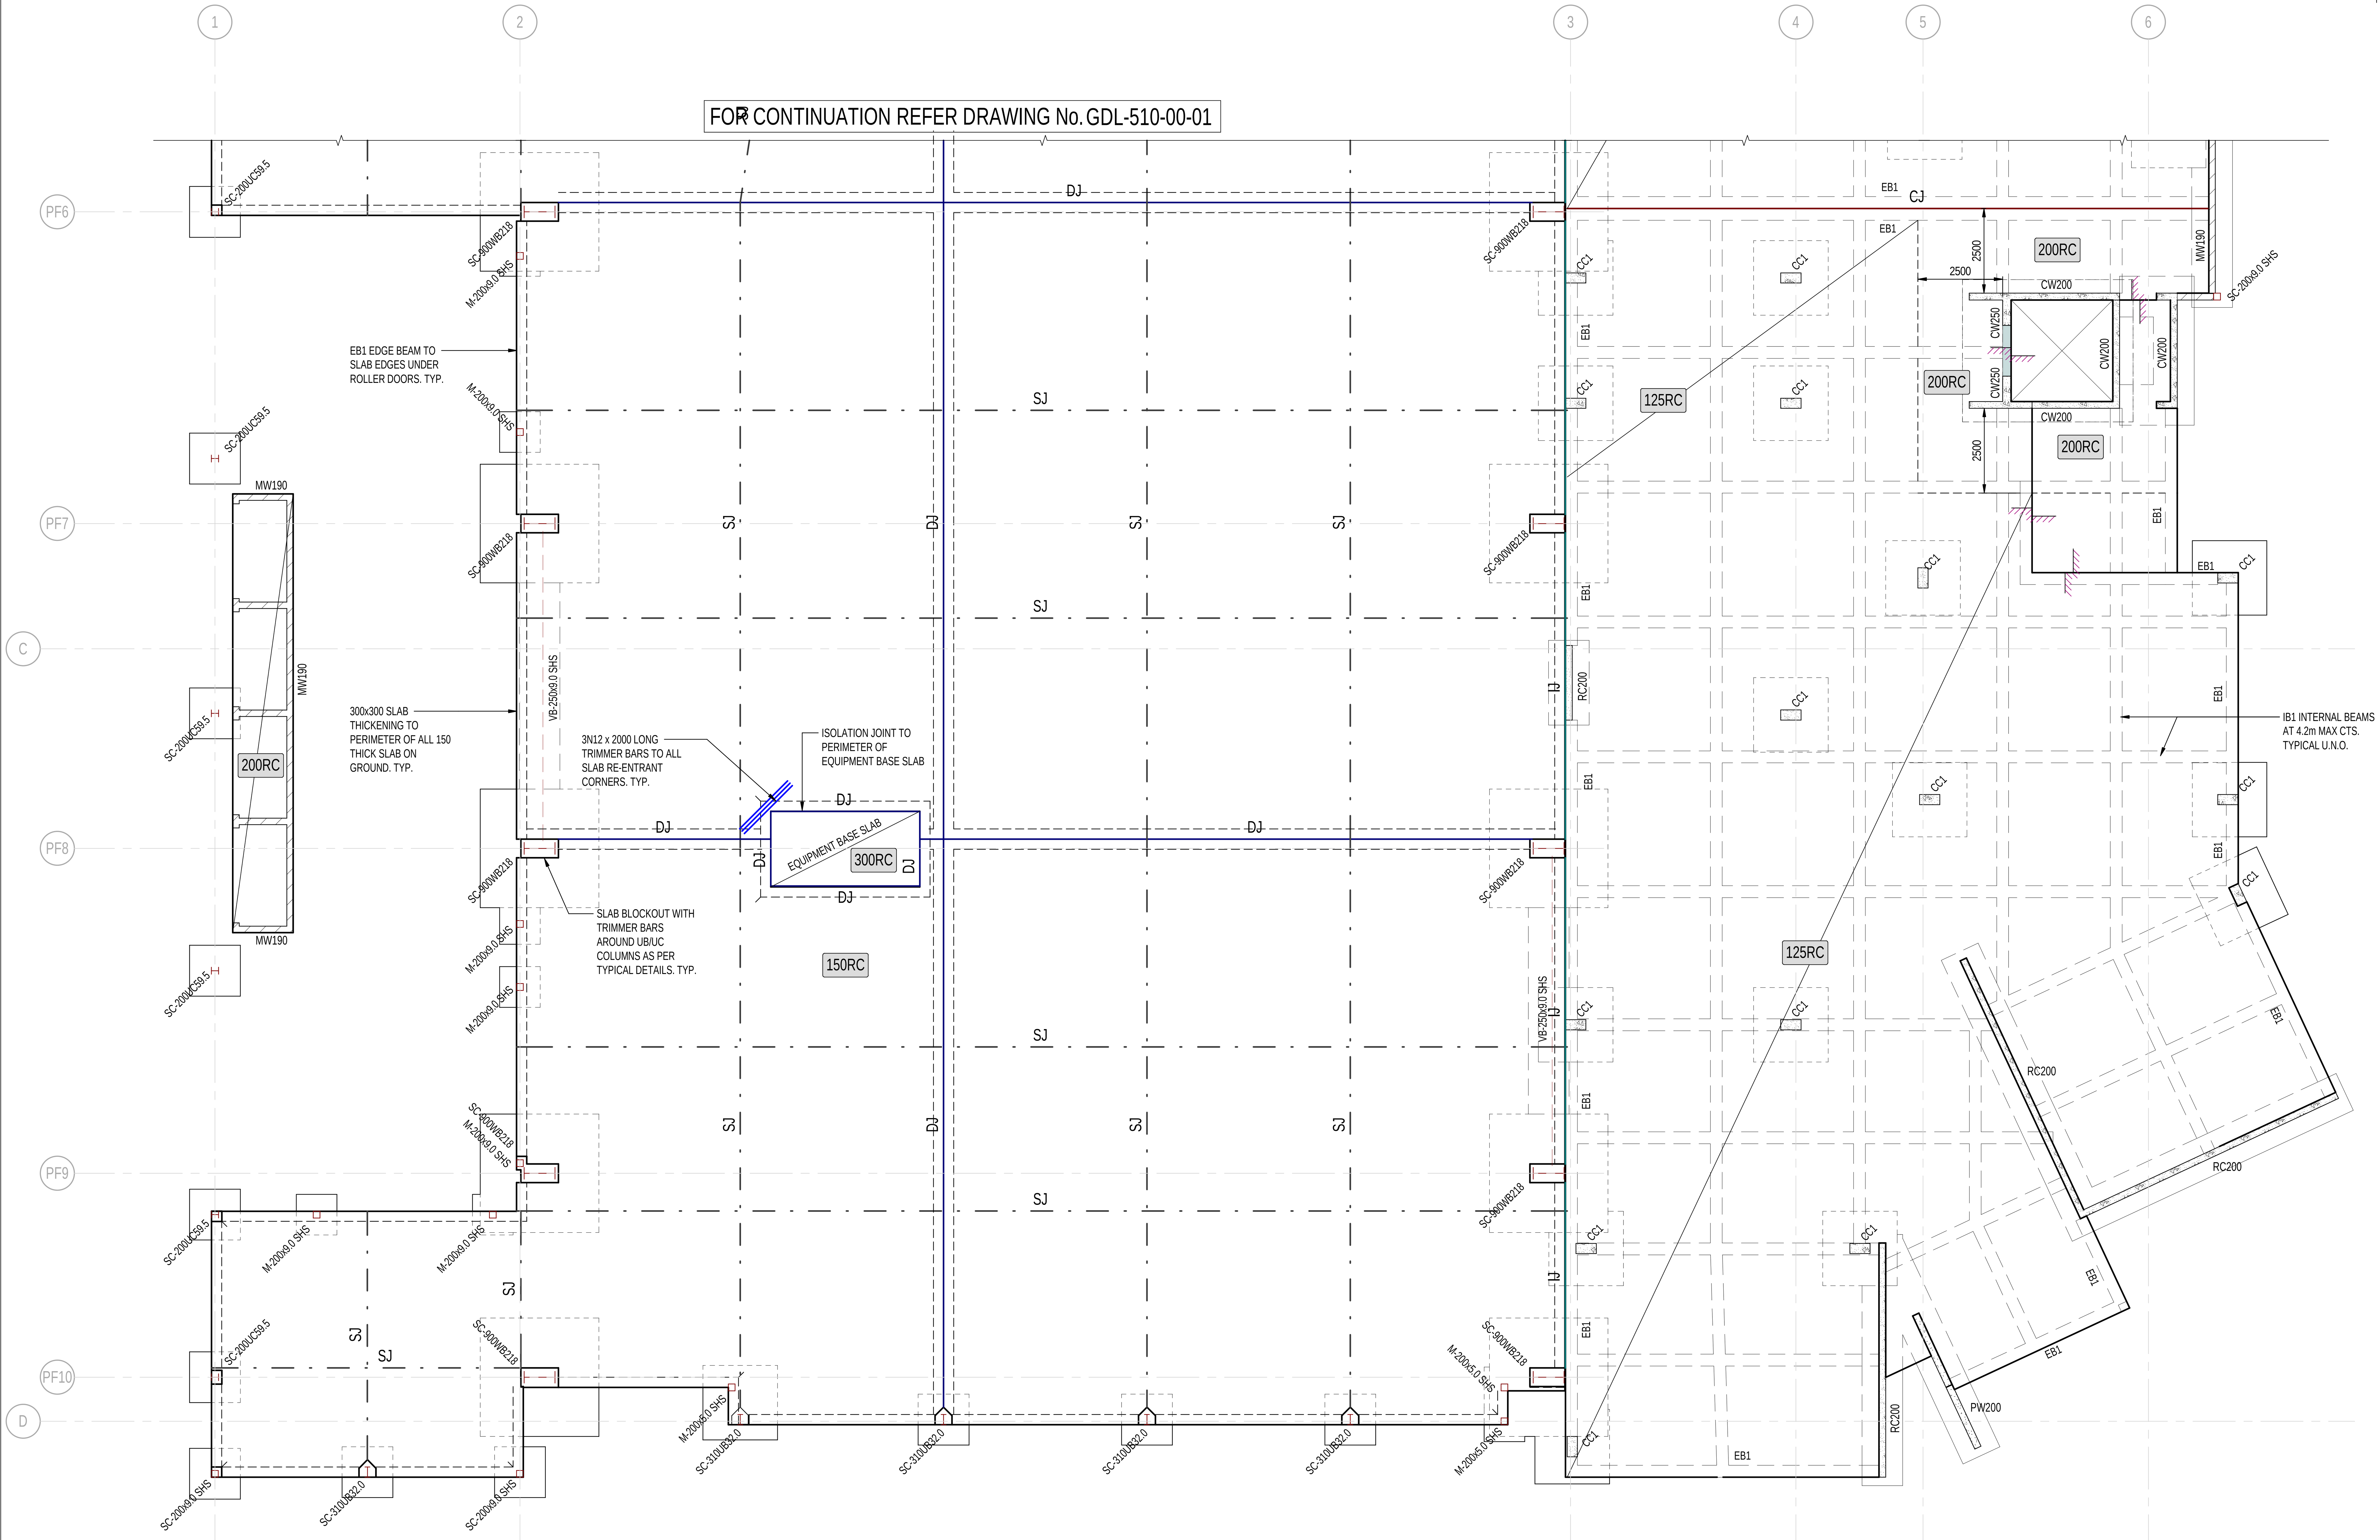

DO NOT SCALE

GROUND SLAB PLAN:

UNLESS NOTED OTHERWISE

SLAB ON GROUND:

WORKSHOP AREAS:
150mm THICK RC SLAB ON GROUND (U.N.O.)
SL92 FABRIC TOP

CLASS ROOMS:
125mm THICK RC SLAB ON GROUND (U.N.O.)
SL82 FABRIC TOP

ALL SLABS ON 0.2mm THICK POLYTHENE MEMBRANE ON 50mm COMPACTED SAND BED ON COMPACTED GRAVEL SUBGRADE.
REFER TO GEOTECHNICAL REPORT.
WHERE VOIDS OCCUR BELOW THE EXISTING BASEMENT SLAB, VOIDS SHALL BE FILLED WITH CEMENT STABILIZED SAND.

250RC — SLAB THICKNESS AND REINFT. TYPE
PT = POST TENSIONED,
RC = TRADITIONAL RC

CONCRETE GRADE:

ALL FLOOR ELEMENTS :
MIN CONCRETE GRADE : F'c = N40 MPa U.N.O.

CONCRETE REO RATES:

COLUMNS 180 kg/m³
GENERAL SLABS 120 kg/m³
RAFT SLABS 120 kg/m³

STRUCTURAL STEPS, FOLDS & HOBS:

APPROPRIATE ALLOWANCES TO BE MADE FOR HOBS AND FOLDS IN STRUCTURE TO ACCOMMODATE ARCHITECTURAL SETDOWNS.

LIGHTWEIGHT FACADE ELEMENTS:

ALL FACADE ELEMENTS TO BE LIGHTWEIGHT UNLESS NOTED OTHERWISE ON PLAN.
i.e.. NO ADDITIONAL NON LOAD BEARING PRECAST OTHER THAN SHOWN AND CALLED UP ON PLAN.

R.C. WALLS / SHEAR WALLS:

REFER ARCHITECTS FOR WATERPROOFING AND DRAINAGE OF WET AREAS.

STRUCTURAL LEGEND:

LOAD BEARING RC OVER
LOAD BEARING PRECAST OVER
LOAD BEARING MASONRY OVER
LOAD BEARING RC UNDER
CWxxx CORE WALL
RCxxx REINFORCED CONCRETE WALL
MWxxx MASONRY WALL
PWxxx PRECAST WALL

PENETRATIONS AND SETDOWNS

FORMED PENETRATION. EXACT LOCATIONS & SIZES OF PENETRATIONS TO BE CONFIRMED/COORDINATION WITH SERVICES ENGINEER

PENETRATION ZONE. EXACT LOCATIONS & SIZES OF PENETRATIONS TO BE CONFIRMED/COORDINATION WITH SERVICES ENGINEER

CJ CONSTRUCTION JOINT
DJ DOWELLED JOINT
IJ ISOLATION JOINT
KJ KEYED JOINT
SJ SAWN JOINT
STEP-V DENOTES STEP (V=VARIES)

CRANE LOADING:

GANTRY CRANE OF 3.2T SWL IS SUPPORTED BY CRANE BEAMS DENOTED CB
WHEEL LOADS ASSUMED:
VERTICAL 40kN
LATERAL 7.2kN
BUFFER 40kN

RAFT SLAB GROUND BEAM SCHEDULE

MARK	DIMENSIONS		REINFORCEMENT			COMMENTS
	WIDTH	MIN. DEPTH	REO BOTTOM	REO TOP	REO LIGS	
EB1	350	600				GROUND BEAM EDGE
IB1	350	600				GROUND INTERNAL BEAM

CONCRETE COLUMN SCHEDULE

MARK	DIMENSIONS		CONCRETE GRADE	REINFORCEMENT	
	MIN WIDTH	MIN LENGTH		VERTICAL	LIGATURES
CC1	300	600	N40		

INFORMATION REFLECTED ON THIS DRAWING REPRESENTS STRUCTURAL DESIGN DEVELOPED FOR D&C TENDER ADVICE ONLY, AND SHOULD NOT BE REGARDED AS COMPLETE. THE D&C CONTRACTOR SHOULD REFER TO ALL ASSOCIATED ARCHITECTURAL AND OTHER DISCIPLINE DRAWINGS, PROJECT BRIEFS AND CLIENT REQUIREMENTS AND MAKE ADEQUATE ALLOWANCES FOR ALL NECESSARY STRUCTURAL WORKS TO MEET THESE REQUIREMENTS, EQUIPMENT SCHEDULES AND COMPLIANCE WITH THE NCC & APPROPRIATE AUSTRALIAN STANDARDS

REV	DATE	BY	DESCRIPTION	CHK	APP
A	12.02.2026	MSB	ISSUED FOR D&C TENDER	BM	DG
P1	30.01.2026	PJH	DRAFT 60% DD ISSUE FOR REVIEW	BM	DG

DRAWING STATUS: DESIGN DEVELOPMENT

http://www.wsp.com

CLIENT: CQUniversity AUSTRALIA

ARCHITECT: THOMSON ADSETT + PEDDLE THORP

PROJECT: CQU ROCKHAMPTON TAFE CONSOLIDATION - STAGE 2

TITLE: BuildingName
LEVEL G - GENERAL ARRANGEMENT PLAN - SHEET 02

SCALE @ A1:	CHECKED:	APPROVED:
1:100	BM	DG
PROJECT NUMBER: PS229518	DRAWN: PJH	DATE: 14.01.2026

DRAWING No: 92-ST-DR-GDL-510-00-02 REV: A

DRAWING CREATED IN REVIT