

SCOPE OF WORK

Project: Annex Refurbishment and Build (Supply & Install)

RFT # 1221995761

Date: 17 April 2026

Document Status	
Project No: #1221995761	Document Owner: Peter Smith – Procurement Manager

REV	DATE		
A	15/03/2026	Issued for Quotation	P. Smith

Endorse	Signature	Date
Peter Smith – Procurement Manager	P. Smith	16.04.2026

Approve	Signature	Date
Brenton Jensen – Major Programs Superintendent	B. Jensen	16.04.2026

Table of Contents

Contents

1.0	Introduction.....	5
1.1	Purpose.....	5
1.2	Reference to Contract	5
1.2.1	Principal Acting Through the Superintendent.....	5
1.3	Principal Contractor Status.....	5
1.4	Project Overview	5
1.5	Location and Site Conditions	5
1.6	Key Interfaces	7
1.6.1	WHS Interface Clarification.....	7
1.6.2	Existing Stanwell Power Station operations.....	7
1.7	Principal's guides and procedures.....	8
1.8	Order of Precedence.....	8
1.9	Scope of Work Statement.....	8
2.0	Scope of Work Description.....	8
2.1.1	Scope Completeness.....	9
3.0	Works Included	9
3.1	Site Access, Security and Inductions.....	10
3.2	Mobilisation.....	10
3.2.1	Pre-Mobilisation Conditions	10
3.3	Temporary Building Works.....	10
3.4	Services, Utilities and Facilities.....	11
3.4.1	Existing Services	11
3.4.2	Foreseeable Conditions.....	11
3.5	Design.....	11
3.6	Procurement	12
3.6.1	Queensland Charter for Local Content (QCLC).....	12
3.6.2	Planning and Tracking.....	12
3.7	Off-site fabrication	13
3.7.1	Quality Assurance and Traceability.....	13
3.7.2	Transport and Logistics.....	13
3.7.3	Offloading and Handling	13
3.7.4	Storage and Laydown.....	13

3.7.5	Preservation and Protection	13
3.8	Demolition	14
3.8.1	Pre-Demolition Requirements	14
3.8.2	Protection of People, Property and Operations.....	14
3.8.3	Services Disconnection and Removal.....	14
3.8.4	Environmental and Safety Controls	15
3.8.5	Materials, Waste and Salvage	15
3.8.6	Completion of Demolition	15
3.9	Construction Works.....	15
3.9.1	Design, Coordination and Interfaces.....	15
3.9.2	Services and Integration	16
3.9.3	Completion and Making Good	16
3.10	External & Site Works.....	16
3.11	Testing, Commissioning & Handover	16
3.11.1	Testing and Verification	16
3.11.2	Commissioning Execution.....	17
3.11.3	Handover and Practical Completion.....	17
3.11.4	Training.....	17
3.11.5	Defects and Close-Out.....	17
3.12	Demobilisation	18
3.12.1	Removal of Temporary Works and Plant.....	18
3.12.2	Make-Good and Reinstatement	18
3.12.3	Cleaning and Waste Removal	18
3.12.4	Services and Temporary Connections	18
3.12.5	Handover and Access Clearance.....	18
3.12.6	Documentation and Close-Out.....	18
3.12.7	Safety and Compliance.....	18
3.13	Battery limits and tie-in points	18
3.13.1	Interfaces with Principal and others	19
3.13.2	Principal-supplied / free-issue items (if any).....	19
3.13.3	Access and constraints by others	19
4.0	Works Excluded	19
4.1	General Exclusions – All Buildings.....	19
4.2	New Office Building – Works Excluded.....	19
4.3	Registry Building – Works Excluded	20
4.4	Workshop Building – Works Excluded	20

4.5	Warehouse Building – Works Excluded	20
5.0	Design Responsibility	21
6.0	Authority Approvals & Fees	21
7.0	Project Management	21
7.1	General	21
7.2	Management Plans	22
7.2.1	Project Execution Plan	22
7.2.2	Construction Management Plan	22
7.3	Project Information Management	23
7.3.1	Document Submission	24
7.3.2	Commissioning Planning	24
7.4	As Built Requirements	25
7.4.1	As-Built Drawings	25
7.4.2	Calculations	26
7.4.3	Manuals	26
8.0	Reporting and Programming Requirements	26
8.1	Contract Program	26
8.2	Commodity Curves	27
8.3	90-Day Lookahead schedule	28
8.4	Monthly Status Report	28
8.5	Weekly & Daily Reports / Meetings	28
8.5.1	Contractor's Weekly Dashboard	28
8.5.2	Daily reports	29
8.5.3	Weekly Progress Meeting	29
8.5.4	Three-Week Lookahead Schedule	30
9.0	Health, Safety and Environment	30
10.0	Quality Management System	30
10.1	Quality Plan	31
10.2	Inspection and Test Plans	32
10.3	Requests for Information (RFI)	34
10.4	Non-Conformances	34
10.5	Quality Audits	34
10.6	Manufacturers Data Report	34
11.0	General Site Requirements	35
11.1	Access to site:	35
11.2	Site evacuation / muster:	35

11.3	Fitness for Work.....	35
11.4	Standard Work Hours	35
12.0	Abbreviations and Definitions	35
13.0	Appendices	37
14.0	Appendix A - Reference Drawings and Documents	38
15.0	Appendix B – Supplier Deliverable Requirement List (SDRL)	42
16.0	Appendix C - Works included and excluded matrix	54
16.1	New Office Building – Inclusions vs Exclusions.....	54
16.2	Registry Building – Inclusions vs Exclusions	54
16.3	Workshop Building – Inclusions vs Exclusions.....	55
16.4	Warehouse Building – Inclusions vs Exclusions	55
17.0	Appendix D – HSE-PROC-18-Principal Contractor.....	56

1.0 Introduction

1.1 Purpose

The purpose of this document is to describe the Scope of Works for the SPS Annex Building Refurbishment Project at Stanwell Power Station (SPS).

This document defines the scope boundaries, inclusions, exclusions, and responsibilities and is to be read in conjunction with the detailed Architectural Specification and the Contract.

1.2 Reference to Contract

Capitalised terms used in this Scope of Work have the same meaning as defined in the Contract, unless expressly stated otherwise.

1.2.1 Principal Acting Through the Superintendent

Except where expressly stated otherwise in the Contract, all rights, approvals, acceptances, directions, instructions and consents of the Principal under this Scope of Work are exercised by the Principal acting through the Superintendent.

No action or inaction by the Superintendent shall be construed as relieving the Contractor of any obligation, responsibility or risk under the Contract.

1.3 Principal Contractor Status

Without limiting clause 12 (Protection of people and property) of the Contract, the Contractor is appointed as the Principal Contractor under this Contract for the purposes of the Work Health and Safety Act 2011 (Qld) and associated Regulations and bears all statutory duties, obligations and responsibilities of a Principal Contractor in relation to the Work Under the Contract.

1.4 Project Overview

The Stanwell Power Station Annex Refurbishment and New Build project involves renovating three existing office spaces and the development of a new workplace facility for staff at SPS.

The project includes the construction of a new single-storey workplace building with an approximate Gross Floor Area (GFA) of 818 m², together with approximately 134 m² of surrounding verandah.

In addition, the works comprise refurbishment of three (3) existing areas, including:

1. Registry refurbishment – approximately 415 m²
2. Workshop refurbishment – approximately 715 m²
3. Main workshop refurbishment – approximately 340 m²

The refurbishment works generally involve the stripping out of existing finishes and fittings, followed by comprehensive fitout and upgrade works.

1.5 Location and Site Conditions

SPS is located 22km west of Rockhampton in central Queensland, with a capacity to generate 1,460 megawatts. Commissioned in 1993 – 1996 Stanwell Power Station is the most technologically advanced and automated coal fired power station in Australia.

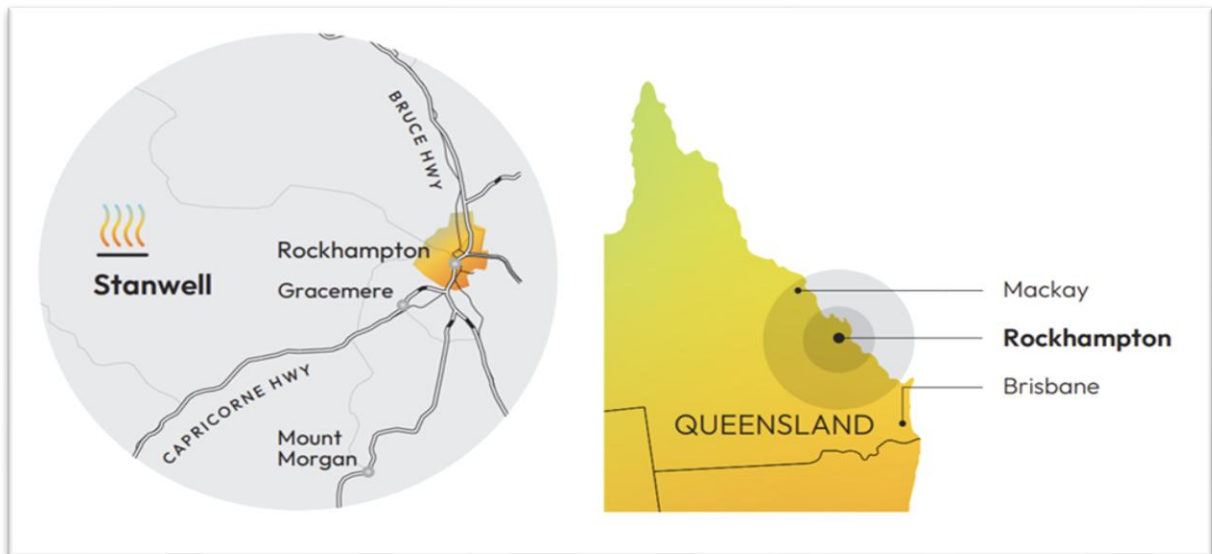


Figure 1: Site Location

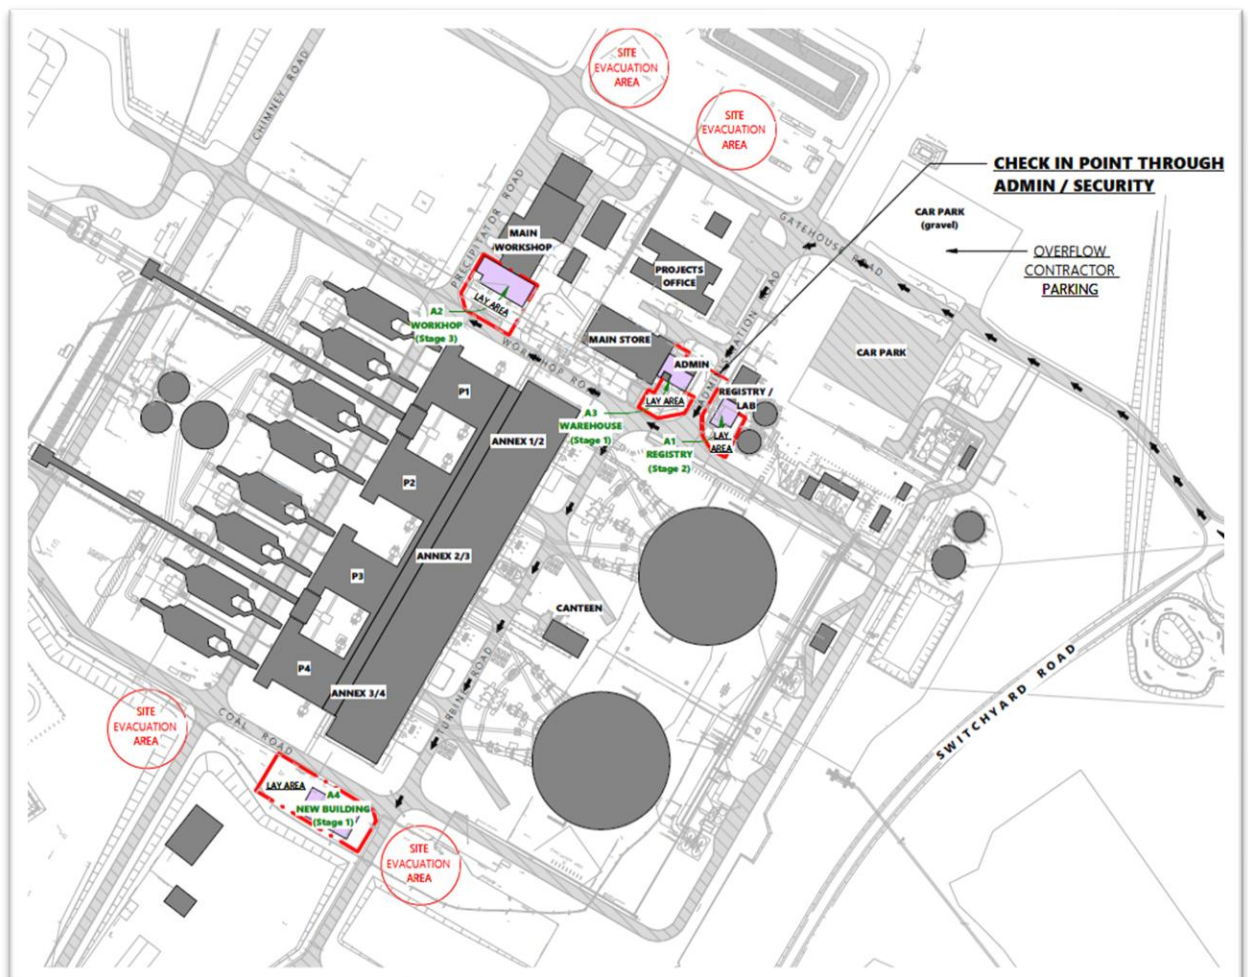


Figure 2: Site of Work location (detailed battery limits illustrated in OVERALL SITE PLAN: 25_003 AO-000)

Site conditions: Site conditions are based upon historical climate data (1939–2022) at the Rockhampton Aero weather station (039083).

Climate statistic	Unit	Value
Minimum temperature (039083)	°C	-1.0
Maximum temperature (039083)	°C	45.3
Mean relative humidity (039083)	%	40 – 73
Site elevation (Site of Work)	M (ASL)	60
Wind speed region (according to AS/NZS 1170.2:2021)	-	Region C
Corrosion region (to AS 4312-2019)		C3 – Very High (Industrial)
Importance level		2
Terrain category		2

1.6 Key Interfaces

The Contractor is responsible for managing all interfaces necessary to deliver the Work Under Contract (WUC), including interfaces with the Principal, Superintendent, separate contractors, consultants, authorities, existing operations, existing services, internal trades, end users, and the supply chain.

1.6.1 WHS Interface Clarification

Nothing in this Scope of Work shall be construed as transferring any duty of a Principal Contractor to the Principal or the Superintendent.

The Principal and Superintendent retain their respective roles under the Contract only and do not assume control of the Works or WHS management.

1.6.2 Existing Stanwell Power Station operations

The Contractor is required to interface with site during the works to minimise impact to operations and maintenance activities.

The following activities are anticipated to be occurring within close proximity of the construction during all works related to this contract:

1. General Operations;
2. Unit 3 outage between 30 May and 24 July 2026;
3. Unit 4 outage between 03 July and 27 July 2027; and
4. General Site Access.

The Contractor must provision for a significant increase to personnel and traffic interactions during the outage periods.

The Contractor must undertake a risk assessment prior to construction to confirm any critical times where operations / maintenance may not be completed.

1.7 Principal's guides and procedures

The Contractor is responsible for ensuring it is familiar with, and complies with, all Principal manuals, guides, policies, procedures and forms applicable to the WUC, as made available from time to time, including those published at [Stanwell Doing Business with Us](#).

Without limitation, the Contractor must fully comply with HSE-PROC-18 – Principal Contractor HSE Requirements ([Appendix D – HSE-PROC-18 – Principal Contract](#)), as amended from time to time, which sets out the Principal's minimum Health, Safety and Environment (HSE) requirements.

Compliance with HSE-PROC-18 is a mandatory contractual obligation and does not limit or reduce the Contractor's statutory duties as Principal Contractor under applicable legislation or its obligations under the Contract, and the Contractor must ensure all subcontractors, suppliers and personnel engaged in the Works comply with these requirements as applicable to their activities.

1.8 Order of Precedence

In the event of ambiguity or contradiction between references in this Scope of Work, the ambiguity or contradiction shall be resolved by giving precedence to the documentation in the order listed below:

1. Statutory and Legislative Requirements;
2. The Contract;
3. This description of the Work under Contract contained in this Scope of Work document;
4. Project specific design drawings;
5. Project specific design documentation;
6. Stanwell's Standards and Procedures; and
7. Australian Standards.

The Project specific drawings, documents ([Appendix A – Reference Drawings and Documents](#)) and specifications must be read in their entirety to describe the Work under Contract.

The Contractor must raise any conflicts between the referenced documents and submit the most onerous requirement for approval before proceeding.

1.9 Scope of Work Statement

The Contractor is appointed as the Principal Contractor for the duration of the Work Under the Contract (WUC) and must be solely responsible for discharging all duties and obligations of a Principal Contractor under applicable WHS legislation, including the planning, management, coordination and control of the Works.

The Scope of Work includes all management, labour, supervision, training, authorisations, construction plant and equipment, tooling, temporary works, tie-ins, facilities, materials and equipment, mobilisation and demobilisation, accommodation, transport, lubricants and consumables required for the safe delivery of scope requirements.

2.0 Scope of Work Description

The Contractor, in its capacity as Principal Contractor, is responsible for the complete planning, management, coordination and control of the Works required to deliver the Stanwell Power Station Annex Refurbishment and new build facilities in accordance with the Contract Documents.

The scope includes:

1. Construction of a new single-storey office building, including architectural, structural, fit-out and all building services;
2. Refurbishment of existing buildings, including demolition, reconfiguration, upgrade of finishes and services, and coordination within operational areas;
3. All demolition works necessary to enable the Project, including service isolations, protection of adjacent assets and lawful disposal;
4. External, civil and site works comprising earthworks, drainage, pavements, access structures, landscaping, plant areas and reinstatement;
5. Off-site fabrication, transport, logistics, storage and preservation of prefabricated elements;
6. Design development and certification where design responsibility rests with the Contractor;
7. All temporary works and site establishment; and
8. Testing, commissioning, training, documentation, defect rectification and handover to achieve Practical Completion.

2.1.1 Scope Completeness

The WUC includes all work, materials, services and activities necessary to deliver a complete, functional and compliant facility fit for its intended purpose, whether or not each item is expressly identified in the Contract (including this Scope of Work and the Architectural Specification).

3.0 Works Included

The Contractor, in its capacity as Principal Contractor, must be responsible for the complete planning, management, coordination, supply, construction, testing, commissioning and handover of all Works across the following facilities (collectively, the Project Buildings):

1. A1 - Registry Building (Refurbishment)

Refurbishment and reconfiguration of the existing Registry Building, including demolition, building fabric upgrades, services modifications and internal fit-out works.

2. A2 - Workshop Building (Refurbishment)

Refurbishment of the Workshop Building, including amenities upgrades, internal reconfiguration, services modifications and building fabric works.

3. A3 - Warehouse Building (Refurbishment)

Refurbishment of the Warehouse Building, including office areas, amenities, storage areas, services upgrades and external envelope works.

4. A4 - New Building (New Build)

Delivery of a new, single-storey office building, including all structure, envelope, services, internal fit-out and external works necessary to achieve a complete, operational facility.

The Contractor must deliver all Project Buildings as fully functional, compliant, integrated and operational facilities in accordance with the Contract Documents. The Works include all labour, materials, plant, supervision, temporary works, interfaces, coordination and activities necessary to achieve this outcome, except where expressly excluded under the Contract ([Appendix C – Works Included and Excluded Matrix](#)).

The Contractor's scope includes, but is not limited to, the following:

3.1 Site Access, Security and Inductions

The Contractor will:

1. Comply with all Stanwell Power Station site rules, security requirements, and induction processes should access be required;
2. Ensure that all Contractor personnel complete the required inductions to enter the Site;
3. Provide all temporary works including fencing, hoardings, protection, traffic management, and access control;
4. Coordinate deliveries within the permitted delivery time windows;
5. Be responsible for unloading, storage, preservation, care custody and control of all items delivered to Site; and
6. without limiting clause 14 (Care of WUC and reinstatement of damage) of the Contract, protect occupied premises during the period of WUC.

3.2 Mobilisation

The Contractor must not mobilise to Site until all pre-mobilisation requirements including its completion of Mobilisation Checklist (ref: T-3913) have been satisfied to the Principal's and Superintendent's acceptance.

3.2.1 Pre-Mobilisation Conditions

Prior to mobilisation, the Contractor must prepare, submit and obtain acceptance (where required) of all documents and information necessary to demonstrate readiness to mobilise, including but not limited to:

1. Construction Program identifying mobilisation activities, site establishment, sequencing and interfaces with concurrent or Principal-engaged works;
2. Project Quality Management Plan, including Inspection and Test Plans applicable to early works;
3. Environmental Management Plan and associated control measures (including erosion, sediment, dust, waste and noise controls);
4. Work Health and Safety Management Plan and Safe Work Method Statements for mobilisation and early site activities;
5. Site establishment layouts showing construction areas, laydown areas, access routes, fencing, signage, traffic management and temporary facilities; and
6. Details of the Contractor's nominated site representatives, including after-hours emergency contacts.

Mobilisation will not be deemed approved until all mandatory submissions have been made in accordance with the Contract Documents.

3.3 Temporary Building Works

The Contractor must establish the Site in a safe, orderly and compliant manner, including:

1. Installation and maintenance of temporary fencing, hoardings, barriers, signage and traffic management;
2. Establishment of approved construction areas, laydown areas and site offices strictly within the defined Site battery limits;
3. Provision, operation and maintenance of all Temporary Works necessary for execution of the Works; and
4. Protection of existing services, structures, assets and vegetation to remain.

No permanent Works may commence until site establishment has been completed and accepted by the Principal (acting through the Superintendent).

3.4 Services, Utilities and Facilities

The Contractor must provide and maintain all temporary services required for the Works, including power, water, telecommunications and internet.

No permanent ablution, welfare or communications facilities will be provided by the Principal, the Contractor must provide all required amenities during WUC.

Existing services may only be used where expressly permitted and must be protected from damage at all times.

3.4.1 Existing Services

The Contractor is responsible for identifying, protecting and managing all existing services affected by the Works.

Service locations are to be confirmed during planning, with underground and above-ground services positively identified and marked prior to any works.

All required isolations will be implemented by the Principal in accordance with Business Procedure OHS-PROC-149 – Isolation of Plant Handover and formally handed over to the Contractor through the Plant Handover process, with the Principal retaining control of isolations at all times.

The Contractor must maintain essential services unless otherwise approved, protect all services and assets to remain, comply with excavation and utility authority requirements, and rectify any damage at no cost to the Principal.

Where services are concealed, details must be submitted for approval and clearly recorded for future identification.

3.4.2 Foreseeable Conditions

Subject to clause 25 (Latent conditions) of the Contract, the Contractor acknowledges that the Works involve construction within an operational industrial environment and accepts the risk of all conditions that a competent and experienced contractor could reasonably foresee having regard to the Site, the Contract and the nature of the Works.

3.5 Design

Where the Contractor is responsible for any part of the design under the Contract, the Contractor must carry out and complete all design activities necessary for the proper execution and completion of the Works in accordance with the Contract.

The Contractor is fully responsible for the adequacy, accuracy, completeness and fitness for purpose of all design documents prepared by or on behalf of the Contractor, including compliance with the Scope of Work, Specifications, Drawings, applicable Australian Standards and all legislative and statutory requirements.

Without limiting clause 7A.2 (Contractor's Design) of the Contract, the Contractor must ensure that all design is coordinated with the Works, suitable for construction, and capable of achieving the required performance outcomes.

Without limiting clause 7A.3 (Superintendent may review Contractor's Design Documents) of the Contract, any review, comment, approval or non-rejection of design documents by the Principal, the

Superintendent or their representatives does not relieve the Contractor of its design obligations, nor does it transfer design responsibility or risk.

The Contractor remains solely liable for all errors, omissions, non-compliances and consequences arising from the design, whether carried out directly or by subcontractors or consultants engaged by the Contractor.

3.6 Procurement

3.6.1 Queensland Charter for Local Content (QCLC)

The Works under this Contract are subject to the QCLC under the Queensland Industry Participation Policy Act 2011.

The QCLC registration number for the Works is **WR26/7897**.

Without limiting clause 49.3 (Queensland Charter for Local Content) of the Contract, the Contractor must, in planning and executing the supply, fabrication, delivery and installation of the Works, provide full, fair and reasonable opportunities for capable Queensland and regional suppliers, manufacturers and service providers to participate in the Works, where they are competitive and meet the technical, commercial and delivery requirements of the Contract.

The Contractor must comply with the requirements of the QCLC, including the preparation, submission and implementation of any required Statement of Intent and Project Outcome Report, in accordance with the Charter and the Contract.

[Queensland Charter for Local Content Website](#)

3.6.2 Planning and Tracking

The Contractor is to develop and maintain a procurement register to be used as the single source of truth for planning, tracking, and assuring all construction related procurement packages across the project lifecycle, from early works through close-out.

The procurement register must capture all procurement related to WUC, be developed in Microsoft Excel or similar and be made available to the Superintendent and Principal in native format.

Mandatory data fields are to include at a minimum:

1. Unique Procurement ID;
2. Package name and description;
3. Workstream description (e.g. Early Works / Main Works / Fit-out);
4. Required on site date;
5. Milestones applicable to the package (tender open, tender close, award, delivery, start dates etc.);
6. Vendor / suppliers; and
7. Specify any local, first nations and/or small to medium suppliers.

The register shall support:

1. Executive procurement dashboards;
2. Forward commitment and cash-flow forecasting;
3. Long-lead risk reporting; and
4. Audit and probity reviews.

3.7 Off-site fabrication

The Contractor must plan, coordinate and execute all off-site fabrication of components forming part of the Works, including any shop detailing, prefabrication, modularisation or pre-assembly, whether or not specifically identified in the Contract.

Off-site fabrication must comply with the Contract, approved shop drawings, specifications, relevant Australian Standards, and manufacturer's requirements.

The Contractor is responsible for quality, dimensional accuracy, finish, completeness, and fitness for purpose of all prefabricated items, notwithstanding any review or acceptance of shop drawings or inspections by the Superintendent or Principal.

3.7.1 Quality Assurance and Traceability

The Contractor must implement quality controls for off-site fabrication equivalent to those required for on-site WUC, including inspection and test plans, hold points where applicable, and full traceability of materials and components.

Records must be maintained for fabrication, inspection, testing, and corrective actions and made available to the Superintendent upon request.

3.7.2 Transport and Logistics

The Contractor must arrange and manage all transport and logistics associated with the delivery of prefabricated components from the place of manufacture to the Site.

Transport must:

1. Protect components from damage, deformation, contamination and weather exposure;
2. Comply with all legislative requirements, including Heavy Vehicle National Law and site access restrictions;
3. Be coordinated with the Principal (acting through the Superintendent), including delivery sequencing, delivery times, and access approvals; and
4. Allow for Site constraints, including shared roads, secure areas, delivery windows, and operational interfaces with Stanwell Power Station.

3.7.3 Offloading and Handling

The Contractor must provide all labour, supervision, lifting equipment, plant and temporary works necessary to safely offload prefabricated items at the Site.

3.7.4 Storage and Laydown

The Contractor is responsible for the storage of all prefabricated components, whether stored off-site or on-site.

3.7.5 Preservation and Protection

The Contractor must preserve and protect all prefabricated components in accordance with manufacturer's recommendations and good industry practice from fabrication through to incorporation into the Works.

3.8 Demolition

The Contractor must carry out all demolition works required to facilitate the Works as documented in the Contract, including but not limited to:

1. Demolition and removal of existing demountable office buildings and associated structures within the defined Contract;
2. Removal of redundant services, fixtures, fittings, pavements and ancillary elements affected by the Works; and
3. Making safe, capping, isolating or diverting existing services as required for demolition and subsequent construction.

Demolition must not commence until the Superintendent is satisfied that all pre-demolition requirements have been met.

Demolition must be limited to the areas and extents documented. No additional demolition must be undertaken without the prior written direction of the Superintendent.

3.8.1 Pre-Demolition Requirements

Prior to commencing demolition, the Contractor must:

1. Verify the location, condition and status of all existing services, including underground services, noting that drawings of existing services are indicative only and no warranty is given as to their accuracy;
2. Submit demolition methodologies, sequencing and Safe Work Method Statements addressing safety, environmental controls and protection of adjacent assets; and
3. Coordinate demolition activities with Site operations, access constraints and any concurrent or Principal-engaged works.

Demolition shall not commence until the Superintendent is satisfied that all pre-demolition requirements have been met.

3.8.2 Protection of People, Property and Operations

The Contractor must protect all persons, occupied premises, adjacent facilities, structures, services and assets to remain.

Safe access must be maintained at all times for Site occupants and operations.

Demolition activities must be planned and executed to minimise nuisance, including noise, dust, vibration and disruption to ongoing operations.

Any damage caused by demolition activities must be promptly made good at the Contractor's cost.

3.8.3 Services Disconnection and Removal

Existing services affected by demolition must be isolated, disconnected, removed or diverted in a controlled manner.

Redundant services must be removed or made safe as part of the demolition works.

Interruptions to existing services must be minimised and coordinated in advance with the Superintendent.

3.8.4 Environmental and Safety Controls

Demolition works must comply with the approved Environmental Management Plan and all statutory requirements.

Measures must be implemented to control dust, noise, waste, runoff and pollution.

All demolition waste must be removed from Site and disposed of lawfully.

3.8.5 Materials, Waste and Salvage

Unless expressly stated otherwise in the Contract, demolished materials become the property of the Contractor and must be removed from Site.

Hazardous materials, if encountered, must be managed strictly in accordance with statutory requirements and the Contract.

3.8.6 Completion of Demolition

Following demolition, the Site must be left clean, safe and suitable for subsequent Works.

All temporary supports, protections and debris associated with demolition must be removed.

Demolition works must be deemed complete only when accepted by the Superintendent.

3.9 Construction Works

The Contractor must carry out all construction works necessary to deliver the Works in accordance with the Contract, including the Architectural Specification, drawings, schedules and referenced standards.

The construction works include, without limitation:

1. Construction of the new single-storey office facility and associated internal and external building works;
2. Structural, architectural and building fabric works, including framing, linings, finishes, doors, windows, glazing, roofing and cladding;
3. Coordination and integration of all building services works (mechanical, electrical, hydraulic, fire and communications) as documented; and
4. External works within the Site battery limits, including pavements, access ramps, stairs, landscaping and associated civil works.

All construction activities must be carried out to achieve a complete, functional and compliant facility.

3.9.1 Design, Coordination and Interfaces

The Contractor must coordinate all construction activities across trades and disciplines and manage interfaces between architectural, structural and services works.

Layouts shown on drawings are diagrammatic unless figured, the Contractor must verify dimensions, levels and conditions prior to construction.

The Contractor must coordinate construction with existing Site operations, occupied premises and any concurrent or Principal-engaged works.

3.9.2 Services and Integration

Building services must be installed, tested and commissioned in coordination with the construction works and to the satisfaction of the Superintendent.

Penetrations, fixings and supports required for services must be fully coordinated with architectural and structural elements.

No services must be concealed until required inspections and approvals have been obtained.

3.9.3 Completion and Making Good

Works will be deemed complete only when they are fit for their intended purpose, fully compliant with the Contract, and accepted by the Principal acting through the Superintendent.

The Contractor must make good all damage caused by construction activities and leave the Site clean, safe and fit for use.

3.10 External & Site Works

The Contractor must carry out all external works necessary to complete the Works in accordance with the Contract, including the Architectural Specification, drawings and referenced standards.

External works include, without limitation:

1. Site preparation, earthworks and regrading within the defined Site battery limits;
2. Stormwater drainage works and integration with existing drainage systems;
3. External pavements, footpaths, ramps, stairs and access ways;
4. Landscaping works, including planting, turf, garden beds and hardscape elements;
5. External fencing, gates and barriers;
6. External service trenches, pits, ducting and reinstatement associated with building services; and
7. External plant areas, plinths and enclosures.

External works must be executed to achieve documented levels, falls, tolerances and performance requirements, while maintaining safe access and minimising disruption to Site operations.

On completion, all disturbed areas must be reinstated, temporary works removed, and the Site left clean, safe and fit for use.

External works are deemed complete only when accepted by the Superintendent.

3.11 Testing, Commissioning & Handover

Commissioning must demonstrate not only compliance with technical requirements but that the Works are operationally ready for occupation, use and maintenance by the Principal.

Practical Completion will not be achieved unless the Works are capable of being operated safely and effectively in accordance with their intended purpose.

3.11.1 Testing and Verification

The Contractor must:

1. Carry out all inspections, tests and verifications required by the Contract, Specifications, Drawings, Australian Standards and statutory authorities;
2. Ensure testing is performed by suitably qualified and competent personnel;
3. Coordinate witness and hold points with the Superintendent in accordance with approved Inspection and Test Plans (ITPs); and
4. Rectify all defects, non-conformances or deficiencies identified during testing prior to re-testing.

No system or element of the Works must be placed into service or concealed until all required inspections and tests have been completed and accepted.

3.11.2 Commissioning Execution

Commissioning must be undertaken in a structured and staged manner to demonstrate:

1. correct installation and operation of individual systems;
2. integrated performance of interfacing systems;
3. compliance with performance, safety, environmental and statutory requirements; and
4. readiness for occupation, operation and maintenance.

Commissioning records, test results and certifications must be progressively compiled and submitted as part of the Manufacturer's Data Reports (MDRs).

3.11.3 Handover and Practical Completion

Prior to requesting Practical Completion, the Contractor must:

1. complete all required testing and commissioning activities;
2. ensure all systems are operational, safe and compliant;
3. provide all documentation necessary for the use, operation and maintenance of the Works, including as-built drawings, test certificates, warranties and O&M manuals in accordance with the SDRL;
4. complete a joint inspection and walkthrough with the Principal (acting through the Superintendent); and
5. to identify any outstanding defects or punch list items.

Practical Completion will not be achieved until all requirements of testing, commissioning and handover have been satisfied to the Superintendent's acceptance.

3.11.4 Training

The Contractor must provide training for the Principal's nominated personnel in the operation, control, routine maintenance and emergency procedures for all relevant systems and equipment. Training must be coordinated with commissioning activities and supported by appropriate training materials and manuals.

3.11.5 Defects and Close-Out

Any defects or omissions identified during commissioning, handover or the Defects Liability Period must be rectified promptly in accordance with the Contract.

Defects and punch list management is to be proposed by the Contractor and agreed to by the Principal.

Final close-out documentation must reflect the completed Works and incorporate all approved changes arising from commissioning and defect rectification.

The Contractor's obligations in relation to fitness for purpose, design responsibility and performance of the Works survive Practical Completion and the issue of any certificate under the Contract.

3.12 Demobilisation

The Contractor must, upon achieving Practical Completion (or earlier if directed), fully demobilise from the Site in an orderly, safe, and timely manner.

Demobilisation must include, as a minimum, the following:

3.12.1 Removal of Temporary Works and Plant

Remove all Temporary Works, construction plant, equipment, scaffolding, hoardings, site offices, amenities, temporary services, signage, and surplus materials from the Site, unless otherwise directed by the Principal (acting through the Superintendent).

3.12.2 Make-Good and Reinstatement

Reinstate all affected areas to their original or specified condition, including surfaces, finishes, landscaping, pavements, roads, and existing services impacted by the Works. Repair any damage attributable to the Contractor's activities at no additional cost.

3.12.3 Cleaning and Waste Removal

Complete final cleaning of all work areas and adjoining affected areas. Remove all waste, debris, excess materials, and hazardous substances from the Site and dispose of them lawfully off-site.

3.12.4 Services and Temporary Connections

Isolate, disconnect, and remove all temporary service connections (power, water, data, drainage, etc.). Confirm permanent services are operational, compliant, and left in a safe condition.

3.12.5 Handover and Access Clearance

Return all keys, passes, permits, security credentials, and access devices issued to the Contractor. Clear all laydown and storage areas and surrender possession of the Site in accordance with the Contract.

3.12.6 Documentation and Close-Out

Prior to final demobilisation, submit all required close-out documentation, including as-built records, warranties, test results, certifications, and operation and maintenance information, as required under the Contract.

3.12.7 Safety and Compliance

Demobilisation activities must comply with all WHS, environmental, and site-specific requirements. The Site must be left in a safe, secure, and hazard-free condition.

3.13 Battery limits and tie-in points

The Works are limited to the Site/battery limits shown on the Contract Drawings. Where tie-ins are required beyond the battery limits, the Contractor's Works shall extend to the interface point(s) shown on the Contract Drawings or as directed by the Superintendent.

3.13.1 Interfaces with Principal and others

Where the Principal engages separate contractors (including for audio-visual systems and other specialist packages), the Contractor shall coordinate access, set-out, builders works/rough-ins, protection, program interfaces, and testing/commissioning interfaces to ensure a complete and integrated facility.

The Contractor remains responsible for overall coordination of the Works and for managing interfaces between all trades and parties within the battery limits.

3.13.2 Principal-supplied / free-issue items (if any)

Any Principal-supplied or free-issue materials/equipment shall be expressly identified in the Contract Documents. Unless expressly identified as Principal-supplied, all materials, equipment and labour necessary to deliver the Works are Contractor-supplied.

3.13.3 Access and constraints by others

The Contractor shall identify and manage any constraints created by Site operations, outage windows, restricted areas, and concurrent works, and incorporate these into its planning, methodology and Contract Program.

4.0 Works Excluded

These exclusions do not relieve the Contractor of any obligations during the Defects Liability Period, including statutory servicing, testing, tuning or maintenance expressly required by the Contract Documents.

4.1 General Exclusions – All Buildings

Unless expressly included under the Contract, the following are excluded from the Works:

1. Ongoing operation, maintenance or facilities management of completed buildings after Practical Completion;
2. Remediation of latent defects or hazardous materials not expressly identified in the Contract Documents, the discovery and treatment of latent conditions or hazardous materials shall be managed strictly in accordance with the Contract and the procedures set out in the Specification;
3. Upgrades to existing services or infrastructure beyond those directly impacted by the Works;
4. Changes arising from future regulatory, code or standard amendments after the Date of Contract; and
5. Works outside the defined battery limits shown on the Contract Drawings.
6. Audio-visual systems are delivered under a separate contract by the Principal. The Contractor shall coordinate access, rough-in, interfaces and fit-off with the Principal's AV contractor in accordance with the Specification.

4.2 New Office Building – Works Excluded

The following are excluded from the New Office Building Works unless expressly stated otherwise:

1. Tenant-specific loose furniture, personal effects and relocations;
2. ICT systems beyond containment, power and data cabling (including servers, active network equipment and software);
3. Security systems beyond base building provisions (including monitoring, access control programming and security staffing);
4. Landscaping works beyond those expressly shown on the drawings;
5. Future expansion works, additional fit-out stages or change-of-use upgrades; and
6. Any works to existing adjacent buildings except where expressly identified as interfaces.

4.3 Registry Building – Works Excluded

The following are excluded from the Registry Building Works unless expressly stated otherwise:

1. Relocation, cataloguing or management of operational records, archives or sensitive materials;
2. Temporary or permanent decanting of staff beyond the construction staging expressly described;
3. Upgrades to retained building elements, finishes or services outside the nominated refurbishment areas;
4. Remediation of undocumented structural defects, hidden conditions or hazardous materials; and
5. Changes to operational procedures, workflows or business processes.

4.4 Workshop Building – Works Excluded

The following are excluded from the Workshop Building Works unless expressly stated otherwise:

1. Specialist workshop plant, tools, machinery or equipment;
2. Commissioning, certification or calibration of client-supplied equipment;
3. Upgrades to retained workshop infrastructure not directly affected by the Works;
4. Operational shutdowns beyond those expressly identified in the construction staging; and
5. Modifications to external hardstand or operational yards outside the defined battery limits.

4.5 Warehouse Building – Works Excluded

The following are excluded from the Warehouse Building Works unless expressly stated otherwise:

1. Warehouse racking, storage systems and loose operational equipment;
2. Relocation or reinstatement of stored goods, inventory or client materials;
3. Upgrades to retained warehouse areas outside the nominated refurbishment scope;
4. Changes to logistics, operational workflows or warehouse management systems; and
5. Future fit-out works or expansions beyond the documented scope.

5.0 Design Responsibility

The Contractor is responsible for all design necessary to execute and complete the Works, including any design development, detailing, coordination and certification required to satisfy the Contract, the Architectural Specification, the Drawings and all statutory requirements.

1. Completing and, where necessary, developing and documenting all design beyond the Principal's concept / documented design to the level required for construction (including shop drawings, setting out information, coordination models and installation details);
2. All Contractor-designed elements (including temporary works, off-site fabricated components, structural connections, penetrations, supports, interfaces and any delegated design), and ensuring such design is fit for purpose and constructible;
3. All performance solutions (if proposed or required) including development, documentation, consultation, evidence, certification and approvals, and integration into the WUC. This includes, without limitation, performance solutions relating to:
4. Façade and building envelope systems (including weatherproofing, thermal performance, condensation control, acoustic performance and structural adequacy);
5. Roof water drainage and stormwater performance, including box gutters, overflows and discharge arrangements; and
6. Building access, maintenance and safety systems (including roof access, fall prevention and safe access provisions).
7. Coordination of all design disciplines and interfaces (architectural, structural, civil, mechanical, electrical, hydraulic, fire and communications), including clash resolution, integrated detailing, and ensuring all elements are compatible, buildable and meet performance requirements; and
8. Obtaining and providing all required design certifications, approvals and supporting records, including (where applicable) Queensland Form 15 and Form 12, and any other producer statements, certificates, test reports and documentation necessary to demonstrate compliance.

6.0 Authority Approvals & Fees

Unless expressly stated otherwise the Contractor is responsible for obtaining all authority approvals, permits, inspections, and certifications.

The Contractor must provision for all associated fees, including plumbing and drainage authority charges.

Prior approvals listed in the contract documents are provided by the Principal only where explicitly identified.

7.0 Project Management

7.1 General

The Contractor must provide all resources, including personnel, tools and systems to actively manage and report on activities required to deliver the WUC throughout the various phases of the WUC.

The Contractor must provide all deliverables listed in [Appendix B – Supplier Deliverable Requirement List \(SDRL\)](#) in accordance with the specified timeframes within same.

7.2 Management Plans

The Contractor's deliverables including a number of management plans are detailed in the SDRL.

All management plans must be developed specifically for this WUC and identify and explain key management strategies for the delivery of the Project.

The management plans are submitted for review and acceptance without relieving the Contractor, as Principal Contractor, of any statutory responsibility for the planning or execution of the WUC.

7.2.1 Project Execution Plan

The Contractor's Project Execution Plan (PEP) is the highest-level document which defines the project specific management structure and resources as well as the principles, processes, procedures, systems, tools and templates to be implemented for use throughout the Project.

The PEP is to refer to related subordinate function management plans (where these are required under the SDRL) and must include a document map showing all related subordinate management plans.

The PEP may contain the following information as a minimum:

1. Project organisation and responsibilities including organisation chart;
2. HSE management;
3. Quality management;
4. Risk management;
5. Engineering management;
6. Procurement, fabrication and subcontracting;
7. Project services and controls;
8. Materials management;
9. Construction management;
10. Commissioning;
11. Project Information Management; and
12. Project Closeout.

7.2.2 Construction Management Plan

The Construction Management Plan (CMP) is a subordinate plan of the PEP and outlines the Contractor's delivery of the onsite related portion of the scope.

As a condition to receiving approval to mobilise to Site, the Contractor must submit a detailed CMP to the Principal for approval by the Principal's Representative.

If not already incorporated in the PEP, the CMP may contain the following information:

1. Project organisational structure for Site activities, including key roles and responsibilities;
2. Mobilisation / demobilisation plan;
3. Rosters, working time and travel arrangements:
 - a. The rosters, work times and travel arrangements must be developed to comply with the Company's fitness for work and fatigue management policies;
 - b. Industrial relations; and
 - c. Duty of care including end of roster travel arrangements must be clearly outlined.
4. Survey investigations, verification and reporting;
5. Materials management;
6. Interface management;
7. Contractor and vendor management;

8. Transport and logistics;
9. Lift plan – Major lift’s required during construction:
 - a. Any crane-based works (including size and estimated durations required onsite for each crane);
 - b. Lift studies (where required by the SHMS);
 - c. The Contractor must develop detailed lift plans at the completion of lift studies; and
 - d. The Contractor must specify the requirements for the crane lifting pads (where applicable).
10. Contractor productivity management and reporting:
 - a. Reporting must include all subcontractor and supplier reporting requirements.
11. Plant and equipment requirements;
12. Construction methodology:
 - a. Work packages;
 - b. Execution methodology;
 - c. Site Acceptance Testing, Hold Points;
 - d. Construction sequencing and its alignment with the requirements of the granted shutdown windows;
 - e. Method of protection of existing buried services during construction;
 - f. Installation of conduit and cables methodology (including cable ladders and cable support structures);
 - g. System integration works;
 - h. Permits;
 - i. Isolations;
 - j. Work methodologies;
 - k. Operational approvals;
 - l. Site notifications; and
 - m. Risk assessments.
13. Completions; and
14. Demobilisation.

7.3 Project Information Management

The Contractor, in its role as Principal Contractor, is solely responsible for the establishment, implementation and ongoing management of project document control for the duration of the WUC.

The Contractor must:

1. Establish and maintain a document control system suitable for the management of all project documentation, including correspondence, drawings, calculations, schedules, registers, certifications, reports and records required under the Contract;
2. Ensure all documents are uniquely identified, version-controlled, reviewed, approved and distributed in accordance with agreed workflows and Superintendent’s directions;
3. Manage all drawing control, including revisions, superseded documents and drawing change records, such that only current, approved documents are used for the execution of the Works;
4. Ensure all documents generated by Subcontractors and Suppliers comply with the document control requirements of this Scope of Work; and
5. Maintain complete, accurate and auditable records sufficient to demonstrate compliance with the Contract, statutory requirements and quality obligations.

The Contractor must compile documentation progressively throughout execution of the WUC and must provide all required documents and records at the times specified in the Contract and the SDRL.

At completion of the Works and as a precondition to Practical Completion, the Contractor must handover the complete, controlled project document set (including As-Built documentation) to the Principal in the formats specified in the Contract.

Following handover, the Principal will assume responsibility for long-term document retention and integration into its enterprise systems.

7.3.1 Document Submission

Document submissions must include transmittal notice clearly noting the relevant Contract / Purchase Order number, person to issue to, person(s) to copy to, Document number(s), revision(s) and title(s), quantity, size, transmittal medium, and the reason for issue.

Contractor must supply required metadata for documents and drawings.

7.3.2 Commissioning Planning

The Contractor must prepare, maintain and implement a Commissioning Plan covering all building systems and services, including architectural, structural, mechanical, electrical, hydraulic, fire, communications and integrated systems.

The Commissioning Plan must be developed to the level of detail known at the time it is written. It must be revised as further detail becomes available.

The Commissioning Plan must identify and detail the following:

1. Project objectives;
2. Scope of commissioning works;
3. The commissioning team and their roles and responsibilities;
4. Commissioning requirements (process, documentation and technical);
5. The commissioning process and activities, including:
 - a. general commissioning sequence (including building tuning);
 - b. commissioning methodologies;
 - c. commissioning procedures;
 - d. witnessing of testing process;
 - e. monitoring, communication and reporting;
 - f. system dependencies and interactions; and
 - g. commissioning issues and the defects management process, including the identification of priority of the defect, non-conformance or issue.
6. Commissioning program;
7. If not detailed within other management plans for the project, the Commissioning Plan must include;
 - a. the documentation review and acceptance process;
 - b. client/operator training requirements and process;
 - c. operation and maintenance manuals requirements, including structure and delivery method; and
 - d. the completions process.

7.4 As Built Requirements

The Contractor must prepare, maintain and deliver complete, accurate and certified As-Built documentation reflecting the Works as constructed. As-Built documentation forms part of the Works and is a mandatory requirement for Practical Completion and final handover.

7.4.1 As-Built Drawings

The Contractor must:

1. Maintain a full set of construction drawings marked up progressively to record all approved changes, deviations and final installed conditions;
2. Clearly identify all approved deviations from Issued-For-Construction (IFC) drawings;
3. Ensure all dimensions, levels, coordinates and service locations reflect the Works as constructed; and
4. Certify each As-Built drawing as complete, dated and signed by the Contractor and the Principal's Representative.

As-Built drawings must be provided:

1. In signed PDF format;
2. In native editable file format, consistent with the original design platform; and
3. All drawings are to be on the Principal's template.

Electronic As-Built Data

Where As-Built information is maintained electronically:

1. As-Built data must be stored in clearly identifiable layers or revision structures;
2. File naming, revision control and metadata must align with the project document control requirements; and
3. Electronic As-Built records must be organised into logical, discipline-based folders suitable for transmission and long-term asset management.

Buried Services and Hidden Works

The Contractor must:

1. capture all buried, concealed or underground services installed, modified or made redundant as part of the Works;
2. Update buried services records within five (5) days of any change; and
3. Ensure locations, depths, alignments and reference points are accurately recorded and verifiable.

Certification and Supporting Records

As-Built documentation must be supported by:

1. Form 12 and Form 15 certifications (where applicable);
2. Test results, inspection records and commissioning data relevant to the installed systems; and
3. Approved design changes, DCRs and variation documentation impacting the final Works.

Timing and Handover

As-Built documentation must be:

1. Compiled progressively during execution of the Works;
2. Submitted in accordance with the SDRL milestones;
3. Fully complete, reviewed and accepted prior to the achievement of Practical Completion; and
4. Incorporated into the final Manufacturer's Data Report (MDR) and handover package.

7.4.2 Calculations

Calculations provided by the Contractor to the Superintendent must be presented in a clear, concise and legible format. Calculations must be set out in such a way as to be readily followed and understood by other suitably qualified professionals.

All calculations must be submitted electronically in PDF format as per timelines detailed in the in SDRL. Each calculation must detail the software package and version, and design criteria upon which the calculation was performed.

Additionally, all assumptions made in performing the calculation must be noted. Where calculations relate to a specific drawing or drawings, the calculations must be indexed to those drawings, and the drawings shall be submitted with the calculation.

On completion of the Works, the Contractor shall provide a full set of all relevant calculations certified As-Built.

Any modelling and calculations using software shall be submitted to the Superintendent in their native format, unless otherwise request by the Superintendent.

7.4.3 Manuals

Manuals may be compiled using Original Equipment Manufacturer (OEM) documentation, Supplier created documentation, or a combination of these two.

These manuals must specify operational and maintenance requirements for all equipment and specify recommended spares strategy for the operation of the equipment.

Manuals shall be provided in both hard and electronic copy in accordance with the timelines detailed in the SDRL.

The Contractor shall supply replacement drawings in as-Built status for manuals containing drawings where the drawings have been as-Built subsequent to issue of the manual.

Technical illustrations or photographs used in technical manuals shall be supplied in their native file format and as .JPEG files in a separate folder.

8.0 Reporting and Programming Requirements

8.1 Contract Program

The Contractor must, within 20 Business Days of the Date of Contract, submit to the Superintendent a Program for the execution of the WUC in accordance with clause 32 (Programming) of the Contract.

The Program must:

1. Be provided in the native scheduling file format approved by the Principal and in PDF format;
2. Be resource-loaded, identifying major commodity quantities and all direct hours required to execute the WUC; and
3. Be developed in accordance with the Contract, including the Scope of Work and any Superintendent's Direction.

The Program must reflect the Contractor's execution methodology and be accompanied by a narrative which must:

1. Describe the construction methodology in a logical and sequential manner;
2. Identify the materials, equipment and labour resources proposed to complete the WUC;
3. Identify all major and intermediate milestones, including interface milestones;
4. Describe the basis of assumptions, qualifications, durations, logic, sequencing and resource loading; and
5. Identify the critical path(s) for the WUC.

Unless otherwise approved by the Superintendent:

1. Activities must not exceed 30 days' duration;
2. Negative lags are not permitted; and
3. Mandatory constraints must not be used.

Upon acceptance by the Superintendent, the Program will constitute the Baseline Program for the purposes of monitoring progress under clauses 32 and 34 of the Contract.

The Contractor must update and resubmit the Program and Program narrative monthly, or at such other times as directed by the Superintendent and present the updated Program at the monthly progress meeting.

Each Program update must:

1. Reference the approved Baseline Program;
2. State the data date;
3. Include progress and commodity curves comparing planned, actual and forecast progress;
4. Include an equipment plan identifying type and quantity of equipment;
5. Include a critical path analysis and identification of impacts and mitigation measures;
6. Identify major and interface milestones with variance analysis;
7. Include procurement and fabrication activities, including transport to Site;
8. Include mobilisation and temporary works activities; and
9. Separately identify and code Principal-related interface activities.

If the Contractor proposes any amendment to logic or duration affecting the critical path, the Contractor must submit a revised Program narrative and variance analysis explaining the change and its impact on time and sequence.

8.2 Commodity Curves

The Contractor must prepare and submit commodity curves (S-curves) for major commodities, or such other commodities as directed by the Superintendent.

Commodity curves must:

1. Show planned, actual and forecast quantities over time;
2. Display both incremental and cumulative progress;

3. Include tabulated quantities, production rates and peak values; and
4. Align with the Program and Program Narrative.

Commodity curves must be updated weekly and submitted with the weekly report. Progress will be assessed against the planned quantities stated in the approved Program.

8.3 90-Day Lookahead schedule

The Contractor must submit a 90-day lookahead schedule covering the initial execution period or any other period directed by the Superintendent.

The 90-day lookahead schedule:

1. Must detail mobilisation, preparatory works and temporary works;
2. Will operate as an interim working schedule until acceptance of the Baseline Program; and
3. May be submitted in Excel format unless otherwise directed.

8.4 Monthly Status Report

The Contractor must submit a monthly status report documenting cost and schedule performance for the reporting period.

The report must:

1. Adopt a data date at the end of the reporting period (or as directed);
2. Include an overall WUC progress curve showing planned, actual and forecast progress;
3. Include discipline-based progress curves (Engineering, Procurement, Construction as applicable); and
4. Include a variance analysis explaining deviations from plan.

The monthly status report must include, as a minimum:

1. Cover Page (Project name, package details, Contractor, reporting period);
2. HSE Performance Summary, including incidents and corrective actions as per HSE-PROC-18;
3. Updated Program, submitted in PDF and native format, with narrative;
4. Critical Path Analysis, including changes from baseline;
5. Overall Progress Chart (% complete) supported by discipline weightings;
6. Updated Monthly Commodity Curves;
7. Delay and recovery narrative, including proposed mitigation;
8. Manpower gram, including headcount and man-hours by discipline;
9. Milestone comparison table (planned vs actual/forecast);
10. Cost report, including actuals, forecast to completion, approved variations and potential variations;
11. Cost and schedule risks and opportunities register;
12. Engineering Status Report (ESR), aligned to agreed rules of credit;
13. Procurement Status Report (PSR), aligned to purchase order control points; and
14. Quality Status Report, including QC inspections and NCR status.

8.5 Weekly & Daily Reports / Meetings

8.5.1 Contractor's Weekly Dashboard

The Contractor must submit a weekly dashboard presenting:

1. Safety statistics;
2. Commodity curves (12-week lookahead);
3. Overall earned-hours progress;
4. Performance factor (spent vs earned);
5. Manpower curves; and
6. Absenteeism statistics.

Material variances must be explained together with recovery actions.

8.5.2 Daily reports

The Contractor must prepare and submit a daily report before 10am each day for the Services performed the previous day.

Daily reports must be accurate, complete, and provided in the format and by the time nominated by the Principal (or its Representative).

As a minimum, each daily report must include:

1. Date and reporting period;
2. Work performed and progress against the program;
3. Labour and supervision on site (including subcontractors) and hours worked;
4. Plant and equipment used;
5. Materials delivered and used;
6. Location(s) of work and access constraints;
7. Safety matters, incidents, hazards identified and controls implemented;
8. Quality inspections/tests undertaken and nonconformances identified;
9. Delays, disruptions, variations, and any causes of lost time (including weather conditions) and their impact;
10. Interfaces with the Principal and other contractors; and
11. Photographs and sketches where requested or where they assist in recording progress or conditions.

The Contractor must retain supporting records for the information reported (including timesheets, delivery dockets and plant records) and make them available to the Principal on request.

Submission of a daily report does not relieve the Contractor of any obligation under the Contract, and does not constitute acceptance of the reported matters by the Principal.

If the Contractor fails to submit a daily report in accordance with this clause, the Principal may direct the Contractor to provide the report and/or provide additional supporting information, and the Principal may maintain its own records; however, the Principal's records do not relieve the Contractor of responsibility for accurate reporting.

8.5.3 Weekly Progress Meeting

The Contractor must attend and support a weekly progress meeting and submit a weekly progress pack addressing safety, quality, engineering, procurement and construction status, including interface risks.

The Contractor is to provision for taking and maintaining meeting minutes.

Meeting minutes are to be made available to the Superintendent and Principal for review no later than 24 hours after the occurrence meeting. Final copies are to be available no less than 48 hours prior to the next meeting or as instructed by the Principal.

8.5.4 Three-Week Lookahead Schedule

The Contractor must submit a three-week lookahead schedule at a level of detail suitable for supervisory execution, including:

1. Prior week actuals;
2. Three-week forecast quantities and hours;
3. Identified engineering or procurement constraints;
4. Any upcoming inspection obligations including hold points etc.

9.0 Health, Safety and Environment

The Contractor, in its capacity as Principal Contractor, is solely responsible for planning, managing and coordinating health, safety and environmental matters for the Works in accordance with the Contract, applicable WHS and environmental legislation, and the Principal's site requirements.

The Contractor shall implement and maintain appropriate HSE systems, including risk assessments and SWMS, ensure all personnel are suitably inducted, trained and supervised, and coordinate subcontractors and interfaces to protect workers, occupants and adjacent operations.

The Site must be always maintained in a safe condition, with effective control of access, noise, dust, hazardous substances and waste. All incidents and environmental events must be promptly reported and managed.

10.0 Quality Management System

The Contractor must maintain a Quality Management System that complies with all the requirements of AS/NZS ISO 9001 – 2016 ("ISO-9001") and the Principal's requirements.

A Quality Management Plan must be developed and submitted for Principal review and approval prior to mobilisation to Site.

Throughout the Project, the Contractor must ensure that they are working in compliance with the approved Quality Management Plan.

The Contractor must utilise their proprietary quality assurance processes and documents to capture the completions records associated with the Works.

The Contractor must submit to the Principal, a framework structure of the completion's documentation for review and endorsement prior to commencing Works. The submission must detail how the quality records are managed including the use of the testing and commissioning records.

The completions framework and supporting documentation must be arranged to support the progressive access and beneficial use of the Works by the Principal.

If required, the Contractor is to provide access to all necessary quality documentation to support the safe operation of the works during the beneficial use period. Final versions of the completion's documentation must be included in the Contractors MDR.

All testing and inspection data must be recorded progressively on the approved quality control check sheets and in a timely manner during the Contract. All reports prepared as part of the WUC must be prepared and submitted in a timely manner so as not to impede the progress of the WUC.

The following documents must be provided to permit audit and surveillance of the Contractor's quality system during the Scope of Works:

1. Quality Plan;
2. Inspection and Test Plan (ITP);
3. Quality Assurance and Quality Control Records; and
4. Manufacturing Data Reports (MDR).

The Contractor must perform all testing as specified in the referenced standards, specifications in the drawings.

The Contractor must demonstrate through quality records that all requirements under this Contract have been achieved.

The Contractor must have or provide appropriately qualified and experienced persons to carry out inspections and testing activities.

The Contractor must make available any information associated with its Quality Management System to the Principal on request (e.g. ITPs or material testing results).

The Contractor must be responsible for all Quality Assurance (QA) and Quality Control (QC) activities for the Project. This includes all inspection activities and the collation of all quality documentation to verify that the Works are completed and tested in accordance with this Scope of Work and referenced specifications and drawings.

The Principal reserves the right to inspect all materials and equipment during both offsite fabrication works and onsite construction and assembly activities.

10.1 Quality Plan

The Contractor must develop and implement a project specific Quality Management Plan (QMP) pursuant to the requirements of the approved PEP.

The plan must define the documented quality management system (QMS) to be applied by the Contractor throughout the performance of the Services, in accordance with the requirements of the Contract.

The scope of the QMP must cover the Quality Assurance and Quality Control (QA/QC) requirements for the Execution phase.

The Contractor and its Subcontractors must operate under a QMP, which meets the requirements of AS/NZS ISO 10005:2016 Quality Management Systems – Guidelines for Quality Plans.

The QMP must remain fully implemented and maintained throughout the Project duration.

The Contractor's QMP must define how its QMS will be configured, implemented, resourced and verified in order to realise the specified quality objectives.

The QMP must be provided to the Principal for review and acceptance prior to the commencement of any Works.

The QMP may contain, as agreed with the Principal:

1. Description of the WUC;
2. Quality Policy Statement identifying the Contractor's approach and commitment to Quality Management;
3. Quality objectives that are specific and measurable;
4. Project communication matrix and reporting requirements;
5. Organisational roles, responsibilities and authorities of key staff;
6. Organisation chart showing the various positions and their inter-relations;
7. Risk management, including any identified quality risks and mitigation actions;
8. Procurement management;
9. Description of how Subcontractors are to be selected, awarded and continuity of evaluation;
10. List of approved Subcontractors and the scopes of the subcontracted WUC;
11. List of related standards & procedures;
12. Management of change including scope, design, development and technical queries;
13. Verification and validation activities and certification;
14. Register of inspection and test plans (ITPs);
15. Nonconformities management;
16. Management of sourced and Free Issue materials and equipment;
17. Preservation and packaging of product, equipment protection, storage and handling;
18. Contractor's internal audit schedule and Contractor's Supplier audit schedule;
19. Management reviews; and
20. Procedure for documents and records management, including MDR management.

10.2 Inspection and Test Plans

Inspection and Test Plans (ITPs) templates must be issued to the Superintendent for endorsement at least three (3) weeks prior to the programmed commencement date.

No works shall commence prior to Principal review and endorsement of the ITP templates.

The ITP must identify those activities where inspection, testing and verification is deemed necessary by the Contractor and Superintendent to prevent the WUC progressing beyond a point where failure to implement such control may prejudice the integrity of the Works.

The Contractor must supply an ITR matrix of all Works.

ITPs may contain, as agreed with the Principal:

1. Identification of tests / inspections against specific requirements of the Contract;
2. Hold points and witness points;
3. The identification of records to be maintained;
4. Details of test equipment to be used; and
5. The Contractor and Principal progressively at agreed Hold and Witness points shall sign off ITPs. If Subcontractors are to be used, the main Contractor is wholly responsible for the WUC carried out by those Subcontractors.

Example activities and verifying documentation are included in Table 6 below.

Example Activity	Example Verifying Documentation
Preparation of drawings and documentation	Documents submitted to Company for review and comment.
Document control	Documents submitted to Company for review and comment.

Procurement of materials to be incorporated into the permanent works	Material test certificates, material analysis reports, heat numbers, NDT Reports (e.g. testing for laminations), certificates of compliance and certificates for weld consumables.
Weld procedures and weld qualifications	Weld procedures (for both prequalified and qualified welds) and associated NATA reports for qualified weld procedures.
Welder qualifications	Register of welders, welder testing records, and associated NATA reports for welder qualifications.
Assembly of components for fabrication	Dimensional and set-up quality control check sheets (completed and signed).
Welding (including pre-weld, welding and post weld activities)	Weld maps, pre and post weld dimensional check sheets, welder and weld traceability register, preheat, post weld heat treatment, completed and signed check sheets.
Stress relieving (if required)	Post weld heat treatment reports.
NDT inspections	Weld inspections and testing, associated NATA reports.
Machining	Machining register, machining tolerance and surface finish reports.
Dimensional and tolerance checks	Dimensional and tolerance validation report, compliance certificates.
Trial Assembly	Trial assembly reports and completed and signed check sheets.
Protective treatment preparation	Protective Treatment materials batch numbers, completed and signed check sheets for blasting and other preparation.
Protective treatment (including pre, during and post protective treatment application)	Completed and signed check sheets for application of protective treatment and curing, visual and dry film thickness measurement reports.
Non-conformances and corrective actions	Non-Conformance Reports (NCR's) and Corrective Action Reports (CAR's).
Final Inspection	Final Inspection Report.

The Principal will review the ITP's, insert hold points and witness points as required and return them to the Contractor within seven (7) days of receiving the ITP's.

For the purposes of this section, the following definitions apply:

1. Hold Points means a position in the production and inspection cycle beyond which WUC must not proceed without mandatory verification and acceptance by the Superintendent; and
2. Witness Points means a position in the production and inspection cycle where the option of attendance for the purposes of verification and acceptance may be exercised by the Superintendent.

The Contractor must give the Superintendent a minimum of seven (7) working days' notice of a forthcoming Hold or Witness Point.

All completed construction ITPs must be submitted to the Principal in the agreed format.

Proceeding past a Hold Point without the Principal's written approval shall constitute a non-conformance.

10.3 Requests for Information (RFI)

Requests for information are to be submitted in a format mutually agreed between the Contractor and the Principal.

10.4 Non-Conformances

The Contractor's Quality Plan must include a procedure for the management and control of non-conforming elements or processes for the WUC.

Any non-conforming components shall not be covered up nor be further incorporated into the goods in unless the non-conformance has been rectified.

A notice of any non-conformance must be provided to the Principal 24 hours after the issue being identified. Failure to comply with this shall constitute a non-conformance.

Any items found to be non-conforming must be removed by the Contractor at the Contractor's expense.

10.5 Quality Audits

The Principal may choose to carry out ad-hoc quality audits of the Contractor and/or its Subcontractors during the Project after giving the Contractor a minimum of three (3) working days' notice.

The Contractor must provide full access to the relevant facilities and must ensure full cooperation for these audits.

The Principal may engage specialist consultants and/or inspection agencies on its' behalf to perform the audits, quality assurance surveillance, inspections, checks and/or tests.

10.6 Manufacturers Data Report

Quality records must be maintained and supplied as part of a Manufacturer's Data Report (MDR).

A proposed MDR Index and method of management must be provided to the Principal for review and acceptance within four (4) weeks of contract award.

MDR contents must be collated, reviewed and compiled progressively by the Contractor.

Manufactured items delivered to Site for permanent installation and/or use must be supplied with either an approved MDR report or all records accepted by the Principal.

The following Manufacturer Data Reports (MDRs) must be submitted progressively and upon completion, as part of the quality assurance and handover process:

1. Design calculations and certifications (structural and mechanical);
2. Fabrication drawings and as-built drawings;
3. Welding procedures and welder qualifications;
4. Material test certificates (MTCs) for structural steel and liners;
5. Inspection and test plans (ITPs) and associated records;
6. Non-destructive testing (NDT) reports;
7. Coating and corrosion protection records;
8. Lifting and rigging plans;
9. Commissioning and functional test reports; and
10. O&M manuals and warranty documentation.

All MDRs must be compiled in accordance with the project's document control procedures and submitted for review and approval prior to commissioning.

11.0 General Site Requirements

11.1 Access to site:

All personnel will be required to be Stanwell inducted and issued a security card to allow access to the site.

All vehicles and machinery will also require the completion and approval of relevant forms (Vehicle Site Access, Powered Mobile Plant Acceptance Checklist, and Weed Hygiene Declaration).

11.2 Site evacuation / muster:

In the event of a site evacuation, all employees on site will muster at the closest designated muster point and remain there until directed otherwise.

11.3 Fitness for Work

The Contractor is to incorporate Principal's policies into their HSE plan for the Project.

11.4 Standard Work Hours

1. Working days: 7 days per week;
2. Working hours: 06:00hrs to 18:00hrs each working day; and
3. Delivery Times: Deliveries should be avoided during operation shift start and end periods, these are between 06:30hrs to 07:30hrs and 16:00hrs to 17:00hrs Monday to Friday.

12.0 Abbreviations and Definitions

Capitalised terms used in this Scope of Work have the same meaning as defined in the Contract, unless expressly stated otherwise.

Abbreviations used within this document are:

Abbrev.	Meaning
AS	Australian Standard
AS 4000	AS 4000 – General Conditions of Contract
AV	Audio Visual
BOM	Bureau of Meteorology
BCA	Building Code of Australia (now NCC)
CAR	Corrective Action Report
CEMP	Construction Environmental Management Plan
CMP	Construction Management Plan
DCR	Design Change Request
DFT	Dry Film Thickness
DLP	Defects Liability Period
DOC	Document (Document Control Reference)
EHS / HSE	Environment, Health and Safety
EV	Earned Value
FAT	Factory Acceptance Test
FC	Final Certificate

IFC	Issued for Construction
ITP	Inspection and Test Plan
ITR / ITC	Inspection and Test Record / Inspection Test Checksheet
JSEA	Job Safety and Environmental Analysis
KPI	Key Performance Indicator
LUNR	Stanwell Drawing Management System
MDR	Manufacturer's Data Report
MoM	Method of Measure
NCC	National Construction Code
NCR	Non-Conformance Report
NDT	Non-Destructive Testing
O&M	Operations and Maintenance
OEM	Original Equipment Manufacturer
OWP	Operational Works Permit
PC	Principal Contractor
PEP	Project Execution Plan
PM	Project Manager
PO	Purchase Order
PQ	Pre-Qualification
PSR	Procurement Status Report
QA	Quality Assurance
QC	Quality Control
QCLC	Queensland Charter for Local Content
QMP	Quality Management Plan
QMS	Quality Management System
QPP	Queensland Procurement Policy
RAG	Red / Amber / Green (status)
RFI	Request for Information
RoC	Rule of Credit
SDRL	Supplier Deliverable Requirement List
SHMS	Site Safety & Health Management System
SOW	Scope of Work
SPI	Schedule Performance Index
SPS	Stanwell Power Station
SWMS	Safe Work Method Statement
TRIFR	Total Recordable Injury Frequency Rate
WBS	Work Breakdown Structure
WHS	Work Health and Safety
WHSMP	Work Health and Safety Management Plan
WUC	Work under the Contract

13.0 Appendices

1. Appendix A - Existing Reference Drawings and Documents;
2. Appendix B - Supplier Deliverable Requirement List (SDRL);
3. Appendix C - Works included and excluded matrix; and
4. Appendix D - HSE-PROC-18-Principal Contractor.

14.0 Appendix A - Reference Drawings and Documents

Document Name	Document Number
A0 - SITE PLANS	
OVERALL SITE PLAN	A0-000
A1 - REGISTRY - EXISTING AND PROPOSED SITE PLANS	A0-001
A2 - WORKSHOP - EXISTING SITE PLAN	A0-002
A2 - WORKSHOP - PROPOSED SITE	A0-003
A3 - MAIN WARE HOUSE - EXISTING SITE PLAN	A0-004
A3 - MAIN WARE HOUSE - PROPOSED SITE PLAN	A0-005
A4 - NEW BUILD - EXISTING SITE PLAN	A0-006
A4 - NEW BUILD - PROPOSED SITE PLAN	A0-007
A1 REGISTRY	
EXISTING FLOOR & SLAB PLAN	A1-200
EXISTING CEILING & ROOF PLAN	A1-201
EXISTING ELEVATIONS	A1-202
PROPOSED FLOOR & SLAB PLAN	A1-300
PROPOSED CEILING ROOF	A1-301
AS1428.1 CLEARANCE FLOOR COVERING PLAN	A1-302
FURNITURE LAYOUT	A1-303
PROPOSED ELEVATIONS	A1-400
PROPOSED SECTION	A1-500
SECTION DETAILS	A1-501
INTERNAL ELEVATION 1 - LUNCH ROOM	A1-600
INTERNAL ELEVATION 2 - OPEN OFFICE	A1-601
INTERNAL ELEVATION 3 - MALE AMENITIES	A1-602
INTERNAL ELEVATION 4 - FEMALE AMENITIES	A1-603
INTERNAL ELEVATION 5 - MEETING ROOM	A1-604
INTERNAL ELEVATION 6 - WINDOW & DOOR SCHEDULE	A1-700
A2 WORKSHOP	
EXISTING FLOOR PLAN	A2-200
EXISTING SLAB PLAN	A2-201
EXISTING CEILING PLAN	A2-202
EXISTING ROOF PLAN	A2-203
ELEVATION ELEVATIONS	A2-204
PROPOSED FLOOR PLAN	A2-300
PROPOSED SLAB PLAN	A2-301
PROPOSED CEILING PLAN	A2-302
PROPOSED ROOF PLAN	A2-303
AS1428.1 CLEARANCE	A2-304
FLOOR COVERING PLAN	A2-305
FURNITURE LAYOUT	A2-306
PROPOSED ELEVATIONS	A2-400
PROPOSED SECTION	A2-500
SECTION DETAILS	A2-501

INTERNAL ELEVATIONS 1 - PARCEL ROOM	A2-600
INTERNAL ELEVATIONS 2 - OPEN OFFICE	A2-601
INTERNAL ELEVATIONS 3 - CENTRAL MEETING ROOMS	A2-602
INTERNAL ELEVATIONS 4 - FEMALE AMENITIES	A2-603
INTERNAL ELEVATIONS 5 - MALE AMENITIES	A2-604
INTERNAL ELEVATIONS 6 - LUNCH ROOM	A2-605
DOOR SCHEDULE	A2-700
WINDOW SCHEDULE	A2-701
A3 MAIN WAREHOUSE	
EXISTING FLOOR PLAN	A3-201
EXISTING SLAB PLAN	A3-202
EXISTING CEILING PLAN	A3-203
EXISTING ROOF PLAN	A3-204
ELEVATION ELEVATIONS	A3-205
PROPOSED FLOOR PLAN	A3-300
PROPOSED SLAB PLAN	A3-301
PROPOSED CEILING PLAN	A3-302
PROPOSED ROOF PLAN	A3-303
AS1428.1 CLEARANCE	A3-304
FLOOR COVERING PLAN	A3-305
FURNITURE LAYOUT	A3-306
PROPOSED ELEVATIONS	A3-400
INTERNAL ELEVATIONS 1 - ENTRY / HALLWAY	A3-600
INTERNAL ELEVATIONS 2 - ARCHIVES / SMALL MEET	A3-601
INTERNAL ELEVATIONS 3 - LUNCH ROOM	A3-602
INTERNAL ELEVATIONS 4 - MALE AMENITIES	A3-603
INTERNAL ELEVATIONS 5 - FEMALE AMENITIES	A3-604
DOOR SCHEDULE	A3-700
WINDOW SCHEDULE	A3-701
A4 NEW BUILD	
PROPOSED FLOOR PLAN	A4-300
PROPOSED SLAB PLAN	A4-301
PROPOSED BLOCK SETOUT	A4-302
PROPOSED CEILING PLAN	A4-303
PROPOSED ROOF PLAN	A4-304
AS1428.1 CLEARANCE	A4-305
FLOOR COVERING PLAN	A4-306
FURNITURE LAYOUT	A4-307
PROPOSED ELEVATIONS	A4-400
PROPOSED SECTION	A4-500
PROPOSED SECTIONAL DETAILS	A4-501
PROPOSED SECTIONAL DETAILS	A4-502
INTERNAL ELEVATIONS 1 - MEETING ROOM 1 / SMALL MEETING	A4-600
INTERNAL ELEVATIONS 2 - LUNCH ROOM	A4-601
INTERNAL ELEVATIONS 3 - MALE AMENITIES	A4-602

INTERNAL ELEVATIONS 4 - FEMALE AMENITIES	A4-603
INTERNAL ELEVATIONS 5 - CENTRAL CORRIDOR	A4-604
INTERNAL ELEVATIONS 6 - CONSULMABLES	A4-605
DOOR & WINDOW SCHEDULE	A4-700
REGISTRY BUILDING	
FORM 15	25-595_A1/FORM 15
GENERAL NOTES	25-595_A1/01
EXISTING & DEMOLITION PLAN / PROPOSED SLAB & FOOTING PLAN	25-595_A1/02
SLAB & FOOTING & MASONRY DETAILS	25-595_A1/03
PROPOSED ROOF FRAMING PLAN & DETAILS	25-595_A1/04
WORKSHOP	
GENERAL NOTES	25-595_A2/01
PROPOSED SLAB & FOOTING PLAN & CALLOUT	25-595_A2/02
SLAB & FOOTING DETAILS	25-595_A2/03
PROPOSED ROOF FRAMING PLAN & DETAILS	25-595_A2/04
WAREHOUSE	
GENERAL NOTES	25-595_A3/01
PROPOSED SLAB & FOOTING PLAN & DETAILS	25-595_A3/02
PROPOSED WORKS	
COVER SHEET AND LOCALITY	25-595_A4/100
EXISTING LAYOUT & SERVICES	25-595_A4/101
GENERAL DESIGN LAYOUT	25-595_A4/102
ANNOTATED SECTIONS AND PAVEMENT DETAIL	25-595_A4/103
BULK EARTHWORKS AND SUBGRADE SURFACES	25-595_A4/104
DRAINAGE LAYOUT	25-595_A4/105
LANEWAY (MC01) SETOUT AND LONG SECTION	25-595_A4/106
CONCRETE FEATURES SETOUT PLAN	25-595_A4/107
LINEMARKING AND SIGNAGE	25-595_A4/108
ELECTRICAL	
ELECTRICAL SITE PLAN	E-01
ELECTRICAL REGISTRY	E-02
ELECTRICAL WORKSHOP	E-03
ELECTRICAL MAIN WAREHOUSE	E-04
ELECTRICAL NEW BUILD	E-05
MECHANICAL	
MECHANICAL SITE PLAN	M-01
MECHANICAL REGISTRY	M-02
MECHANICAL WORKSHOP	M-03
MECHANICAL MAIN WAREHOUSE	M-04
MECHANICAL NEW BUILD	M-05
HYDRAULIC SERVICES	
COVER SHEET, LOCALITY PLAN	H.01.01
DEMOLITION PLAN, DRAINAGE & WATER	H.03.01
PROPOSED GROUND FLOOR PLANS - DRAINAGE & WATE	H.03.02
COVER SHEET, LOCALITY PLAN	H.01.01

DEMOLITION PLAN, DRAINAGE & WATER	H.03.01
PROPOSED GROUND FLOOR PLANS - DRAINAGE & WATE	H.03.02
COVER SHEET, LOCALITY PLAN	H.01.01
SPECIFICATION NOTES, SCHEDULES	H.01.02
SITE & GROUND FLOOR - FIRE HYDRANT & FIRE HOSEREEL HOSE REACH PLA	H.02.01
DEMOLITION PLAN	H.03.01
SITE & GROUND FLOOR - DRAINAGE, STORMWATER, WATER & FIRE SERVICE	H.03.02
GROUND FLOOR - WATE & FIRE SERVICES, DIAGRAMMATICS	H.03.03
ROOF PLAN - DRAINAGE	H.04.01
DETAILS	H.05.01
DETAILS	H.05.02
COVER SHEET, LOCALITY PLAN	H.01.01
DEMOLITION PLAN, DRAINAGE & WATER	H.03.01
PROPOSED GROUND FLOOR PLANS - DRAINAGE & WATE	H.03.02

15.0 Appendix B – Supplier Deliverable Requirement List (SDRL)

As part of successful completion of the project the Contractor must provide the deliverables set out below, and any other deliverables required under the Contract and as directed by the Principal.

Required Deliverables:

Reference	Deliverable	SOW Clause(s)	Timing	Format
M01	Project Execution Plan (PEP)	7.2, 7.2.1	Prior to mobilisation	PDF
M02	Construction Management Plan (CMP)	7.2, 7.2.2	Prior to mobilisation	PDF
M03	WHS Management Plan (WHSMP)	9.0; Appendix D – HSE-PROC-18	≤10 BD from mobilisation	PDF
M04	Construction Environmental Management Plan (CEMP)	9.0; Appendix D – HSE-PROC-18 PC	≤10 BD from mobilisation	PDF
M05	Interface Management Plan	1.6, 1.6.1, 7.2	Prior to mobilisation	PDF
M06	Detailed Mobilisation Plan	7.2.2	Prior to mobilisation	PDF
M07	Project Organisation Chart & Resource Matrix	7.2.1	Prior to mobilisation	PDF
M08	Contract Program (Baseline)	8.1	≤20 BD from Contract Award	Native (P6/MS Project) + PDF
M09	Program Narrative / Basis of Program	8.1	With baseline program	PDF
M10	Monthly Program Updates & Narrative	8.4	Monthly	Native + PDF
M11	90-Day Lookahead Schedule	8.3	Monthly / as directed	Excel / PDF
M12	3-Week Lookahead Schedule	8.5.4	Weekly	Excel / PDF
M13	Risk Register (Project & Construction)	7.2, 7.2.1	Progressive; updated monthly	Excel / PDF
M14	Procurement Register	3.4; 8.1; 8.4	Progressive	Excel
M15	Change Management Register	GCC Clause 40	Progressive	Excel
M16	Document Control Procedure	7.3; 10.6	Prior to mobilisation	PDF
M17	Communications Plan	7.2	Prior to mobilisation	PDF
M18	Stakeholder Management Plan	1.6, 7.2	Prior to mobilisation	PDF

Reference	Deliverable	SOW Clause(s)	Timing	Format
R01	Monthly Status Report	8.4	Monthly (within 5 BD of month end)	PDF
R02	Weekly Contractor Dashboard	8.5.1	Weekly (by COB Friday)	PDF
R03	Weekly Progress Meeting Pack	8.5.2	Weekly (24 hrs prior to meeting)	PDF
R04	Meeting Minutes	8.5.2	Draft ≤24 hrs / Final ≤48 hrs	PDF
R05	Commodity Curves (S-Curves)	8.2	Weekly	PDF / Excel
R06	Workforce & Equipment Reports	8.4	Weekly	Excel / PDF
R07	Critical Path Analysis	8.1	Monthly	PDF
R08	Delay Notices	GCC Clause 41	Within 5 BD of delay event	Written Notice
R09	Extension of Time Claims	GCC Clause 41	Within 10 BD per GCC	Written Claim + Supporting Docs
R10	Progress Photographs	8.4	Weekly minimum	Digital Images (JPG/PNG)
D01	Contractor Design Documents (All Disciplines)	3.3; 5.0	Prior to IFC	PDF + Native (DWG/RVT)
D02	Design Calculations (Structural / Services)	3.3; 7.4.2	With design submissions	PDF + Native
D03	Performance Solutions & Certifications	3.3	Prior to construction	PDF
D04	Form 15 Certifications (QBCC)	7.4; 7.4.1; 10.6	Prior to PC	PDF (Original)
D05	Form 12 As-Built Certifications	7.4; 7.4.1; 10.6	Prior to PC	PDF (Original)
D06	Structural Steel Design & Detailing	3.6; 5.0	Prior to fabrication	PDF + Native
D07	Mechanical Services Design	3.9; 5.0	Prior to IFC	PDF + Native
D08	Electrical Services Design	3.10; 5.0	Prior to IFC	PDF + Native
D09	Hydraulic Services Design	3.11; 5.0	Prior to IFC	PDF + Native
D10	Fire Services Design	3.8; 5.0	Prior to IFC	PDF + Native
D11	Civil & Stormwater Design	3.7; 5.0	Prior to IFC	PDF + Native
D12	Geotechnical Report (if required)	3.7	Prior to foundation design	PDF
D13	Survey Set-Out Data	3.7	Prior to construction	PDF + CAD

Reference	Deliverable	SOW Clause(s)	Timing	Format
D14	Specification Compliance Schedules	5	With design submissions	Excel / PDF
DOC01	Shop Drawings (All Trades)	3.4; 7.3	As per ITP; prior to fabrication	PDF + Native
DOC02	IFC Drawings (Issued for Construction)	7.3	Prior to works	PDF + Native
DOC03	Drawing Change Requests (DCRs)	7.3; 7.4.1	As required	LUNR Workflow
DOC04	As-Built Drawings	7.4; 7.4.1	Prior to PC	PDF + Native (DWG)
DOC05	Buried Services Records	7.4.1	≤5 BD from installation/change	PDF + Native
DOC06	Document Transmittals	7.3	With each submission	LUNR Workflow / PDF
DOC07	RFI Register & Responses	7.3	Progressive	Excel / PDF
DOC08	Superseded Drawing Register	7.3	Progressive	Excel
Q01	Quality Management Plan (QMP)	10.0; 10.1	Prior to mobilisation	PDF
Q02	ITP Register / Matrix	10.2	Prior to works	PDF / Excel
Q03	Inspection & Test Plans (ITPs) - All Disciplines	10.2	≥3 weeks prior to activity	PDF
Q04	Inspection & Test Records (ITRs)	10.0; 10.2	Progressive	PDF
Q05	Non-Conformance Reports (NCRs)	10.4	Within 24 hrs of identification	PDF
Q06	NCR Closeout Evidence	10.4	Prior to covering/proceeding	PDF + Photos
Q07	Quality Audit Reports (Internal)	10.5	As conducted	PDF
Q08	Quality Audit Reports (External)	10.5	As conducted by Principal	PDF
Q09	Hold Point Release Requests	10.2	≥48 hrs prior to hold point	PDF / Email
Q10	Witness Point Notifications	10.2	≥24 hrs prior to witness point	PDF / Email
Q11	Material Test Certificates	10.2; 10.6	Prior to use / with ITRs	PDF
Q12	Concrete Test Results (Slump, Strength)	10.2	Per pour; 7/28 day results	PDF
Q13	Weld Inspection Reports	10.2	Per weld activity	PDF
Q14	Coating / Painting Inspection Reports	10.2	Per application	PDF
OF01	Off-Site Fabrication QA Plan	3.4; 10.0	Prior to fabrication	PDF
OF02	Fabrication ITPs & Records	3.4; 10.2	Progressive	PDF

Reference	Deliverable	SOW Clause(s)	Timing	Format
OF03	Material Traceability Records	10.2; 10.6	Progressive	PDF
OF04	Factory Acceptance Test (FAT) Reports	3.12; 10.6	Prior to dispatch	PDF
OF05	Transport & Handling Plan	3.5	Prior to dispatch	PDF
OF06	Pre-Delivery Inspection Reports	3.4	Prior to dispatch	PDF
OF07	Receiving Inspection Reports	10.2	Upon delivery to site	PDF
C01	Commissioning Plan	3.12	Prior to commissioning	PDF
C02	Pre-Commissioning Checklists	3.12	Prior to testing	PDF
C03	System Test Reports (All Services)	3.12; 10.0	Progressive	PDF
C04	Integrated Systems Test Reports	3.12	Prior to PC	PDF
C05	Fire Systems Test & Certifications	3.8; 3.12; 7.4	Prior to PC	PDF
C06	Commissioning Records (Full Set)	3.12; 7.4	Progressive	PDF
C07	Electrical Installation Test Reports	3.10; 3.12	Prior to PC	PDF
C08	Mechanical Services Commissioning	3.9; 3.12	Prior to PC	PDF
C09	HVAC Commissioning & Balancing Reports	3.9; 3.12	Prior to PC	PDF
C10	Hydraulic Services Test Reports	3.11; 3.12	Prior to PC	PDF
C11	Lift Installation Commissioning (if applicable)	3.12	Prior to PC	PDF
C12	BMS / Controls Commissioning	3.9; 3.10; 3.12	Prior to PC	PDF
C13	Security Systems Commissioning	3.10; 3.12	Prior to PC	PDF
WHS01	Principal Contractor WHS Management Plan	9.0; Appendix D	Prior to mobilisation	PDF
WHS02	Site-Specific Safety Plan	9	Prior to mobilisation	PDF
WHS03	Safe Work Method Statements (SWMS) - All High Risk	9.0; WHS Regulations	Prior to high-risk work	PDF
WHS04	Job Safety Analysis (JSA) / JHA	9	Prior to task commencement	PDF
WHS05	Site Safety Rules & Induction Materials	9	Prior to mobilisation	PDF
WHS06	Induction Attendance Records	9	Prior to personnel site access	Excel / PDF
WHS07	Toolbox Meeting Records	9	Weekly minimum	PDF
WHS08	Site Safety Inspection Reports	9	Weekly minimum	PDF

Reference	Deliverable	SOW Clause(s)	Timing	Format
WHS09	Incident / Accident Reports	9.0; WHS Regulations	Immediately upon occurrence	PDF
WHS10	Notifiable Incident Reports	9.0; WHS Act	Immediately to Regulator	As per WHS Regulations
WHS11	Hazard Register	9	Progressive	Excel / PDF
WHS12	Training & Competency Records	9	Prior to work commencement	PDF / Certificates
WHS13	Licences & Tickets Register	9	Prior to work; updated	Excel / PDF
WHS14	Emergency Response Plan	9	Prior to mobilisation	PDF
WHS15	Emergency Drill Records	9	As conducted	PDF
WHS16	First Aid Records	9	Progressive	PDF
WHS17	Asbestos Register Review (Refurb Areas)	9.0; Appendix C	Prior to demolition/refurb	PDF
WHS18	Asbestos Removal Control Plan	9.0; WHS Regulations	Prior to asbestos removal	PDF
WHS19	Asbestos Clearance Certificates	9.0; WHS Regulations	Upon removal completion	PDF
WHS20	Confined Space Entry Permits	9	Prior to entry	Permit Form
WHS21	Hot Work Permits	9	Prior to hot work	Permit Form
WHS22	Working at Heights Permits / Plans	9	Prior to work at heights	Permit / Plan
WHS23	Excavation Permits	9	Prior to excavation	Permit Form
WHS24	Crane & Lifting Plans	9.0; 11.3	Prior to lifting operations	PDF + SWMS
WHS25	Plant & Equipment Registers	9	Progressive	Excel
WHS26	Plant Pre-Start Checklists	9	Daily	Checklists
ENV01	Construction Environmental Management Plan (CEMP)	9	≤10 BD from mobilisation	PDF
ENV02	Erosion & Sediment Control Plan (ESCP)	9	Prior to earthworks	PDF + Drawing
ENV03	Waste Management Plan	9	Prior to mobilisation	PDF
ENV04	Waste Tracking Records	9	Progressive	PDF / Excel
ENV05	Hazardous Materials Register	9	Progressive	Excel
ENV06	SDS (Safety Data Sheets) Register	9	Progressive	PDF / Register
ENV07	Spill Response Procedures	9	Prior to mobilisation	PDF
ENV08	Environmental Incident Reports	9	Within 24 hrs of incident	PDF

Reference	Deliverable	SOW Clause(s)	Timing	Format
ENV09	Noise & Vibration Monitoring Reports	9	As required / directed	PDF
ENV10	Dust Monitoring Records	9	As required	PDF
INS01	Certificate of Currency	GCC Clause 16; Annexure A	Prior to mobilisation; annual renewal	Certificate
INS02	Certificate of Currency - Workers Compensation	GCC Clause 16	Prior to mobilisation; annual renewal	Certificate
INS03	Certificate of Currency	GCC Clause 16; Annexure A	Prior to mobilisation; maintained 6 yrs	Certificate
INS04	Certificate of Currency - Motor Vehicle	GCC Clause 16	Prior to mobilisation	Certificate
INS05	Contract Works Insurance Evidence	GCC Clause 16	Prior to mobilisation	Certificate
INS06	Security (Bank Guarantee / Insurance Bond) - 5%	GCC Clause 5; Annexure A	Prior to mobilisation	Original Bank Guarantee / Bond
INS07	Security (Retention Release)	GCC Clause 5	Post Final Completion	As per GCC
INS08	Payment Claims (Progress Claims)	GCC Clause 37	Monthly (by 25th of month)	Written Claim + Supporting Docs
INS09	Payment Claim Substantiation	GCC Clause 37	With each claim	PDF + Excel breakdown
INS10	Final Payment Claim	GCC Clause 37	Post Final Completion	Written Claim
INS11	Statutory Declaration (Subcontractor Payments)	GCC Clause 37	With payment claims	Statutory Declaration Form
SUB01	Subcontractor List (Proposed)	3.4; 9.1	Prior to engagement	Excel / PDF
SUB02	Subcontractor Qualifications & Licences	9.1	Prior to engagement	Certificates / Licences
SUB03	Subcontractor Insurance Certificates	9.1	Prior to engagement	Certificates
SUB04	Subcontractor WHS Documentation	9.0; 9.1	Prior to engagement	PDF
SUB05	Subcontractor Performance Reports	9.1	As required	PDF

Reference	Deliverable	SOW Clause(s)	Timing	Format
PER01	Building Approval Application	3.3; 7.4	Prior to construction	Application + Supporting Docs
PER02	Development Approval (if required)	3.3	Prior to construction	Application + Supporting Docs
PER03	Building Approval / Permit	3.3; 7.4	Prior to construction	Certificate
PER04	Final Inspection Certificate	7.4; 10.6	Prior to PC	Certificate
PER05	Occupancy Certificate / Form 21	7.4; 10.6	Prior to PC	Certificate
PER06	Permits & Licences Register	3.3; 7.4	Prior to works & ongoing	Excel / PDF
PER07	Road Opening Permits (if required)	3.7	Prior to works	Permit
PER08	Service Connection Approvals	3.7	Prior to connection	Approvals
PER09	Fire Engineering Reports / Approvals	3.8	Prior to construction	PDF
SM01	Site Management Plan	11.1	Prior to mobilisation	PDF
SM02	Site Layout Plan	11.1	Prior to mobilisation	PDF + DWG
SM03	Traffic Management Plan	11.2	Prior to mobilisation	PDF
SM04	Site Security Plan	11.1	Prior to mobilisation	PDF
SM05	Site Access Procedures	11.1; 1.6	Prior to mobilisation	PDF
SM06	Hoarding & Fencing Plan	11.1	Prior to mobilisation	PDF + Drawing
SM07	Site Signage Plan	11.1	Prior to mobilisation	PDF
SM08	Temporary Services Plan	11.1	Prior to mobilisation	PDF
SM09	Site Establishment Checklist	11.1	Upon mobilisation	PDF
SM10	Daily Site Diary	8.4	Daily	Written Record
H01	Operations & Maintenance Manuals	7.4.3; 3.13	Prior to PC (draft 4 wks prior)	PDF + Hard Copy (3 sets)
H02	Asset Registers (Services & Equipment)	3.13; 7.3	Prior to PC	Excel
H03	Warranties & Guarantees	3.13; GCC Clause 47	Prior to PC	PDF (Originals)
H04	Training Materials & Attendance Records	3.13	Prior to PC	PDF

Reference	Deliverable	SOW Clause(s)	Timing	Format
H05	Final Manufacturer's Data Report (MDR)	10.6; 7.4	Prior to PC	PDF
H06	Defects / Punch List	3.13; GCC Clause 42	Prior to PC	Excel / PDF
H07	Defects Rectification Evidence	GCC Clause 45	During DLP	PDF + Photos
H08	Practical Completion Notice	GCC Clause 42	Upon achieving PC criteria	Written Notice
H09	Final Completion Notice	GCC Clause 42	End of DLP	Written Notice
H10	Site Demobilisation Plan	11.1	Prior to demobilisation	PDF
H11	Site Reinstatement Records	11.1	Upon demobilisation	PDF + Photos
H12	Spare Parts Schedule	3.13	Prior to PC	Excel / PDF
H13	Special Tools List	3.13	Prior to PC	Excel / PDF
H14	As-Constructed Survey	7.4.1	Prior to PC	PDF + CAD
H15	Building Information Model (if required)	7.4	Prior to PC	Native (RVT/IFC)
GCC01	Signed Contract Documents	GCC Clause 1	At Contract Award	Original Signed Documents
GCC02	Evidence of Site Conditions Review	GCC Clause 12	Prior to Contract Award	Written Acknowledgment
GCC03	Variation Requests	GCC Clause 40	As required	Written Request + Substantiation
GCC04	Variation Quotations	GCC Clause 40	Within timeframe per GCC	Written Quotation
GCC05	Daywork Records	GCC Clause 40	Daily (if applicable)	Signed Records
GCC06	Claims for Additional Payment	GCC Clause 46	Per GCC requirements	Written Claim + Substantiation
GCC07	Dispute Notices	GCC Clause 47	Per GCC requirements	Written Notice
GCC08	Performance Reports (Superintendent Directed)	GCC Clause 23	As directed	PDF
T01	New Office Building - Structural Design Package	3.6; 4.0	Prior to construction	PDF + Native
T02	New Office Building - Architectural Design Package	4	Prior to construction	PDF + Native
T03	Registry Building Refurbishment - Scope Confirmation	4.0 (Registry)	Prior to works	PDF

Reference	Deliverable	SOW Clause(s)	Timing	Format
T04	Workshop Building Refurbishment - Scope Confirmation	4.0 (Workshop)	Prior to works	PDF
T05	Warehouse Building Refurbishment - Scope Confirmation	4.0 (Warehouse)	Prior to works	PDF
T06	Demolition Plan & Method Statement	4.0; Refurb works	Prior to demolition	PDF
T07	Structural Steel Connection Design	3.6	Prior to fabrication	PDF + Calcs
T08	Roof Framing Design	3.6	Prior to construction	PDF + Native
T09	External Cladding Submittals	3.6	Prior to procurement	Samples + Data Sheets
T10	Glazing & Window Submittals	3.6	Prior to procurement	Samples + Data Sheets
T11	Flooring Submittals	4	Prior to procurement	Samples + Data Sheets
T12	Ceiling System Submittals	4	Prior to procurement	Samples + Data Sheets
T13	Door Hardware Schedule	4	Prior to procurement	PDF / Excel
T14	Paint & Finishes Schedule	4	Prior to procurement	PDF + Samples
T15	Joinery & Fitout Submittals	4	Prior to fabrication	Shop Drawings + Samples
T16	Switchboard Design & Submittals	3.1	Prior to fabrication	PDF + Single Line Diagram
T17	Lighting Design & Submittals	3.1	Prior to procurement	PDF + Data Sheets
T18	Data/Comms Infrastructure Design	3.1	Prior to IFC	PDF
T19	Air Conditioning Design & Equipment Submittals	3.9	Prior to procurement	PDF + Data Sheets
T20	Ventilation Design	3.9	Prior to IFC	PDF + Calcs
T21	Plumbing Design & Fixture Schedule	3.11	Prior to procurement	PDF + Data Sheets
T22	Stormwater Design & Calcs	3.7; 3.11	Prior to construction	PDF + Calcs
T23	Fire Detection & Alarm System Design	3.8	Prior to IFC	PDF
T24	Emergency Lighting Design	3.8; 3.10	Prior to IFC	PDF
T25	External Works Design (Paving, Landscaping)	3.7	Prior to construction	PDF + Native

Reference	Deliverable	SOW Clause(s)	Timing	Format
T26	Signage Schedule	4	Prior to procurement	PDF

Management & Planning Deliverables

Ref	Deliverable	SOW Clause(s)	Timing	Format	Review / Acceptance
M01	Project Execution Plan (PEP)	7.2, 7.2.1	Prior to mobilisation	PDF	Principal
M02	Construction Management Plan (CMP)	7.2, 7.2.2	Prior to mobilisation	PDF	Principal
M03	WHS Management Plan (WHSMP)	9.0; Appendix C – HSE-PROC-18	≤10 BD from mobilisation	PDF	Superintendent
M04	Construction Environmental Management Plan (CEMP)	9	≤10 BD from mobilisation	PDF	Superintendent
M05	Interface Management Plan	1.6, 1.6.1, 7.2	Prior to mobilisation	PDF	Superintendent
M06	Detailed Mobilisation Plan	7.2.2	Prior to mobilisation	PDF	Superintendent
M07	Project Organisation Chart & Resource Matrix	7.2.1	Prior to mobilisation	PDF	Superintendent
M08	Contract Program (Baseline)	8.1	≤20 BD from Contract	Native + PDF	Superintendent
M09	Program Narrative / Basis of Program	8.1	With baseline program	PDF	Superintendent
M10	Monthly Program Updates & Narrative	8.1	Monthly	Native + PDF	Superintendent
M11	90-Day Lookahead Schedule	8.3	Monthly / as directed	Excel / PDF	Superintendent
M12	3-Week Lookahead Schedule	8.5.3	Weekly	Excel / PDF	Superintendent
M13	Risk Register (Project & Construction)	7.2, 7.2.1	Progressive	Excel / PDF	Superintendent
M14	Procurement Register	3.4; 8.1; 8.4	Progressive	Excel	Superintendent

Reporting Deliverables

Ref	Deliverable	SOW Clause(s)	Timing	Format	Review / Acceptance
R01	Monthly Status Report	8.4	Monthly	PDF	Superintendent
R02	Weekly Contractor Dashboard	8.5.1	Weekly	PDF	Superintendent
R03	Weekly Progress Meeting Pack	8.5.2	Weekly	PDF	Superintendent

R04	Meeting Minutes	8.5.2	≤24 hrs draft / ≤48 hrs final	PDF	Superintendent
R05	Commodity Curves (S-Curves)	8.2	Weekly	PDF / Excel	Superintendent
Design & Engineering Deliverables					
Ref	Deliverable	SOW Clause(s)	Timing	Format	Review / Acceptance
D01	Contractor Design Documents (All Disciplines)	3.3; 5.0	Prior to IFC	PDF + Native	Superintendent
D02	Design Calculations (Structural / Services)	3.3; 7.4.2	With design submissions	PDF + Native	Superintendent
D03	Performance Solutions & Certifications	3.3	Prior to construction	PDF	Certifier / Principal
D04	Form 15 Certifications	7.4; 7.4.1; 10.6	Prior to PC	PDF	Superintendent
D05	Form 12 As-Built Certifications	7.4; 7.4.1; 10.6	Prior to PC	PDF	Superintendent
Drawings & Document Control					
Ref	Deliverable	SOW Clause(s)	Timing	Format	Review / Acceptance
DOC01	Shop Drawings (All Trades)	3.4; 7.3	As per ITP	PDF + Native	Superintendent
DOC02	IFC Drawings	7.3	Prior to works	PDF + Native	Superintendent
DOC03	Drawing Change Requests (DCRs)	7.3; 7.4.1	As required	LUNR workflow	Superintendent
DOC04	As-Built Drawings	7.4; 7.4.1	Prior to PC	PDF + Native	Superintendent
DOC05	Buried Services Records	7.4.1	≤5 days from change	PDF + Native	Superintendent
Quality & Inspection Deliverables					
Ref	Deliverable	SOW Clause(s)	Timing	Format	Review / Acceptance
Q01	Quality Management Plan (QMP)	10.0; 10.1	Prior to mobilisation	PDF	Principal
Q02	ITP Register / Matrix	10.2	Prior to works	PDF	Superintendent
Q03	Inspection & Test Plans (ITPs)	10.2	≥3 weeks prior	PDF	Superintendent
Q04	Inspection & Test Records (ITRs)	10.0; 10.2	Progressive	PDF	Superintendent
Q05	Non-Conformance Reports (NCRs)	10.4	As required	PDF	Superintendent
Q06	Quality Audit Reports	10.5	As conducted	PDF	Principal
Off-Site Fabrication Deliverables					
Ref	Deliverable	SOW Clause(s)	Timing	Format	Review / Acceptance
OF01	Off-Site Fabrication QA Plan	3.4; 10.0	Prior to fabrication	PDF	Superintendent

OF02	Fabrication ITPs & Records	3.4; 10.2	Progressive	PDF	Superintendent
OF03	Material Traceability Records	10.2; 10.6	Progressive	PDF	Superintendent
OF04	Factory Acceptance Test (FAT) Reports	3.12; 10.6	Prior to dispatch	PDF	Superintendent
OF05	Transport & Handling Plan	3.5	Prior to dispatch	PDF	Superintendent
Testing & Commissioning Deliverables					
Ref	Deliverable	SOW Clause(s)	Timing	Format	Review / Acceptance
C01	Commissioning Plan	3.12	Prior to commissioning	PDF	Superintendent
C02	Pre-Commissioning Checklists	3.12	Prior to testing	PDF	Superintendent
C03	System Test Reports (All Services)	3.12; 10.0	Progressive	PDF	Superintendent
C04	Integrated Systems Test Reports	3.12	Prior to PC	PDF	Superintendent
C05	Fire Systems Test & Certifications	3.12; 7.4; Authority requirements	Prior to PC	PDF	Authority / Superintendent
C06	Commissioning Records (Full Set)	3.12; 7.4	Progressive	PDF	Superintendent
Handover & Close-Out Deliverables					
Ref	Deliverable	SOW Clause(s)	Timing	Format	Review / Acceptance
H01	Operations & Maintenance Manuals	7.4.3; 3.13	Prior to PC	PDF + Native	Superintendent
H02	Asset Registers (Services & Equipment)	3.13; 7.3	Prior to PC	Excel	Principal
H03	Warranties & Guarantees	3.13	Prior to PC	PDF	Superintendent
H04	Training Materials & Attendance Records	3.13	Prior to PC	PDF	Principal
H05	Final Manufacturer's Data Report (MDR)	10.6; 7.4	Prior to PC	PDF	Superintendent
H06	Defects / Punch List Closure Evidence	3.13; DLP obligations	Prior to Final Cert	PDF	Superintendent

Where the Contractor does not provide the above, the Contractor must generate written or other information to the Principal indicating what the Contractor must do, what the Contractor has done, or what needs to be done to meet these requirements.

16.0 Appendix C – Works included and excluded matrix

16.1 New Office Building – Inclusions vs Exclusions

Category	Works Included	Works Excluded
Building Works	Complete construction of new office building including structure, envelope, internal fit-out and finishes	Future expansion works or additional floors not shown on Contract Drawings
Site & External Works	Site preparation, foundations, slabs, external services connections, external finishes as documented	Landscaping beyond areas expressly shown
Building Services	Complete mechanical, electrical, hydraulic, fire and communications services	ICT systems beyond containment, power and data cabling (e.g. servers, switches, software)
Security	Base-building security provisions shown on drawings	Security monitoring, access control programming, security staffing
Furniture & Equipment	Fixed joinery and built-in furniture	Loose furniture, personal effects and relocations
Interfaces	All interfaces required to integrate the building with adjacent services and infrastructure	Works to adjacent buildings except where expressly shown

16.2 Registry Building – Inclusions vs Exclusions

Category	Works Included	Works Excluded
Demolition	Demolition and strip-out of nominated areas	Demolition outside the nominated refurbishment footprint
Building Fabric	Structural alterations, partitions, ceilings, finishes and fabric reinstatement within scope areas	Upgrades to retained areas not impacted by the Works
Building Services	Modification, relocation and upgrade of services within refurbished areas	Whole-of-building services upgrades not expressly documented
Operational Continuity	Staged works to support continued occupation where required	Staff decanting, temporary accommodation or relocation management
Records & Assets	Protection of existing assets during construction	Relocation, cataloguing or management of records, archives or sensitive materials
Latent Conditions	Works shown on drawings and specifications	Remediation of undocumented structural defects or hazardous materials

16.3 Workshop Building – Inclusions vs Exclusions

Category	Works Included	Works Excluded
Demolition	Removal of existing amenities, partitions and redundant services	Demolition of operational workshop plant or equipment
Building Works	New amenities, internal reconfiguration, finishes and fabric works	Upgrades to retained workshop areas not affected by the Works
Building Services	Amenities services, drainage, ventilation and electrical upgrades	Upgrades to workshop process services not documented
External Works	External fabric works shown on drawings	Modifications to hardstand, yards or roads outside battery limits
Equipment	Builder-supplied fixtures and fittings	Specialist workshop plant, tools and machinery
Operations	Staged delivery to maintain access and safety	Extended shutdowns beyond those expressly stated

16.4 Warehouse Building – Inclusions vs Exclusions

Category	Works Included	Works Excluded
Demolition	Strip-out of nominated office and amenities areas	Demolition to warehouse operational areas not shown
Building Fabric	Office fit-out works, partitions, ceilings, finishes	Structural upgrades beyond documented scope
Building Services	Office services, fire systems and services upgrades within scope	Whole-of-warehouse services upgrades
External Works	Envelope repairs, glazing and repainting works shown	External works beyond defined refurbishment areas
Storage & Operations	Protection of retained warehouse operations	Warehouse racking, storage systems and loose equipment
Goods & Inventory	Coordination around stored goods	Relocation, handling or reinstatement of inventory

17.0 Appendix D – HSE-PROC-18-Principal Contractor



stanwell

BUSINESS PROCEDURE

Principal Contractor HSE Requirements HSE-PROC-18



This document applies to:

All Sites



WRITTEN BY: Jayde Smith

ENDORSED/CHECKED BY: Carl Rothman

APPROVED BY: Kriss Ussher

Doc No: HSE-PROC-18

Revision No: 0

Revision Date: 21.08.2024

Page: 1 of 24

THIS DOCUMENT IS UNCONTROLLED IN HARD COPY FORMAT

Table of Contents

1.0	Purpose/Scope	4
2.0	Legislative Requirements	4
3.0	Project HSE Management Plans	4
3.1	HSE Management System	4
3.2	WHS Management Plan	4
3.3	Environmental Management Plan	5
3.4	Management Plan Review	5
4.0	Site Mobilisation.....	5
5.0	Risk Management.....	5
5.1	Risk Appetite	5
5.2	General Risk Management Requirements	7
5.3	Risk Register	7
5.4	Risk Assessment.....	7
5.5	Permit to Work	7
5.6	Electrical Safety	8
5.7	Management of Change.....	Error! Bookmark not defined.
5.8	Safety in Design.....	8
6.0	Leadership and Commitment.....	8
7.0	Induction, Training and Competency	9
7.1	Induction.....	9
7.2	Training and Competency	9
8.0	Subcontractor Management.....	10
9.0	Communication and Consultation.....	10
9.1	Consultation, Cooperation and Coordination	10
9.2	Communication	10
10.0	Facilities and Amenities	10
11.0	Site Security and Access	11
12.0	Health and Wellbeing.....	11
12.1	Health Risk Assessment, Pre-Employment Medicals and Health Monitoring	11
12.2	Fitness for Work.....	11
12.2.1	Alcohol and Other Drugs	11
12.2.2	Fatigue Management	11
12.3	Psychosocial Safety	11
12.4	Rehabilitation and Return to Work	12

13.0	Personal Protective Equipment.....	12
14.0	Incident Reporting and Investigation	12
14.1	Incident Reporting	12
14.2	External Regulator Notification	13
14.3	Investigation	13
15.0	Emergency Management	13
15.1	Emergency Management Plan	13
15.2	First Aid.....	14
16.0	Environmental Management.....	14
16.1	Environmental and Planning Approvals.....	14
16.2	Environmental Authority.....	14
16.3	Land and Vegetation Disturbance	14
16.4	Species Management Program.....	15
16.5	Emissions Reporting.....	15
16.6	Waste Reporting	15
16.7	Sustainability	15
16.8	Cultural Heritage	15
17.0	HSE Performance Reporting.....	16
18.0	Stanwell Governance and Assurance.....	18
19.0	Corrective Action Management	18
20.0	Site Handover.....	19
21.0	Document and Records Management.....	19
22.0	Responsibilities.....	19
22.1	Project Teams	19
22.2	Health, Safety and Environment Team	19
22.3	Principal Contractors	19
23.0	Review, Consultation and Communication.....	19
24.0	References.....	20
25.0	Definitions.....	21
26.0	Revision History	24

1.0 Purpose/Scope

This Business Procedure describes the minimum Health, Safety and Environment (HSE) requirements for a Principal Contractor (PC) engaged by Stanwell Corporation Limited (Stanwell) for a Construction Project.

This Business Procedure applies to all PCs appointed by Stanwell under the Work Health and Safety (WHS) legislation. The Business Procedure must be used by Principal Contractors to support the contractual arrangements to meet Stanwell's HSE requirements.

2.0 Legislative Requirements

The PC must comply with duties as a PC under the *QLD Work Health and Safety Regulation 2011*, which include but are not limited to:

- installation of signage identifying the PC;
- preparation of a Workplace Health and Safety (WHS) Management Plan, before work on the project commences;
- informing all persons of the WHS Management Plan before they commence;
- reviewing the WHS Management Plan and ensuring that each person carrying out construction work is made aware of any revision;
- obtaining copies of Safe Work Method Statements (SWMS) relating to high-risk construction work before the high-risk construction work commences;
- implementing arrangements for ensuring compliance with specified requirements such as facilities and amenities; and
- managing risks associated with construction materials and waste, plant, traffic, and essential services.

The PC must also comply with environmental legislative requirements, as outlined within Section 16 of this Business Procedure.

3.0 Project HSE Management Plans

3.1 HSE Management System

The PC must have, or must develop, a robust HSE management system which complies with the HSE legislation and aligns with *AS/NZS ISO 45001:2018 Occupational Health and Safety Management Systems* and *AS/NZS ISO 14001:2016 Environmental Management Systems*.

3.2 WHS Management Plan

The PC must develop and provide a WHS Management Plan for the project that complies with the *Qld Work Health and Safety Regulation 2011* and demonstrates how the PC will manage project specific health and safety risks.

In developing the WHS Management Plan, the PC must consider the requirements of:

- Acts and Regulations relevant to the scope of work;
- codes of practice, guides, and Australian Standards relevant to the scope of work;
- contractual requirements outlined in the Contract with Stanwell; and
- other requirements outlined within this Business Procedure.

The WHS Management Plan must refer to other related topic specific management plans, such as Traffic Management, Emergency Management, Interface Management, etc.

3.3 Environmental Management Plan

The PC must develop and provide a project specific Construction Environmental Management Plan (CEMP) (or combined HSE Management Plan) based on the requirements of the scope of work, inherent environmental risks and other requirements outlined within this Business Procedure.

In developing the CEMP, the PC must consider the requirements of:

- Acts and Regulations relevant to the scope of work;
- codes, policies, guidelines, and Australian Standards relevant to the scope of work;
- environmental approval obligations (i.e. Environmental Authorities, Species Management Programs, Permits);
- contractual requirements outlined in the Contract with Stanwell; and
- other requirements outlined within this Business Procedure.

The CEMP must refer to other related aspect specific sub-management plans, such as Erosion and Sediment Control, Water Quality Management, Air Quality Management, Noise and Vibration Management, Biosecurity and Weed Management, Waste Management, etc.

3.4 Management Plan Review

The PC Management Plans and supporting documentation must be submitted to Stanwell for review prior to mobilisation to site.

The PC must also review and revise the Management Plans to ensure that they remain up to date throughout the project. The PC must ensure that each person carrying out construction work in connection with the project is made aware of any revision to the Management Plans.

4.0 Site Mobilisation

Prior to mobilisation to site the PC must provide all required HSE documentation as required by the Contract, Scope of Work, this Business Procedure and as outlined within the *Stanwell Mobilisation Readiness Checklist (T-3913)*.

The PC must also participate in a 'Project Kick Off Meeting' which must include health, safety and environment as an agenda item.

Following receipt and review of mobilisation deliverables from the PC, Stanwell will issue a *Notice giving Possession of Site (CM 15/72971)* for the Project Site/ Licenced Construction Area (LCA).

5.0 Risk Management

5.1 Risk Appetite

In undertaking the project, the PC should consider Stanwell's risk appetite for HSE risks as per the *Stanwell Risk Appetite Statement (GOV-POL-38)*, this includes:

Risk Category	Sub-Risk Category	Risk Appetite Statement
Health & Safety	Health & Safety Management	Stanwell cares for the health, safety and wellbeing of its people. Stanwell has no appetite for events / circumstances that cause serious injury or fatality, or serious negative impact to the health and wellbeing of our people.
	Regulatory Compliance	Stanwell is committed to complying with applicable health and safety regulatory requirements. Stanwell has no appetite for incidences of: • material breaches of health and safety regulations; • repeat breaches of health and safety regulations; or • intentional breaches of health and safety regulations, or Stanwell's policies or practices.
Environmental	Neighbour Impact	Stanwell has a conservative appetite for managing our asset's impacts on neighbours; we comply with Environmental Authority conditions, and wherever possible, avoid negatively impacting neighbours, while ensuring any commercial cost is reasonable.
	Environmental Management	Stanwell is committed to managing environmental risks and complying with legal and other relevant environmental requirements. Stanwell has no appetite for incidences of: • material breaches of environmental regulations or environmental authority conditions; • repeat breaches of environmental regulations or environmental authority conditions (except those related to administrative or sampling errors with no environmental harm, have no impact to risk profile and are not seen as significant by the regulating authority); or • intentional breaches of environmental regulations or environmental authority conditions.
	Rehabilitation	Stanwell has no appetite for not completing effective rehabilitation activities in a timely manner.

5.2 General Risk Management Requirements

The PC must develop and implement risk management processes to identify project specific HSE hazards, assess risks and control and communicate those risks and control measures.

The PC must eliminate HSE risks so far as is reasonably practicable, and if not reasonably practicable to eliminate HSE risks, utilise the hierarchy of controls to minimise those risks so far as is reasonably practicable.

Risks must be assessed using a risk assessment matrix that includes likelihood and consequence criteria. The risk assessment matrix must be provided to Stanwell for review prior to risk assessments being conducted.

5.3 Risk Register

The PC must undertake a Project HSE Risk Assessment and maintain a Project HSE Risk Register (Risk Register). The Risk Register must be provided to Stanwell prior to the commencement of construction.

The Risk Register must identify all HSE risks associated with the works and identify mitigations in place to eliminate or reduce risks through the application of the hierarchy of controls.

The Risk Register must be maintained and regularly reviewed, by the PC to ensure that it remains current until such time that the project has been handed over successfully. The PC must provide Stanwell with records of any changes to the Risk Register, as soon as practicable.

5.4 Risk Assessment

The PC must ensure that risk assessments are prepared for activities undertaken on site. The PC must determine the most appropriate risk assessment tool, depending on the nature of the works, in accordance with their risk management procedures.

Safe Work Method Statements (SWMS) must be prepared for high-risk construction work activities in accordance with the *Old Work Health and Safety Regulation 2011*. The PC must establish and include within the WHS Management Plan, arrangements for the collection and any assessment, monitoring, and review of SWMS.

5.5 Permit to Work

The PC must establish and implement adequate work procedures and processes relevant to the project scope of work.

The PC should identify and consider relevant work activities that require a permit, such as:

- hot work;
- electrical work;
- isolations;
- confined space work;
- work at height;
- demolition;
- asbestos removal;
- excavation / land and vegetation disturbance work; and
- diving operations.

The PC must provide a copy of their permit to work procedures to Stanwell before undertaking any relevant work activities.

5.6 Electrical Safety

The PC must ensure risks associated with electrical installations and work are identified and managed. Processes must be developed in accordance with relevant legislation, including but not limited to:

- *Qld Electrical Safety Act 2002;*
- *Qld Electrical Safety Regulation 2013;*
- *Qld Managing Electrical Risks in the Workplace Code of Practice 2021;*
- *Qld Electrical Safety Code of Practice 2020 – Works;*
- *Qld Working Near Overhead and Underground Electric Lines Code of Practice 2020; and*
- *AS/NZS 3012:2019 Electrical Installations – Construction and Demolition Sites.*

5.7 Safety in Design

The PC must implement Safety in Design processes and integrate control measures early in the design process to eliminate or, if this is not reasonably practicable, minimise risks to health, safety and the environment.

When designing structures, the PC must undertake Safety in Design activities in accordance with the *Qld Work Health and Safety Regulation 2011* and *Qld Safe Design of Structures Code of Practice 2021*.

The PC must also consider the requirements of the environmental legislation, including but not limited to:

- *Qld Environmental Protection Act 1994;*
- *Qld Environmental Protection Regulation 2019;*
- *Qld Environmental Protection (Air) Policy 2019;*
- *Qld Environmental Protection (Noise) Policy 2019;*
- *Qld Environmental Protection (Water and Wetland Biodiversity) Policy 2019; and*
- Environmental Authority, where applicable.

Risk workshops including Safety in Design (SiD), Hazard identification (HAZID) and Hazard and Operability (HAZOP) must be undertaken, with consideration to the following requirements:

- facilitation by appropriately qualified and experienced professionals;
- attendance by relevant personnel, including but not limited to, designers, engineers, construction workers, health and safety and environmental professionals;
- invitations for attendance extended to representatives from Stanwell; and
- provision of supporting documentation for review prior to the workshop.

The PC must provide written Safety in Design reports to Stanwell that specify the hazards relating to the design.

6.0 Leadership and Commitment

The PC should demonstrate effective leadership and commitment to managing HSE for the project. The PC's leadership team management must:

- take overall responsibility and accountability for the prevention of work-related injury and ill health;
- ensure a HSE Policy and related HSE objectives and targets are established and are compatible with the project;

- ensure the integration of the PC's HSE management system requirements into the project's processes;
- ensure adequate HSE resources (including people, facilities, and equipment) are provided and available in accordance with the Contract;
- ensure and promote continual HSE improvement;
- support reporting of incidents, hazards, risks, and opportunities; and
- establish and implement processes for consultation and participation of workers.

The PC should consider establishing a Field Leadership Program to improve HSE outcomes through visible and engaged leaders. The Field Leadership Program should be designed primarily for leaders with operational accountabilities to engage with their teams on HSE in the field through activities, such as:

- HSE observations / interactions;
- critical control verifications; and
- inspections / audits.

The Field Leadership Program is to be documented within the WHS Management Plan, or another readily available document.

7.0 Induction, Training and Competency

7.1 Induction

The PC must establish and implement an induction program which provides information about the HSE risks and work practices specific to the project, some items to consider include:

- hazards and control measures relevant to the site;
- project specific HSE documents, policies, and plans;
- supervisory, consultation, issue resolution and reporting arrangements;
- site HSE rules;
- workplace facilities, including their location, use and maintenance;
- first aid provisions and emergency procedures, including after-hours emergency contacts;
- health monitoring requirements and procedures;
- location of underground / overhead services; and
- access, egress and security.

Relevant content relating to Stanwell specific requirements must be included in the PC Induction.

The PC may also be required to participate in Stanwell induction processes. This may include participation in online and/or face to face training. These requirements are to be confirmed and agreed prior to mobilisation.

The PC must also ensure that any person who is to carry out construction work has completed General Construction Induction Training in accordance with the *Qld Work Health and Safety Regulation 2011*.

7.2 Training and Competency

The PC must establish and implement training and competency processes for the project, including but not limited to:

- undertake a Training Needs Analysis and determine the required HSE training and competency requirements for personnel undertaking work on the project;
- provide training as required by applicable laws and standards;

- ensure that all workers hold and have proof of a high-risk work licence or competency applicable to the work being undertaken out on site;
- develop and implement a Verification of Competency (VOC) process (or similar) for high-risk work licences and mobile plant operation; and
- maintain a Training Register (or similar) of training and competency qualifications for project personnel.

8.0 Subcontractor Management

The PC must establish processes for the management of subcontractors working on the project. This should include consideration to selection, onboarding / induction, monitoring arrangements and actions that will be implemented if the subcontractor is not complying with legislative requirements or the requirements of the HSE Management Plan.

Depending on the locality of the project, subcontractors may also be required to participate in Stanwell Induction processes. This may include participation in online and/or face to face training. These requirements are to be confirmed and agreed prior to mobilisation.

The PC must document subcontractor management processes within the WHS Management Plan for the project.

9.0 Communication and Consultation

9.1 Consultation, Cooperation and Coordination

The PC must develop and implement consultation, cooperation, and coordination processes that comply with consultation requirements under the *Qld Work Health and Safety Act 2011*, *Qld Work Health and Safety Act 2011* and *Qld Work Health and Safety Consultation, Cooperation and Coordination Code of Practice 2021*.

The PC must document consultation, cooperation, and coordination processes within the WHS Management Plan for the project.

9.2 Communication

The PC must establish processes for the distribution and communication of HSE information relating to the project, for example:

- inductions;
- pre-start meetings;
- toolbox talks;
- health and safety committee meetings;
- HSE Alerts, lessons learnt and bulletins; and
- noticeboards.

The PC should consider diversity aspects (e.g. gender, language, culture, literacy, disability) when determining communication methods.

The PC must share relevant HSE communications, such as HSE Alerts and industry learnings, with Stanwell.

10.0 Facilities and Amenities

The PC must provide and maintain adequate and accessible facilities in accordance with the *Qld Work Health and Safety Regulation 2011* and *Q Managing the Work Environment and Facilities Code of Practice 2021*, including but not limited to:

- drinking water;

- toilets;
- hand and face washing facilities; and
- dining facilities.

The PC must ensure that workers, including those who have particular needs or disabilities, have access to the facilities. All amenities are to be maintained in a hygienic, safe, and serviceable condition.

11.0 Site Security and Access

The PC must establish and implement processes to ensure that the project site is secured from authorised access, with consideration to:

- access authorisation processes;
- fencing;
- barricading and signage; and
- security monitoring.

12.0 Health and Wellbeing

12.1 Health Risk Assessment, Pre-Employment Medicals and Health Monitoring

The PC must manage any occupational health risks applicable to the project.

This may include the development of a Health Risk Assessment and establishment of processes for pre-employment medical assessments, occupational hygiene monitoring and periodic health monitoring, as determined to be relevant, in accordance with the *QLD Work Health and Safety Regulation 2011*.

12.2 Fitness for Work

The PC must ensure all workers, contractors and visitors attend site fit for duty and must have a fitness for work process that includes alcohol and other drugs management, and fatigue management.

12.2.1 Alcohol and Other Drugs

The PC must establish and implement procedures for the management of alcohol and other drugs. This may include the implementation of an alcohol and other drug testing regime.

12.2.2 Fatigue Management

The PC must have procedures and systems that demonstrate how it will manage fatigue in accordance with:

- *Qld Work Health and Safety Act 2011*;
- *Qld Work Health and Safety Regulation 2011*;
- *Heavy Vehicle National Law*;
- *Workplace Health and Safety Queensland – Preventing and Managing Fatigue Related Risk in the Workplace 2020*; and
- *Safe Work Australia – Guide for Managing the Risk of Fatigue at Work 2013*.

12.3 Psychosocial Safety

The PC must develop and implement processes for managing risks to workers' psychosocial health that may result from psychosocial hazards in accordance with the *Qld Managing the Risk of Psychosocial Hazards at Work Code of Practice 2022*.

The PC should consider undertaking a project specific Psychosocial Risk Assessment to identify appropriate control measures for managing the risk of relevant psychosocial hazards. The Psychosocial Risk Assessment should be reviewed regularly to ensure that it is up to date and captures changing or emerging risks in this space as the project progresses.

The PC should also ensure workers are aware of the wellbeing services available to them.

12.4 Rehabilitation and Return to Work

The PC must establish and implement rehabilitation and return to work processes in accordance with the:

- *Qld Workers Compensation and Rehabilitation Act 2003*; and
- *Qld Workers Compensation and Rehabilitation Regulation 2014*.

13.0 Personal Protective Equipment

The PC must determine Personal Protective Equipment (PPE) requirements for the project and enable the provision of PPE to workers in accordance with the *Qld Work Health and Safety Regulation 2011*.

The PC must provide workers with information, training, and instruction in the proper use, wearing, storage and maintenance of PPE.

Other persons, including visitors, to the project site must also be provided with PPE.

Where respiratory protective equipment (RPE) is required to control respiratory hazards, the PC must establish a RPE program including selection, fit testing, training, use and maintenance in accordance with *AS/NZS 1715:2009 – Selection, Use and Maintenance of Respiratory Protective Equipment*.

14.0 Incident Reporting and Investigation

The PC must establish and implement incident reporting and investigation procedures and incorporate the below requirements into their respective Management Plans.

14.1 Incident Reporting

The PC must notify Stanwell of any relevant HSE incidents immediately. These include, but are not limited to:

- incidents involving the death or serious injury or illness of its employees or those of its subcontractors;
- dangerous incidents or near miss events;
- dangerous or serious electrical incidents;
- high potential Incidents;
- worker exposure or potential exposure incidents;
- environmental incidents (e.g. spills, fauna injury/deaths, over-clearing etc.);
- notifiable incidents; and
- community complaints.

The PC must provide the following information with any incident notification to Stanwell:

- date, time and location of incident;
- description of events and actual/potential consequences;
- who was involved; and
- actions taken.

14.2 External Regulator Notification

In the event of a notifiable incident, the PC must notify the relevant regulatory authority (e.g. *Workplace Health and Safety Queensland (WHSQ)*, *Electrical Safety Office (ESO)*, *Department of Environment, Science and Innovation (DESI)*) in accordance with statutory timeframes. The PC must verbally notify Stanwell as soon as is reasonably practicable and provide a copy of the notification on the day that it is submitted.

The PC must provide Stanwell with a copy of any further Regulator correspondence in relation to the incident, including notices, infringements, penalties, etc. The PC must also provide evidence that the incident has been closed with the relevant Regulator.

If the notifiable incident relates to an environmental authority / approval / permit held by Stanwell, the PC must notify Stanwell who will undertake the notification to the relevant Regulator.

14.3 Investigation

The PC must undertake incident investigations in accordance with their investigation procedures and Management Plans.

The PC must provide a draft investigation in writing to Stanwell for review within seven days of the incident. The investigation must be finalised and closed out within 30 days of the incident. This timeline may change depending on the severity of the incident however will require approval from Stanwell.

Stanwell may conduct its own investigation into any incident and the PC must cooperate fully by providing prompt information about the incident and access to relevant documents and the PC's personnel.

15.0 Emergency Management

15.1 Emergency Management Plan

The PC must establish and implement an Emergency Management Plan for the project.

In developing the Emergency Management Plan, the PC must consider:

- the types of emergencies most likely to arise from their activities;
- identifying who must be contacted and notified in an emergency;
- evacuation locations;
- provision of emergency information to workers; and
- any necessary procedures for rescuing persons.

The Emergency Management Plan must include the following:

- an effective response to an emergency;
- evacuation procedures;
- identify key personnel with specific roles and responsibilities in emergency situations;
- notifying emergency service organisation and other relevant stakeholders at the earliest opportunity;
- medical treatment and assistance; and
- effective communication between the person authorised to coordinate the emergency response and persons at the workplace.

Where undertaking a project at a Stanwell generating site, the PC must also consider the Stanwell Emergency Management Plan and evacuation locations.

The PC must establish processes and a frequency for testing emergency procedures, including liaison with emergency services and other stakeholders, as appropriate. Learnings from

emergency drills, exercises and incidents must be documented, incorporated into revisions of the Emergency Response Plan and shared with workers and other relevant stakeholders.

The PC must also provide workers with information, training and instruction about implementing the Emergency Management Plan, including display of evacuation procedures on site.

15.2 First Aid

The PC must develop and implement processes for managing first aid for the project in accordance with the *Qld Work Health and Safety Regulation 2011* and *Qld First Aid in the Workplace Code of Practice 2021*.

16.0 Environmental Management

16.1 Environmental and Planning Approvals

The PC must establish and implement processes to ensure that the project is conducted in accordance with the relevant environmental and planning approvals, required by legislation, such as, but not limited to:

- *Environmental Protection and Biodiversity Conservation Act 1999;*
- *Qld Environmental Protection Act 1994 and Regulation 2019;*
- *Qld Vegetation Management Act 1999;*
- *Qld Nature Conservation Act 1992 and Regulations;*
- *Qld Aboriginal Cultural Heritage Act 2003;*
- *Qld Planning Act 2016 and Regulation 2017;*
- *Qld Land Act 1994;*
- *Qld Water Act 2000;*
- *Qld Fisheries Act 1994;*
- Development Codes, Development Approval;
- Local Laws; and
- Environmental Authority, where applicable.

The PC must ensure that all subcontractors and other applicable stakeholders have access to approval documentation.

The PC must ensure that the project CEMP outlines management and mitigation measures that will be implemented to ensure compliance with project's environmental and planning approvals and regulatory requirements.

16.2 Environmental Authority

The PC must ensure that the project is undertaken in accordance with the requirements of the Environmental Authority for the site, where applicable.

When undertaking projects at Stanwell generating sites with an existing Environmental Authority, the PC must review and comply with the *Stanwell Environmental Authority – Project Compliance Checklist (ENV-WI-20)* throughout all project phases.

16.3 Land and Vegetation Disturbance

The PC must establish and implement processes to ensure land and vegetation disturbance is managed in accordance with all environmental legislative requirements.

The PC must comply with the requirements of the *Stanwell Business Procedure: Land & Vegetation Disturbance (ENV-PROC-39)*, where relevant to the project.

All activities that classify as land and/or vegetation disturbance must have an approved *Stanwell Land and Vegetation Disturbance Permit (LVDP) (T-1985)* prior to the commencement. A LVDP request is required to be submitted a minimum of 10 working days prior to disturbance activities being undertaken.

The PC must ensure that all workers review and sign onto the LVDP and comply with any conditions and controls for land and vegetation disturbance.

The PC must also implement processes to ensure compliance with specific landowner access arrangements and requirements.

16.4 Species Management Program

A Species Management Program (SMP) is required where an animal breeding place, as defined under Section 335 of the *Qld Nature Conservation (Animals) Regulation 2020*, has been identified and activities are proposed that would tamper with the breeding place.

The PC must ensure that the project is undertaken in accordance with the requirements of the approved SMP for the project site, where applicable.

16.5 Emissions Reporting

The PC must establish and implement processes for emissions reporting as required by the *National Greenhouse and Energy Reporting Act 2007* and *Qld Environmental Protection Regulation 2019*. Where Stanwell has operational control of the project site location, the PC will be required to collect emissions data in line with the *National Greenhouse and Stanwell Energy Reporting System - Contractor Reporting Form (T-1779)* and provide to Stanwell to fulfil reporting obligations.

16.6 Waste Reporting

The PC must establish and implement processes for waste reporting and regulated waste tracking as required by the *Qld Waste Reduction and Recycling Act 2011* and *Qld Environmental Protection Regulation 2019*.

16.7 Sustainability

The PC should consider, where applicable, opportunities and contributions to the achievement of Stanwell's Sustainability Commitments throughout the lifecycle of the contract, including design and construction phases.

Stanwell's Sustainability Commitments include:

- reduce portfolio emissions and help ensure security of energy supply;
- safeguard the flora and fauna, land, and waterways around our sites;
- work with suppliers who help achieve our sustainability commitments;
- create transformative economic and social opportunity for our host communities as well as First Nations people; and
- ensure our people realise opportunities from the energy transition; and
- ensure our workplace is safe, inclusive, and diverse.

16.8 Cultural Heritage

The PC must ensure all project works are undertaken in accordance with relevant legislation including the *Aboriginal Cultural Heritage Act 2003*, *Qld Heritage Act 1992*, and *Torres Strait Islander Cultural Heritage Act 2003*.

A Cultural Heritage Management Plan (CHMP) must be in place or prepared and approved, prior to commencement of any ground disturbance works.

The PC must ensure that construction activities are managed to maintain cultural heritage values of sites, place, and values within and adjacent to the project site. If during any activities

undertaken at the project site an item or object of potential Cultural Heritage significance is discovered, work shall cease immediately, an exclusion zone established, and the finding reported to Stanwell.

17.0 HSE Performance Reporting

The PC must establish HSE objectives and targets for the project, including a mix of 'leading' and 'lagging' indicators, including but not limited to:

Leading Metrics	Target	Measure
Critical Control Verifications (CCVs)	100% PC to advise number of CCVs planned per month.	% of CCVs performed against planned (target) during the reporting period.
Leadership site visits / interactions	100% PC to advise monthly target.	% of leadership site visits performed against planned (target) during the reporting period.
HSE Corrective Action Completion	Actions to be closed in agreed timeframe.	% HSE Corrective Actions completed (for closed event investigations and/or HSE Audit Reports)
Lagging Metrics	Target	Measure
The number of Serious Injury &/or Fatality (SIF) (Actual Impact) events	0	The number of Serious Injury &/or Fatality (SIF) (Actual Impact) events against target. Further information required – refer below.
The number of Serious Injury &/or Fatality (SIF) (Potential Impact) events	0	The number of Serious Injury &/or Fatality (SIF) (Potential Impact) events against target. Further information required – refer below.
The number of Events Notifiable to a Regulator (HS and E)	0	The number of Events Notifiable to a Regulator (HS and E) against target. Further information required – refer below.
Health, Safety and Environmental Enforcement Actions (Moderate Level 3 Compliance/Legal impact) or greater.	0	The number of HSE Enforcement Actions (Moderate Level 3 or greater Compliance / Legal) against target. Further information required – refer below.
Number of First Aid Injuries	N/A	Report number of first aid injuries.
Number of Medical Treatment Injuries	N/A	Report number of Medical Treatment Injuries. Further information required – refer below.
Number of Lost Time Injuries	N/A	Report number of Lost Time Injuries. Further information required – refer below.
Number of Regulatory Notices Received	N/A	Report number of Regulatory Notices Received. Further information required – refer below.

For applicable events (as indicated in the above table), the PC must provide the following HSE reporting information to Stanwell on a monthly basis (emailed by close of business by the second working day of the month):

- Notifiable Incidents: provide the following details for all health, safety and environmental notifiable incidents (e. g. where environmental harm has occurred, or might occur; and/or breaches to the conditions of an Environmental Authority (EA) (where applicable) that were reported to a Regulator during the reporting period (or should have been reported in accordance with WHS, Electrical Safety or Environmental laws):
 - notifiable incident classification under the applicable law (e.g., WHS Act, Electrical Safety Act, Environmental Protection Act);
 - event description;
 - immediate actions taken;
 - investigation findings;
 - corrective actions; and
 - lessons learned and how these have been or will be incorporated into the Contractor's operational policies and procedures.
- Work-related fatalities and injuries:
 - Lost Time Injuries (LTI) – Provide number of LTI events for the reporting period; and event summary, investigation findings and corrective actions (where applicable);
 - Medical Treatment Injuries (MTI) – Provide number of MTI events for the reporting period; and event summary, investigation findings and corrective actions (where applicable); and
 - First Aid Injuries (FAI) – Provide number of FAI events for the reporting period.
- HSE Enforcement Actions and HSE Regulatory Notices received:
 - provide details of HSE Enforcement Actions and/or HSE Regulatory Notice received from a Regulator during the reporting period. Such information should include clear explanation of the contravention and details of any fines and/or corrective action taken.

18.0 Stanwell Governance and Assurance

Stanwell will undertake monitoring and assurance review activities throughout all phases of the project. The PC will be required to make available any copies of HSE documentation considered relevant to providing Stanwell with assurance that HSE is being managed satisfactorily and in line with legislative requirements.

Stanwell will undertake targeted HSE audits against the project Management Plans and relevant legislation to determine performance and compliance. The PC must make all relevant HSE records including those of subcontractors and suppliers available upon request and provide reasonable assistance during the audits.

19.0 Corrective Action Management

The PC must establish and implement processes for the management of corrective and preventive actions, resulting from activities such as:

- audits;
- inspections;
- observations / interactions;
- risk assessments; and
- incident Investigations.

The PC must maintain a Corrective Action Register (or similar) and identify a time frame for closure, nominated person responsible for implementing and monitoring the action and monitoring for the effectiveness of controls.

The PC must provide corrective action plans and evidence to Stanwell of closure, where requested.

20.0 Site Handover

At the completion of the project, the PC must provide all required HSE documentation and deliverables as required by the Contract, Scope of Work, this Business Procedure and as outlined within the *Stanwell Project Site Handover – HSE Documentation Checklist (T-3904)*.

21.0 Document and Records Management

The PC must establish and implement processes for the creation, review, approval, dissemination, retention and disposal of documents and records in accordance with relevant legislative requirements. The PC must provide records to Stanwell upon request.

22.0 Responsibilities

22.1 Project Teams

Stanwell Project Teams will be responsible for:

- providing this Business Procedure to Principal Contractors;
- obtaining relevant documentation and information required by this Business Procedure from Principal Contractors; and
- managing project and Principal Contractor compliance to this Business Procedure.

22.2 Health, Safety and Environment Team

The Health, Safety and Environment Team will be responsible for providing advice and support to Project Teams to implement the requirements of this Business Procedure, including:

- reviewing Principal Contractor documentation;
- participating in project risk management activities;
- issuing Land and Vegetation Disturbance Permits;
- facilitating HSE performance reporting;
- undertaking governance and assurance activities; and
- overseeing regulatory engagement and maintaining records.

22.3 Principal Contractors

Principal Contractors will be responsible for complying with all requirements of this Business Procedure.

23.0 Review, Consultation and Communication

Review:

This Document is required to be reviewed, as a minimum, every 5 years.

Consultation:

Consultation will occur in accordance with the *Stanwell Business Procedure: HSE Consultation and Participation (HSE-PROC-13)*.

Communication/Requirements after Update:

This Business Procedure will be communicated and available on the Stanwell Intranet and is to be made available to Principal Contractors via contractual documentation.

24.0 References

Legislation

- GOC State Archives – Public Records Act
- Qld Work Health and Safety Act 2011
- Qld Work Health and Safety Regulation 2011
- Qld Workers Compensation and Rehabilitation Act 2003
- Qld Workers Compensation and Rehabilitation 2014
- Heavy Vehicle National Law
- Qld Electrical Safety Act 2002
- Qld Electrical Safety Regulation 2013
- Qld Environmental Protection Act 1994
- Qld Environmental Protection Regulation 2019
- Qld Environmental Protection (Air) Policy 2019
- Qld Environmental Protection (Noise) Policy 2019
- Qld Environmental Protection (Water and Wetland Biodiversity) Policy 2019
- Environmental Protection and Biodiversity Conservation Act 1999
- Qld Aboriginal Cultural Heritage Act 2003
- Torres Strait Islander Cultural Heritage Act 2003
- Qld Planning Act 2016
- Qld Regulation 2017
- Qld Land Act 1994
- Qld Nature Conservation Act 1992
- Qld Nature Conservation (Animals) Regulation 2020
- Qld Fisheries Act 1994
- Qld Water Act 2000
- National Greenhouse and Energy Reporting Act 2007

Standards & Guidelines

- AS/NZS ISO 45001:2018 Occupational Health and Safety Management Systems
- AS/NZS ISO 14001:2016 Environmental Management Systems
- AS/NZS 1715:2009 – Selection, Use and Maintenance of Respiratory Protective Equipment
- Workplace Health and Safety Queensland – Preventing and Managing Fatigue Related Risk in the Workplace 2020

- Safe Work Australia – Guide for Managing the Risk of Fatigue at Work 2013
- AS/NZS 3012:2019 Electrical Installations – Construction and Demolition Sites

Business Procedures

Document No	Document Title
GOV-POL-38	Stanwell Risk Appetite Statement
GOV-STD-11	Stanwell's Risk Evaluation Matrix
ENV-PROC-39	Land & Vegetation Disturbance
HSE-PROC-13	HSE Consultation & Participation

Tools

T-3913	Mobilisation Readiness Checklist
ENV-WI-20	Environmental Authority – Project Compliance Checklist
T-1985	Land & Vegetation Disturbance Permit
T-3904	Project Site Handover – HSE Documentation Checklist

25.0 Definitions

Word / Abbreviation	Definition
Construction Project	Same meaning as the QLD Work Health and Safety Regulation 2011, Section 292. A project that involves construction work where the cost of the construction work is \$250,000 or more.
Construction Work	Same meaning as the QLD Work Health and Safety Regulation 2011, Section 289. Any work carried out in connection with the construction, alteration, conversion, fitting-out, commissioning, renovation, repair, maintenance, refurbishment, demolition, decommissioning or dismantling of a structure.
Critical Controls	A highly relied upon control that is crucial to preventing the occurrence of an unwanted event or mitigating the consequences of the unwanted event if it did occur. The absence or failure of a critical control would significantly increase the risk of environmental harm, serious injury or fatality (SIF) despite the existence of the other controls.
Critical Control Verification	Critical Control Verification (CCV) is a systematic and proactive approach to auditing and identifying critical controls that are potential precursors to SIF exposure.
Hazard	A situation or thing that has the potential to harm a person.

High Risk Construction Work	Construction work that: a) involves a risk of a person falling more than 2m; or b) is carried out on a telecommunication tower; or c) involves demolition of an element of a structure that is load-bearing or otherwise related to the physical integrity of the structure; or d) involves, or is likely to involve, the disturbance of asbestos; or e) involves structural alterations or repairs that require temporary support to prevent collapse; or f) is carried out in or near a confined space; or g) is carried out in or near— (i) a shaft or trench with an excavated depth greater than 1.5m; or (ii) a tunnel; or h) involves the use of explosives; or i) is carried out on or near pressurised gas distribution mains or piping; or j) is carried out on or near chemical, fuel or refrigerant lines; or k) is carried out on or near energised electrical installations or services; or l) is carried out in an area that may have a contaminated or flammable atmosphere; or m) involves tilt-up or precast concrete; or n) is carried out on, in or adjacent to a road, railway, shipping lane or other traffic corridor that is in use by traffic other than pedestrians; or o) is carried out in an area at a workplace in which there is any movement of powered mobile plant; or p) is carried out in an area in which there are artificial extremes of temperature; or q) is carried out in or near water or other liquid that involves a risk of drowning; or r) involves diving work.
HSE Corrective Action Completion	The percent of HSE Corrective Actions completed (for closed HSE event investigations and/or HSE Audits reports). The following formula applies: (Number of completed actions divided by Number of total actions) x 100.
HSE Enforcement Action (Moderate Level 3 impact or greater)	An incident involving a breach of legislative or regulatory obligation(s) resulting in moderate fines (or greater) and/or legal proceedings (instituted by an external body or Regulator). Note: This is in alignment with the Stanwell's Risk Evaluation Matrix (GOV-STD-11) for Moderate Level 3 (or greater) Compliance/Legal Risk category i.e. Breach, repeated breaches or ongoing breaches of legislative or regulatory obligation/s for which there are moderate fines (\$10,001 - \$100,000 or greater) issued or likely to be issued and/or administrative action taken by a regulator to prevent or rectify the breach/s (e.g. environmental evaluation).
HSE Notifiable Incident	Any incident reported to a state-based regulator as per the requirements outlined in that state's work health and safety and/or environmental legislation.

Land and Vegetation Disturbance	Land and vegetation disturbance includes the following: • Ground Disturbance – any activity that will break the ground surface or the surface rock layer of the ground, including but not limited to tracked vehicle movements (bulldozer, excavator), post hole digging, excavation works, stockpiling activity (e.g., of soil or vegetation), grading, ripping, ploughing, dredging, blasting, drilling, placing of fill etc. Includes movement of soil from one location to another location. Excludes rubber tyre vehicle movements; • Vegetation Disturbance – pruning, thinning, trimming, clearing, burning etc. of vegetation; and • Work in the beds or banks of a watercourse, lake or spring - work along a watercourse bed or bank refers to the land that is within the line along the outer limits of the defined channel of the watercourse (i.e. that following the highest points of land in the channel that are covered by the watercourse water, whether permanently or intermittently); Excludes carrying out weed spraying, monitoring, surveying or inspections.
Leadership site visits / HSE interactions:	Planned site visits by leaders / managers which include observation of work activities being undertaken and/or HSE interactions with the workforce. A HSE Interaction is a proactive way to discuss expectations, behaviours and values. It may also be used to discuss aspects of the activity that deserve positive recognition or indicate opportunities to improve.
Licenced Construction Area (LCA)	A designated area of a construction project established only where the construction work meets the Queensland Building and Construction Commission (QBCC) licenced building work threshold and is carried out by a QBCC-licenced contractor.
Principal Contractor	Same meaning as the QLD Work Health and Safety Regulation 2011, Section 293. The person engaged as principal or main contractor for a Construction Project in accordance with the WHS legislation.
Reasonably Practicable	Same meaning as the QLD Work Health and Safety Act 2011, Section 18. In relation to a duty to ensure health and safety, means that which is, or was at a particular time, reasonably able to be done in relation to ensuring health and safety, taking into account and weighing up all relevant matters including— (a) the likelihood of the hazard or the risk concerned occurring; and (b) the degree of harm that might result from the hazard or the risk; and (c) what the person concerned knows, or ought reasonably to know, about— (i) the hazard or the risk; and (ii) ways of eliminating or minimising the risk; and (d) the availability and suitability of ways to eliminate or minimise the risk; and (e) after assessing the extent of the risk and the available ways of eliminating or minimising the risk, the cost associated with available

	ways of eliminating or minimising the risk, including whether the cost is grossly disproportionate to the risk.
Risk	Combination of the likelihood of occurrence of an event and the severity that can be caused by the event.
Safe Work Method Statement	Same meaning as the QLD Work Health and Safety Act 2011, Section 299. A safe work method statement must— (a) identify the work that is high risk construction work; and (b) state hazards relating to the high risk construction work and risks to health and safety associated with those hazards; and (c) describe the measures to be implemented to control the risks; and (d) describe how the control measures are to be implemented, monitored, and reviewed.
Serious Injury or Fatality (SIF)	A work-related injury that results in: • Fatality; or • Life-Threatening Injury - An injury that, if not immediately treated, is likely to lead to the death of the affected individual, and will usually require the intervention of internal and/or external emergency response personnel to provide life-sustaining support; or • Life-altering injury - An injury that results in permanent or long-term impairment; or loss of use of an internal organ, body function, or body part.
Worker	Same meaning as the QLD Work Health and Safety Act 2011, Section 7.

26.0 Revision History

Rev. No.	Rev. Date	Revision Description	Author	Endorse/Check	Approved By
0	21.08.2024	Procedure created to outline minimum requirements for Principal Contractors undertaking Construction Projects for Stanwell	Whitney Tobin / Jayde Smith	Shane Lubbe / Carel Rothman	Kriss Ussher
	19.08.2025	MINOR CHANGE – Minor change made to ensure the procedural deliverables and hold-points required are applicable to either a 'Project Site' or an 'LCA', depending on the Project. No increase to Rev No or Date as noted by Jayde Smith	Jayde Smith		