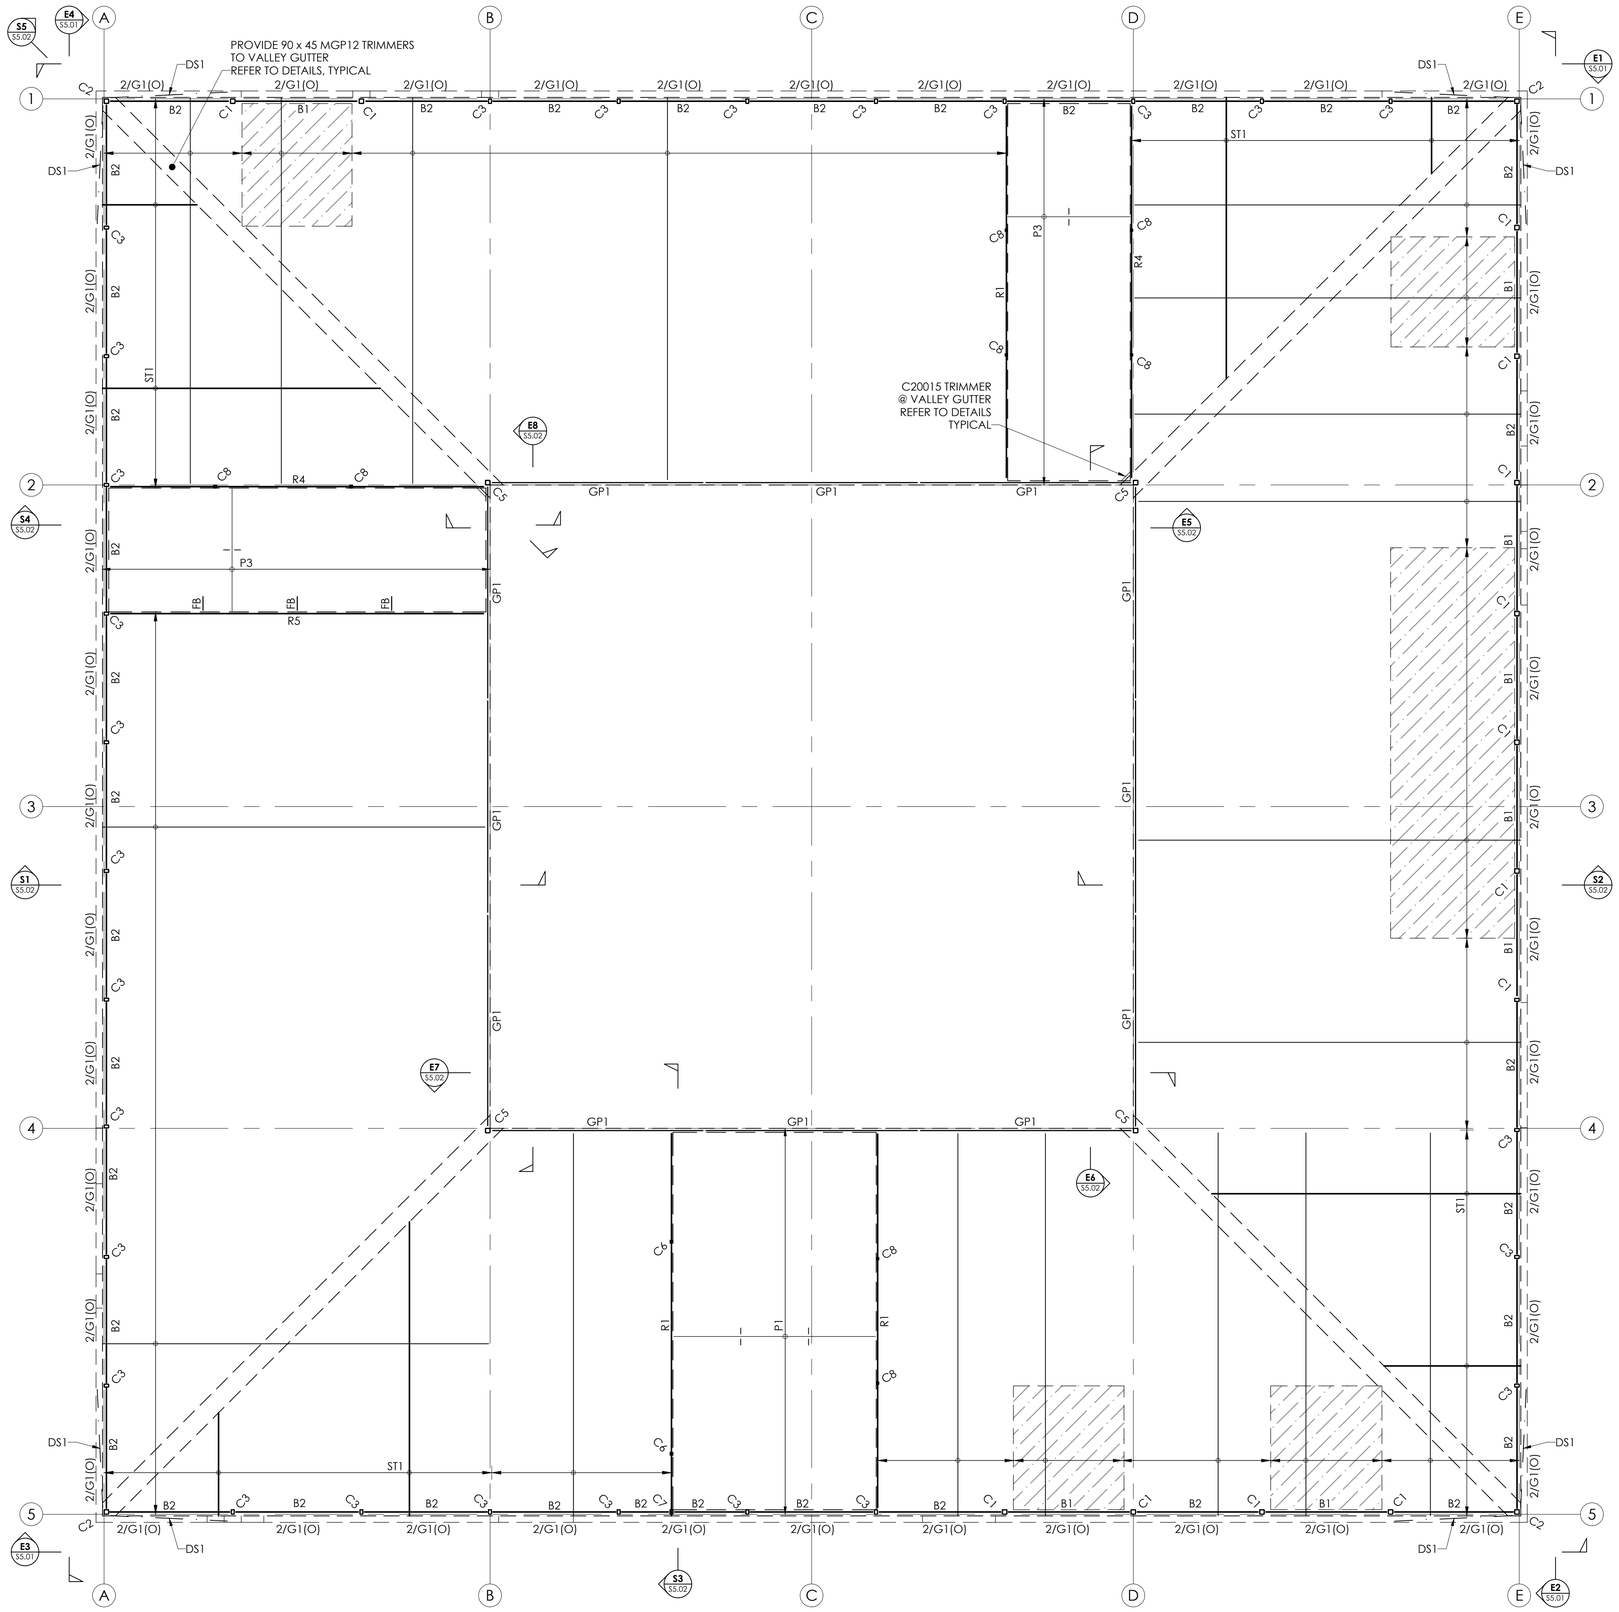

ROOF FRAMING PLAN

SCALE 1:100

INSTALL PLY AND BATTENS TO TRUSSES AND PURLINS IN ACCORDANCE WITH TYPICAL ROOF BUILDUP DETAILS ON DRAWING 25052-S6.03 B

MEMBER SCHEDULE

C1	150 x 150 x 9.0 SHS COLUMN
C2	150 x 150 x 6.0 SHS COLUMN
C3	150 x 100 x 4.0 RHS COLUMN
C4	150 x 100 x 9.0 RHS COLUMN
C5	150 x 150 x 6.0 SHS COLUMN
C6	100 x 100 x 5.0 SHS COLUMN
C7	150 x 100 x 4.0 RHS COLUMN
C8	75 x 75 x 4.0 SHS COLUMN
C9	2/Ø60 x3.6 CHS COLUMN
C10	100 x 100 x 5.0 SHS COLUMN
C41	Ø101.6 x 5.0 CHS COLUMN
C42	Ø88.9 x 4.0 CHS COLUMN
C43	Ø101.6 x 5.0 CHS COLUMN
C44	Ø76.1 x 4.5 CHS COLUMN
M1	150 x 100 x 4.0 RHS MULLION
DR1	200 x 65 LGL DROPPER
B1	200 x 100 x 5.0 RHS BEAM
B2	125 x 75 x 4.0 RHS '▭' BEAM
B3	200 x 100 x 4.0 RHS + 100 x 6.0 EA BEAM
B4	200 x 100 x 4.0 RHS BEAM
B5	250UB37 + 100 x 6.0 EA BEAM
B6	200UB25 BEAM
B7	200 PFC BEAM
B8	200 PFC BEAM
B9	150 PFC BEAM
B10	360UB57 BEAM
B41	200UB30 BEARER
B42	200UC59 BEARER
B43	200UB18 BEARER
B44	150UC30 BEARER
B45	200 PFC BEARER
B46	150UB14 BEARER
B47	200 PFC BEARER
B48	200 PFC BEARER
B49	200UB30 BEARER
B50	200 PFC BEARER
B51	150 PFC BEARER
B52	250 PFC BEARER
B53	200 PFC BEARER
B54	200 PFC BEARER
B55	200 PFC BEARER
B56	300 PFC BEARER
B57	300 PFC BEARER
R1	150 PFC RAFTER
R2	100 PFC RAFTER
R3	2/100 PFC RAFTER
R4	150 PFC RAFTER
R5	250UB37 RAFTER
H1	125 x 75 x 4.0 RHS '▭' HEAD
H2	150 x 100 x 5.0 RHS '▭' HEAD
H3	125 x 75 x 4.0 RHS '▭' HEAD
H4	200 x 65 LGL HEAD
SL1	125 x 75 x 4.0 RHS '▭' SILL
DS1	125 x 75 x 4.0 RHS '▭' DIAGONAL STRUT
SS41	200 PFC STAIR STRINGER
T1-T2	PREFABRICATED TIMBER/STEEL TRUSSES @ 1200 CRS MAX AND AS PER ARCHITECTS TRUSS SETOUT DRAWINGS
ST1	PREFABRICATED TIMBER/STEEL SADDLE TRUSSES @ 1200 CRS MAX AND AS PER ARCHITECTS TRUSS SETOUT DRAWINGS
P1	C20019 PURLINS @ 1200 CRS MAX, 5 SPACES OF 600 CRS TO OUTSIDE EDGE OF BUILDING, 2 ROWS OF BRIDGING
P2	C10012 PURLINS @ 600 CRS MAX
P3	C20015 PURLINS @ 900 CRS MAX, 5 SPACES OF 600 CRS TO OUTSIDE EDGE OF BUILDING, 1 ROW OF BRIDGING
GP1	C20015 GUTTER PURLIN
G1	C15024 GIRT
J41	C20019 JOISTS @ 600 CRS, 1 ROW OF BRIDGING
J42	C15024 JOISTS @ 600 CRS, 1 ROW OF BRIDGING
J43	C10012 JOISTS @ 450 CRS, 1 ROW OF BRIDGING
J44	100 PFC JOISTS @ 750 CRS MAX
J45	150 PFC JOISTS @ 750 CRS MAX
J46	100 PFC JOISTS @ 750 CRS MAX
J47	100 PFC JOISTS @ 750 CRS MAX
J48	150 PFC JOISTS @ 750 CRS MAX
TJ41	C20019 TRIMMER JOIST
TJ42	C15024 TRIMMER JOIST
CJ1	C20024 CEILING JOISTS @ 600 CRS MAX, 2 ROWS OF BRIDGING
CJ2	C15019 CEILING JOISTS @ 600 CRS MAX, 1 ROWS OF BRIDGING
CJ3	TS6110 TOP HATS @ 600 CRS MAX
CJ4	C10015 CEILING JOISTS @ 600 CRS MAX
CB1	30 x 0.8 GALV STEEL CEILING X-BRACING, SCREW FIX TO EVERY TRUSS BTM CHORD, WRAP AROUND AND SCREW FIX TO LAST TRUSS

Revision	Date	Revision Description	Drawn	Design	Checked
1	04/11/2025	50% CD ISSUE	TM	AH	GJ
2	21/11/2025	FOR COORDINATION	TM	AH	GJ
3	01/12/2025	90% CD ISSUE	TM	GJ	GJ
4	19/12/2025	100% CD ISSUE	TM	GJ	GJ
A	09/03/2026	SUITABLE FOR TENDER	TM	GJ	GJ
B	05/06/2026	CHANGES AS NOTED	TM	GJ	GJ

GREG JANES R.P.E.Q 10913

APPROVAL FOR ISSUE FOR AND ON BEHALF OF JANES AND STEWART STRUCTURES PTY LTD

A1 SHEET - DO NOT SCALE

0 1.0 4.0m 1:100

Client
STANWELL

Janes and Stewart Structural+Civil CONSULTANTS

Janes and Stewart Structures Pty Ltd
120 William Street | Po Box 1072
Rockhampton 4700
07 4922 1948
janes.and.stewart@jsstructures.com.au
ABN 30 620 233 025

Project
STANWELL NEW PROJECTS OFFICE

SWITCHYARD ROAD
STANWELL
QUEENSLAND, 4702

TENDER
NOT FOR CONSTRUCTION PURPOSES

Project Number: 25052

Drawing: **S4.02**

Revision: B

Title: **ROOF FRAMING PLAN**