

DIRECTORATE OF FACILITIES MANAGEMENT

ADDENDUM #10 TO:

Request for quotation

**Project: ROK TAFE Consolidation Stg.2
- Design and Construct**

**Number: CQURFQ-26-4-DFM
Addendum Issue Date:
07/04/2026**

Note: This Addendum, the Original Request for Quotation and any other documentation issued in relation to this Invitation should be retained by the Respondent for future reference.

1) Purpose of Addendum

The purpose of this Addendum is to provide additional information for intended Respondents with regard to CQUniversity RFQ, Reference: CQURFQ-26-4-DFM. The information has either become available post-issuance of the RFQ document or as a result of enquiries to date.

Note: The information provided under this Addendum must be interpreted in the context of the original RFQ document.

2) Clarifications

Question 1

- B92: Could you please provide reinforcement ratios for the following that are not provided in the Structural Set:

- Attached beams
- Edge beams
- Internal beams
- Pad footings
- Strip footings
- Plinths
- Slab on Ground with mesh (do you want us to allow small allowance for sundry bar?)
- Stairs
- CW Walls
- RC Walls

Answer 1

The concrete reinforcement rates have been included on the structural drawings.

However, where not noted allow for the following:

- For concrete stairs, allow "GENERAL SLABS" rate.
- For RC/CW Walls, allow "COLUMN" rate.
- For any other concrete element without a noted rate allow reinforcement rate of 80kg/m³

Question 2

B92: Please confirm the spec of the following ceiling codes:

- CT1
- CT2
- PB1
- PB2

Answer 2

CT1 – 1200x600 Ceiling Tiles – Armstrong Ultima.

CT2 – 1200x600 Acoustic Ceiling Tiles Includes acoustic insulation above ceiling. Armstrong Ultima OP dB + Armstrong recommended suspension system.

PB1 – Flush Set Plasterboard - painted

PB2 - Wet Area Plasterboard - Painted

Question 3

B36: The design report notes an epoxy flooring finish to the Kitchen, but the documents show vinyl flooring. Please clarify which finish to follow.

Answer 3

Drawing CQU-ROK-036-GN-ARC-28-01 Revision A - Finishes Plan & Interior Finishes Schedule Revision B show the correct floor finish to the Training Kitchen. The correct floor finish is Slip Resistant Sheet Vinyl (RF06)

Question 4

Sitewide HV: Please advise of contact details for the incumbent CQU High Voltage contractor. Could you please also confirm that the metering is monitored by BMS and there is no separate metering system required.

Answer 4

AMP Control is CQUs nominated HV Contractor.

HV Metering is not monitored by BMS.

Question 5

Can you confirm that all security requirements nominated in Appendix O (i.e. Access control to all doors, full alarm systems, etc.) should be included even though they do not appear on the drawings.

Answer 5

Yes. CQU confirms that all requirements noted in Appendix O are required.


To assist with door security, CQU has provided with this addendum a markup showing which doors specifically require swipe access control or other security requirements.

Question 6

Can you provide further detail of the aluminium vertical shade fins, specifically how they are fixed to the glazing mullions.

Answer 6

We suggest a system similar to the below detail. A male / female mullion that includes a bracket allowing fixing of a fin that aligns with centreline of mullion. Size of fin – width to match width of mullion, length to suit ESD modelling (between 150mm – 250mm long) Finish to match mullion finish.

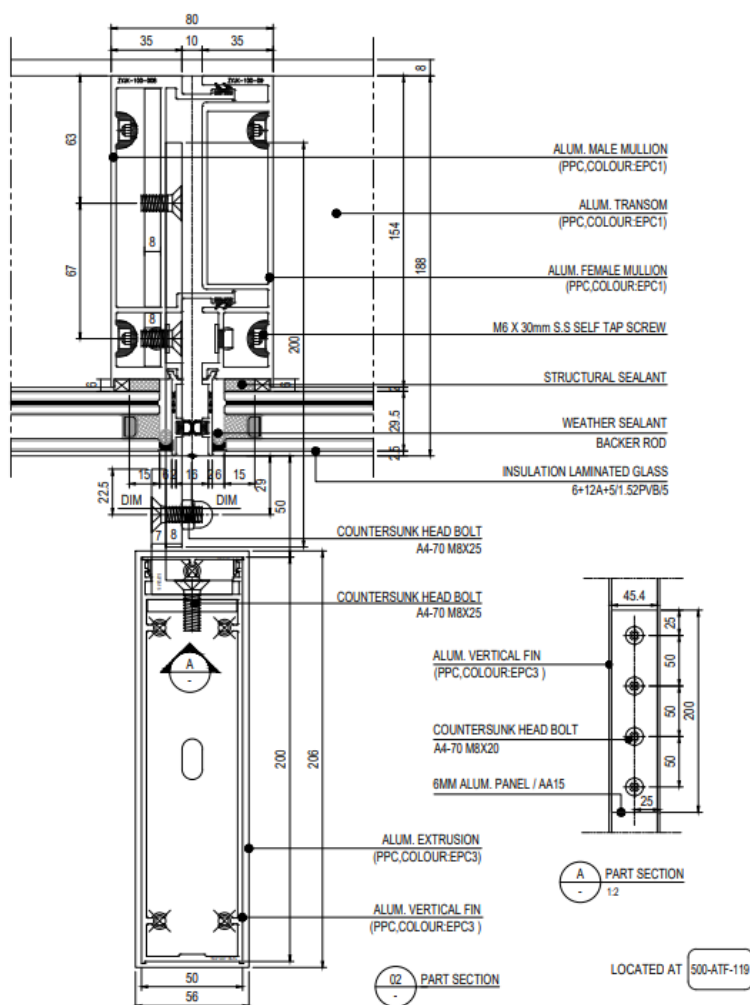

Question 7

Building 21 - Are Contractors required to retain or remove the existing dust extraction system in Building 21A? If removal and disposal are required, should we also allow for a new dust extraction system.

Answer 7

CQU will remove the extraction unit housed outside the building. Contractor is to allow for removal of the ducting within ROK21A and make good internal and external wall and surfaces once removed.

Question 8

Building 21 - The demolition plan for Building 21A does not indicate the existing shelving, loose furniture, and equipment within the shed. Will these items be removed by the client, or are we to include their disposal as part of the demolition scope? Please advise.

Answer 8

Contractor is to allow for removal and disposal as part of demolition scope.

Question 9

Building 33 - Can you please confirm if all loose furniture will be removed by CQU from Levels 1 and 2 prior to demolition.

Answer 9

Contractor is to allow for removal and disposal.

Question 10

Building 33 - Can you please confirm if the Builder is responsible for the relocation of staff items from Building 019 and staff from the City Campus into Building 33 once this building is completed.

Answer 10

Staff will relocate their own computers, tech equipment and personal items.

Contractors are to make small allowance for moving other sundry staff items. Any items to be relocated will be boxed by staff, ready for relocation by the Contractor.

Question 11

On page 21 / 30 of the Appendix A Scope of Requirements and Specification, Item 3.11.4 Security. It nominates 5,000 swipe access cards over and above to the amount stipulated in the CQ University Design Standard Manual. Can you please confirm how many are required for Separable Portion 1 and Separable Portion 2.

Answer 11

5,000 total is required. These can be split equally between SP1 (2,500) and SP2 (2,500).

Question 12

Can you confirm what type of film to be applied to internal windows and doors (offices & meeting rooms) to Building 34.

Answer 12

Building 34 does not include applied film to existing windows. Based off this question we assume you're referring to building 33. We recommend a 3M privacy film. 3M Fasara Glass Finishes Gradation – Cloud.



Question 13

Addendum 6 Item 4 notes for tenderers to allow for electronic swipe card access to all doors. Could CQU please clarify whether this is just for the New Trades Building or does this also include the Refurb Buildings?

Answer 13

This applies to all both the new buildings and refurb buildings. To assist, CQU has provided with this addendum a markup showing which doors specifically require swipe access control.

Question 14

Is all building lighting, including new and refurbished buildings, to be Dali controlled? Is there an existing system that needs to be extended in the existing buildings?

Answer 14

No. Dali controls are not to be implemented. Any dimming is to be by wall switch mounted dimmers only.

*Please note, CQU acknowledge there are further outstanding RFIs, which are currently with the design/engineer teams to respond. A response will be provided as soon as possible.