

DIRECTORATE OF FACILITIES MANAGEMENT

ADDENDUM #8 TO:

Request for quotation

**Project: ROK TAFE Consolidation Stg.2
- Design and Construct**

**Number: CQURFQ-26-4-DFM
Addendum Issue Date:
27/03/2026**

Note: This Addendum, the Original Request for Quotation and any other documentation issued in relation to this Invitation should be retained by the Respondent for future reference.

1) Purpose of Addendum

The purpose of this Addendum is to provide additional information for intended Respondents with regard to CQUniversity RFQ, Reference: CQURFQ-26-4-DFM. The information has either become available post-issuance of the RFQ document or as a result of enquiries to date.

Note: The information provided under this Addendum must be interpreted in the context of the original RFQ document.

2) Clarifications

Question 1:

There are several existing services located within the proposed building footprint that may either be retained or removed (refer to Electrical Note 1 on drawing B92-EL-DR-300-A00-00-00). Other than the stormwater services noted for demolition, could you please confirm how the client would like to proceed with the remaining services (fire, electrical, power, sewer, water, etc.).

Answer 1:

Drawing C110 TRADES BUILDING SITEWORKS LAYOUT PLAN demonstrates extent of civil demolition.

Drawing 00-HY-DR-300-A00-00-00 HYDRAULIC SERVICES - PROPOSED SITE PLAN denotes relocation of existing Sewer Pump Station.

Contractor to allow for development of site service demolition and re-instatement in next project phase.

As noted on electrical drawing B92-EL-DR-300-A00-00-00 Rev-B, Note-1, The contractor is to engage the services of a cable locator to ascertain exact location of services and seek direction from CQU on what services should be retain/redirect or removed.

Current 60% documentation is D&C and does not cover this level of documentation.

Question 2:

Could you please confirm which drawings show the correct extent of the external footpaths. Architectural drawing ARC-10-00-A and Landscape drawing L-00-DR300_3 appear to show different areas.

Answer 2:

Confirming that Landscape Drawing L-00-DR300_3 show the correct extent of external footpaths.

Question 3:

Can CQU provide ROK024 as-constructed drawings to assist with demolition pricing?

Answer 3:

Please see available drawings for ROK024 attached.

Question 4:

Can CQU provide the asbestos report for ROK024 for demolition pricing?

Answer 4:

Please refer attached.

Question 5:

Can CQU please clarify demolition scope for ROK034 ceiling and bulkheads.

Answer 5:

CQU confirms that demolition of the ceiling and bulk heads is no longer required in ROK034. Refer to *CQU ROK_Design Report_MASTER_REV_A_Attachments* – page 31 details updates to be made in next design phase.

Question 6:

Will Contractors be responsible for testing of existing fire hose reels within refurb buildings if they are to remain as part of the project?

Answer 6:

Yes.

Question 7:

What is CQU's requirement in relation to 3D models/visualisation in design as requested in the scope?

Answer 7:

CQU requires designs to be delivered in accordance with the requirements of the CQU Design Standards Manual design gateways. Regarding 3D models and visualisation, updated renders of the buildings will suffice.

Question 8:


Regarding the welding bays – Can CQU confirm if the Blackboards are on all 3 sides? And if the dividers go all the way to floor or just a bit off for sweep out?

It looks like the dividers are 150mm off the floor and than the blackboard starts at 900mm?

Answer 8:

Yes. Blackboard to all 3 sides. Dividers are to start at 800mm above floor. So dividers are open from floor level to 800mm. Refer to below elevation.

Dividers run to a height of 2100. Depending on the construction detail the blackboards are to run to approx. 2050mm.

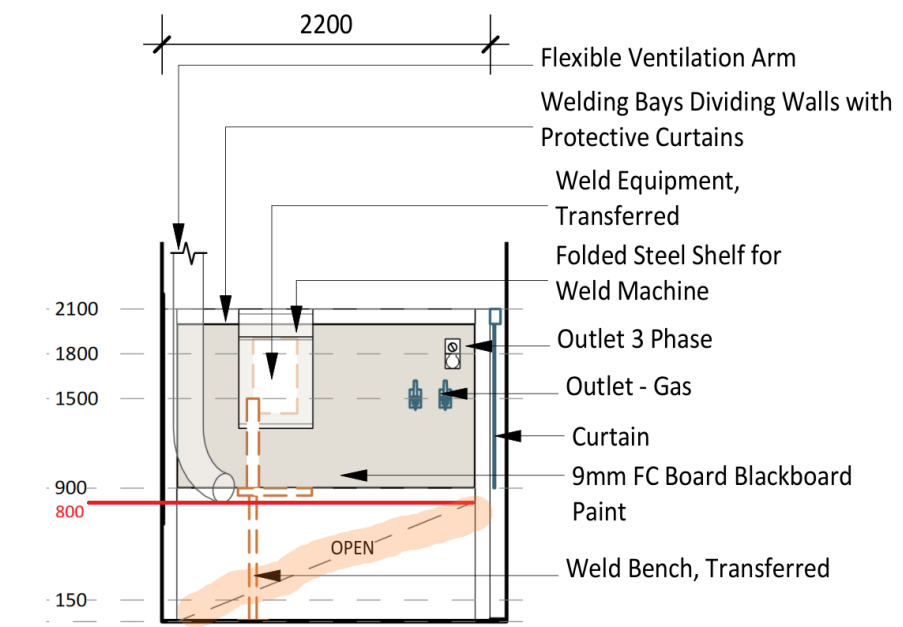

Question 9:

Below is a note on the schedule from our estimators. It looks as if we don't have the plans for the Hallway and Huddle area for ROK092. Is this something you could share with me?

Answer 9:

Please refer to the following drawings in the Architectural package for ROK092:

CQU-ROK-092-01-ARC-60-044 - RLS - TRADES - L1 - CIRCULATION / WAIT

CQU-ROK-092-GN-ARC-60-037 - RLS - TRADES - GF - CIRCULATION / WAIT

CQU-ROK-092-GN-ARC-60-036 - RLS - TRADES - GF - CIRCULATION / WAIT

Question 10:

Query from Sculptform - It seems as if one set of screens are finished in our Timber look wrap and the rest are powder coat. It is not urgent now to confirm the colours of each we can just price up as a timber look wrap and a standard powder coat. The price would change if the powder coat colour selected is a premium colour or anodised.

For the specification, could we change the 'Timber Battens' to 'Sculptform Click-on-Screens' and add a material line in for Material – Aluminium as we have Timber and Aluminium Screens.

Here is a link to our [Click-on-Screens](#) and you can see the finishes in there. Duralloy by Dulux is a standard powder coat, the Duratec by Dulux is more of a premium as it has a higher durability rate. If you would like any swatches of the colours please let me know and I can organise Dulux or any other supplier to send them to you.

Answer 10:

In some areas we will be using the timber look aluminium. In other areas we will be using Powdercoated colours (Yellow, Blue, Orange, Green). Please allow for premium finish powdercoat. We will either select from a Dulux premium range, or an Interpon premium range to ensure we colour match the battens to adjacent joinery.

At this stage we will leave the specification as is and can update once we move to the next project phase.

Question 11:

Can CQU confirm how the contract with design team is intended to be structured.

Answer 11:

CQU's contract with the design team was for services delivered up to the 60% design gateway (per the CQU Design Standards Manual).

The Design team provided CQU an estimate for completion of design services, however CQU's contract with the design team did not extend to include this work. Therefore, the contract is not being novated.

Instead, CQU nominates the design team as a Selected Subcontractor under the contract, which means that Tenderers are to contract directly with the design team for completion of design (in accordance with the CQU Design Standards Manual).

Design services over and above CQU's requirements are between Tenderers and the Design team to negotiate.

Question 12:

Does CQU have a preferred HV contractor?

Answer 12:

CQU uses AMP Control to conduct annual testing of its HV system and is to be used for any required HV isolations. However, Contractors are not bound to use AMP Control for HV works and can nominate other HV contractors if they choose.