

**CQU ROCKHAMPTON
TAFE
CONSOLIDATION -
STAGE 2**

554/700 Yaamba Rd, Norman
Gardens QLD 4701



A	12/02/26	ISSUED FOR TENDER	BS
1	30/01/26	DRAFT 60% ISSUE	BS
rev\	date	details	init.


drawn	date
PT	30/01/26
checked	date
BS	30/01/26
verified	date
BS	30/01/26

scale

**FLOOR & WALL FINISH
PLAN LEVEL 01 - ZONE 1**

scale project no.
1 : 100 @ A1 260018

revision
A
sheet no.
CQU-ROK-092-01-ARC-28-11

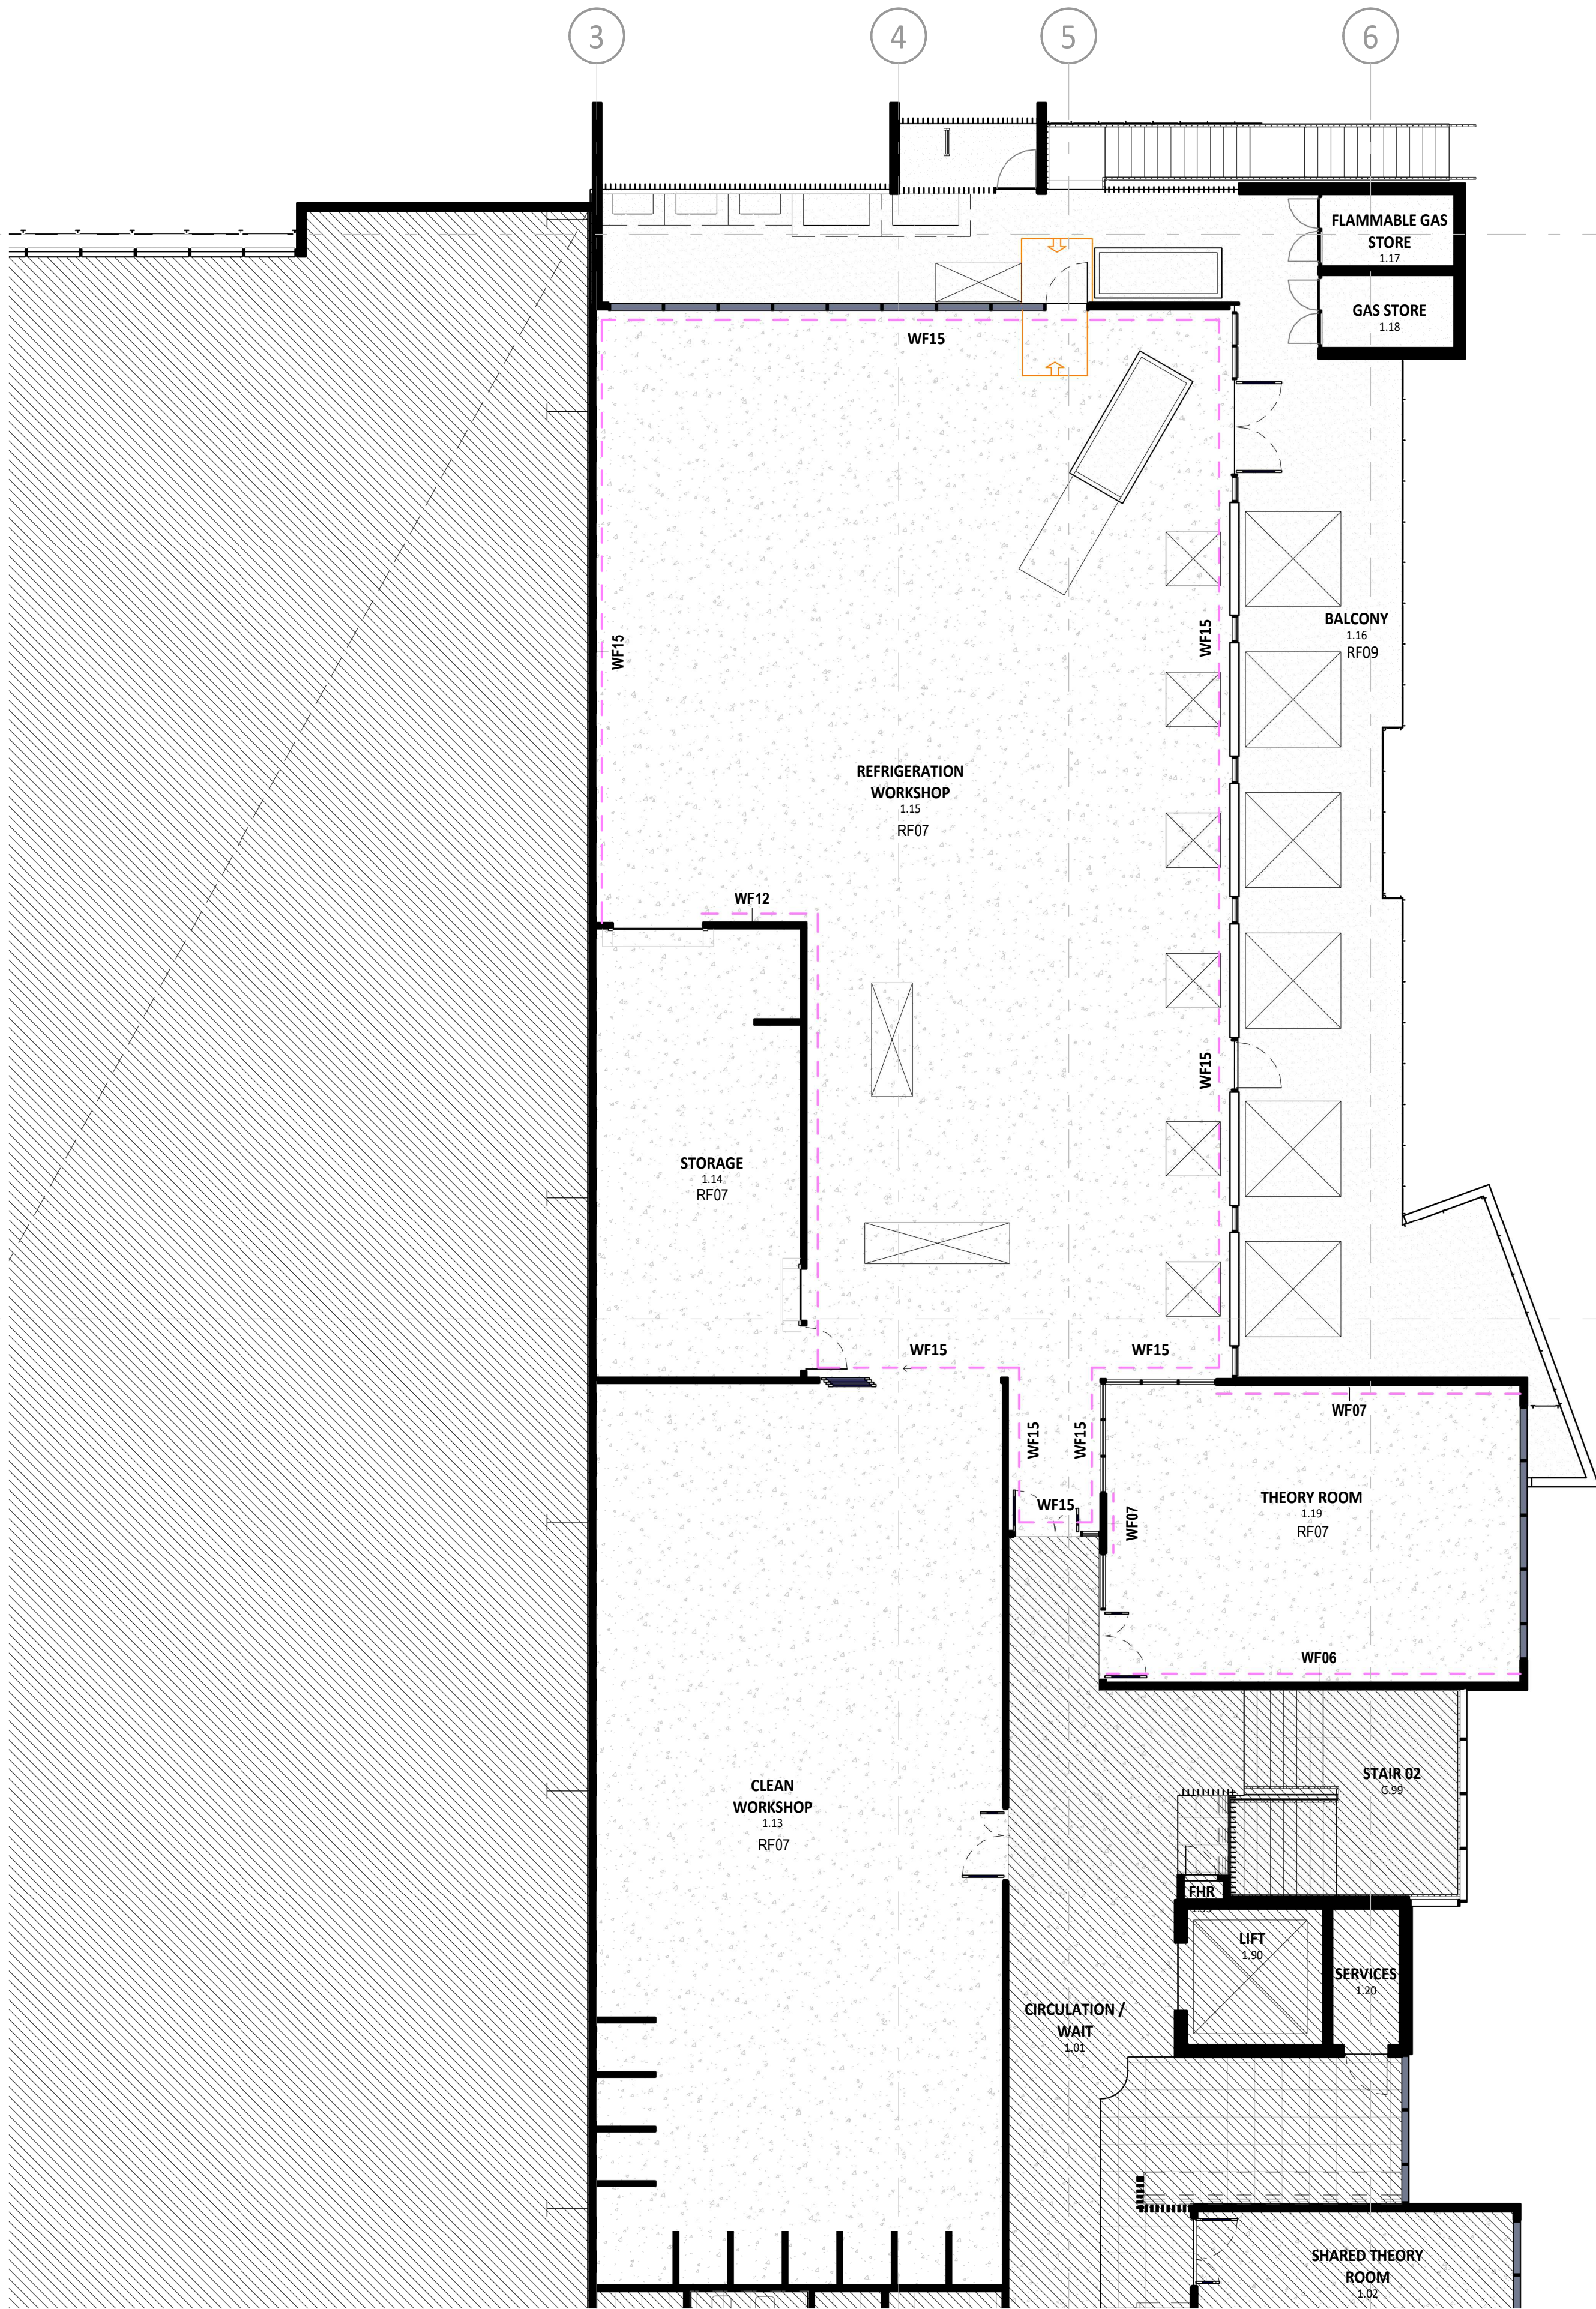

GENERAL NOTES:

- THIS DRAWING IS TO BE READ IN CONJUNCTION WITH ALL PROJECT DRAWINGS, SCHEDULES AND SPECIFICATIONS, PLUS ALL OTHER RELEVANT CONSULTANT DOCUMENTS.
- ALL WORKS TO COMPLY WITH BCA AND AUSTRALIAN STANDARDS.
- ANY DISCREPANCIES ON THE DRAWINGS OR IRREGULARITIES BETWEEN INFORMATION SHOWN ON INTERIOR DRAWINGS AND SERVICES CONSULTANTS DOCUMENTS ARE TO BE REFERRED TO THE DESIGNER FOR CLARIFICATION PRIOR TO THE WORKS PROCEEDING.
- ALL DIMENSIONS AND AREAS PROVIDED TO BE CONFIRMED ON SITE PRIOR TO COMMENCEMENT OF WORKS

FINISHES NOTES:

- ALL JUNCTIONS IN FLOOR FINISHES TO BE FLUSH.
- CHANGES TO FLOOR FINISH TO OCCUR UNDER THE CENTRE LINE OF THE DOOR LEAF UNLESS NOTED OTHERWISE.
- ALL WALLS TO BE PA01 UNLESS OTHERWISE NOTED.
- ALL SOLID CORE DOORS TO BE PA11 UNLESS OTHERWISE NOTED.
- REFER 60 SERIES DRAWINGS & SCH-INT-01 INTERIOR FINISHES SCHEDULE FOR SKIRTING TYPES AND SPECIFICATION. ALL WALLS TO RECEIVE SK01 SKIRTING UNLESS NOTED OTHERWISE.
- NEW SKIRTING TO MATCH EXISTING WHERE RELEVANT.
- ALL DOOR STATUTORY SIGNAGE AND ROOM SIGNAGE TO BE REMOVED BEFORE PAINTING.
- ALL WINDOW FURNISHING TO BE REMOVED BEFORE PAINTING, CLEANED AND REINSTALLED.
- FLOOR FINISHES TO CONTINUE UNDER NEW JOINERY.

FINISHES LEGEND

REFER SCH-INT-01 FINISHES SCHEDULE AND 60 SERIES DRAWINGS FOR FURTHER DETAILS AND SPECIFICATION

PA##	FEATURE WALL PAINT
TL##	WALL TILE
WF##	WALL FINISH
CA##	CARPET FLOOR FINISH
RF##	RESILIENT FLOOR FINISH
TL##	TILE FLOOR FINISH
PA##	PAINT FLOOR FINISH

ISSUED FOR TENDER

2
30-01
LEVEL 01 ZONE 1
1 : 100

NOTE: PLAN TO BE PRINTED IN **COLOUR**