


INTERNAL GLAZING SCHEDULE					
Window Number	Location		Size		Comments
	Room Number	Room Name	Width	Height	
GROUND LEVEL					
W.G.04.1	G.04	CIRCULATION / WAIT	6351	1400	FRAME FINISH - PC6. MULLION SET OUT TO MATCH CFC PANELS
W.G.04.3	G.04	CIRCULATION / WAIT	7256	1400	FRAME FINISH - PC6
W.G.04.4	G.04	CIRCULATION / WAIT	7290	1400	FRAME FINISH - PC6
W.G.05.3	G.05	SHARED THEORY ROOM	2065	1500	FRAME FINISH - PC6
W.G.06.1	G.06	THEORY ROOM	7282	1500	FRAME FINISH - PC6
W.G.07.1	G.07	CLASS ROOM / THEORY	5515	2400	FRAME FINISH - PC6
W.G.08.1	G.08	WORKSHOP	300	2400	FRAME FINISH - PC6
W.G.11.1	G.11	HEAT TREATMENT ROOM	900	2400	FRAME FINISH - PC6
W.G.11.2	G.11	HEAT TREATMENT ROOM	350	2400	FRAME FINISH - PC6
W.G.12.1	G.12	PRECISION MEASURE	3730	2400	FRAME FINISH - PC6
W.G.13.1	G.13	CAD CLASSROOM	6660	1400	FRAME FINISH - PC6
W.G.13.2	G.13	CAD CLASSROOM	5310	2400	FRAME FINISH - PC6
W.G.15.1	G.15	DEMONSTRATION	1477	1500	FRAME FINISH - PC6. TINTED GLAZING - CATEGORY 3 FOR EYE PROTECTION
W.G.55.1	G.55	CHASIS DYNAMOMETER	1200	2400	FRAME FINISH - PC6
W.G.55.2	G.55	CHASIS DYNAMOMETER	2127	2400	FRAME FINISH - PC6
W.G.62.1	G.62	THEORY ROOM 1	7310	2400	FRAME FINISH - PC6
W.G.63.1	G.63	THEORY ROOM 2	7054	1400	FRAME FINISH - PC6
W.G.63.2	G.63	THEORY ROOM 2	6620	2400	FRAME FINISH - PC6
W.G.64.1	G.64	ONLINE TEACHING	600	1380	FRAME FINISH - PC6
W.G.64.2	G.64	ONLINE TEACHING	1309	2400	FRAME FINISH - PC6
W.G.65.2	G.65		5760	1200	FRAME FINISH - PC6
W.G.65.3			436	2400	FRAME FINISH - PC6
W.G.66.2	G.66		7060	1200	FRAME FINISH - PC6
W.G.66.3			1644	2400	FRAME FINISH - PC6
W.G.74.2	G.74	SHARED THEORY ROOM	6000	1400	FRAME FINISH - PC6. MULLION SET OUT TO MATCH CFC PANELS
W.G.75.2	G.75	STUDENT KITCHENETTE / LOUNGE	1830	2100	FRAME FINISH - PC6
LEVEL 01					
W.1.01.2	1.01	CIRCULATION / WAIT	1600	2100	FRAME FINISH - PC6
W.1.02.2	1.02	SHARED THEORY ROOM	6660	1500	FRAME FINISH - PC6
W.1.04.5	1.04	STAFF KITCHENETTE / LOUNGE	5524	2100	FRAME FINISH - PC6
W.1.04.6	1.04	STAFF KITCHENETTE / LOUNGE	7314	3000	FRAME FINISH - PC6
W.1.05.2	1.05	TEACHING STAFF OPEN OFFICE	4745	2100	FRAME FINISH - PC6
W.1.05.3	1.05	TEACHING STAFF OPEN OFFICE	2100	600	FRAME FINISH - PC6
W.1.05.8	1.05	TEACHING STAFF OPEN OFFICE	12144	2100	FRAME FINISH - PC6
W.1.05.9			1942	3000	FRAME FINISH - PC6
W.1.07.1	1.07	1 PERSON MEETING ROOM	1900	2400	FRAME FINISH - PC6
W.1.08.1	1.08	SHARED MEETING ROOM	2200	2400	FRAME FINISH - PC6
W.1.08.2	1.08	SHARED MEETING ROOM	3400	2400	FRAME FINISH - PC6
W.1.13.1	1.13	CLEAN WORKSHOP	15310	2000	FRAME FINISH - PC6
W.1.13.2	1.13	CLEAN WORKSHOP	13885	2100	FRAME FINISH - PC6
W.1.15.4	1.15	REFRIGERATION WORKSHOP	1915	2400	FRAME FINISH - PC6
W.1.15.5	1.15	REFRIGERATION WORKSHOP	13578	2100	FRAME FINISH - PC6
W.1.19.1	1.19	THEORY ROOM	2492	2400	FRAME FINISH - PC6
W.1.19.3	1.19	THEORY ROOM	2451	2400	FRAME FINISH - PC6
W.1.19.4			2936	2400	FRAME FINISH - PC6

NOTE: REFER TO PARTITION PLAN FOR ACOUSTIC RATINGS
GLAZING SUITES WITHIN ACOUSTICALLY RATED WALLS TO HAVE THE SAME ACOUSTIC Rw RATING

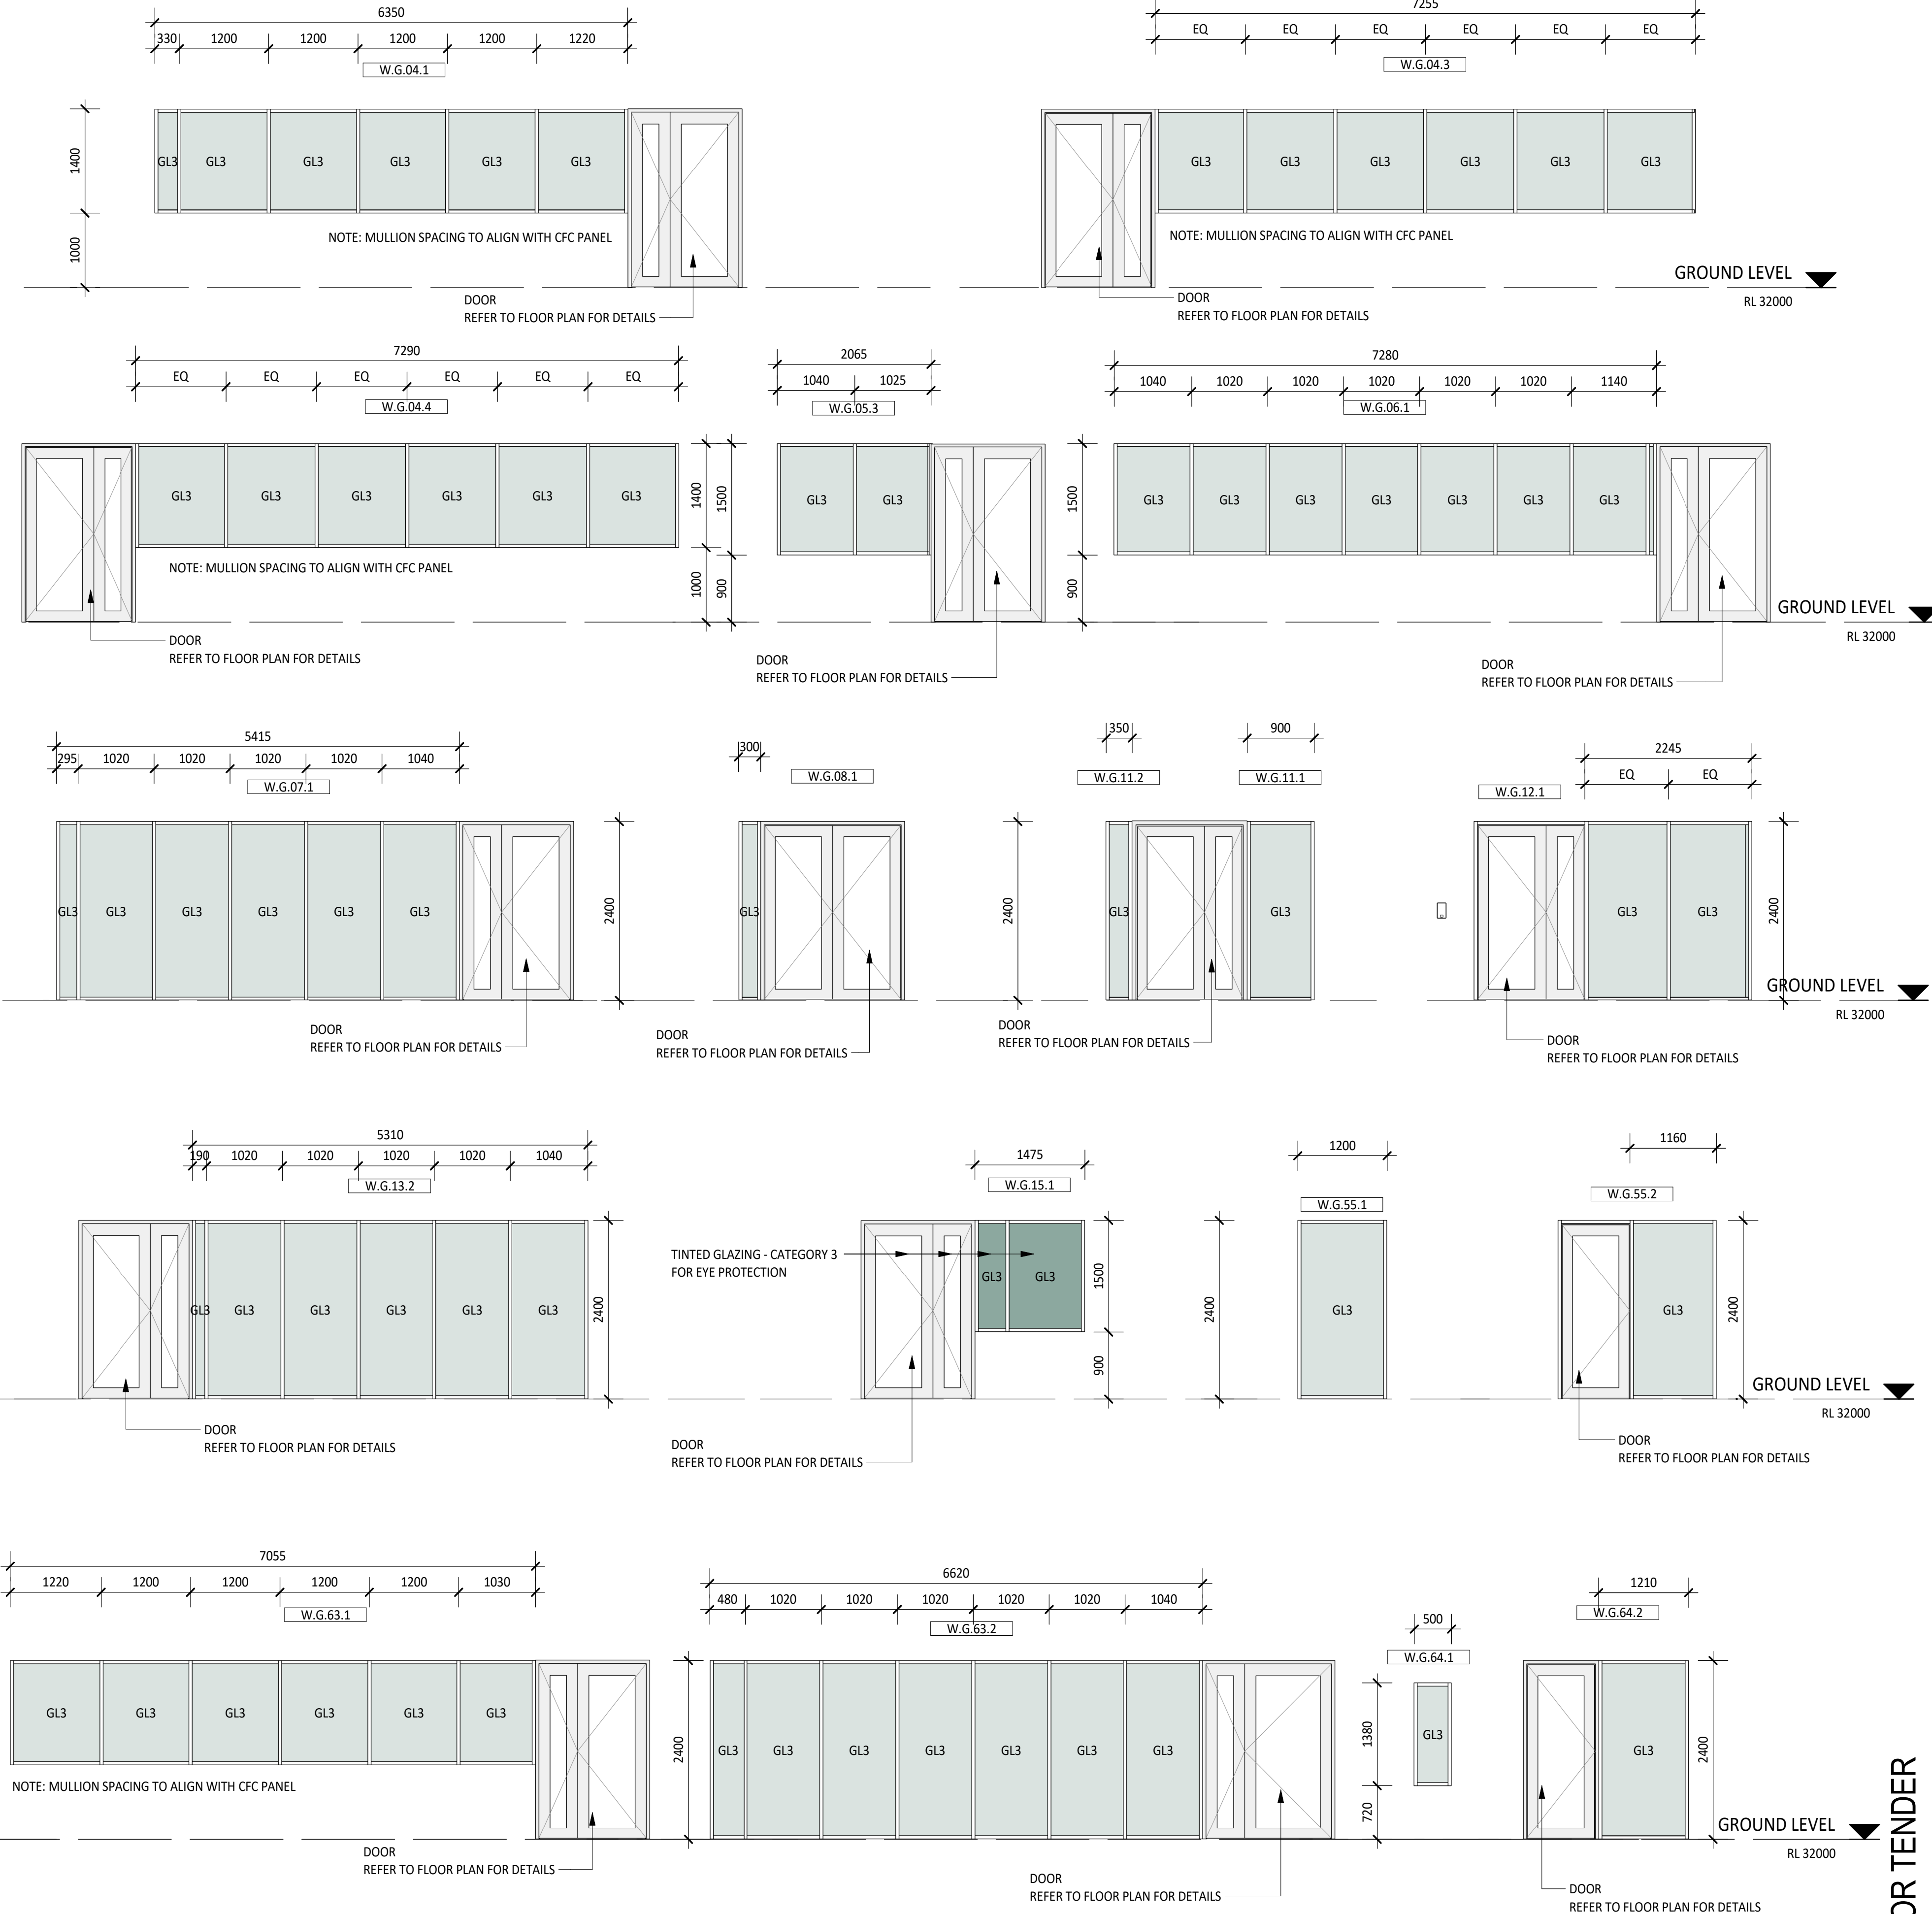

thomson
adsett

**PEDDLE THORP**
architecture | interiors | health | planning

Telephone +61 7 3840 9999
bne@thomsonadsett.com
Level 9, 470 St Pauls Terrace
Fortitude Valley
Qld 4006 Australia
thomsonadsett.com

© Copyright
These drawings and designs and the copyright thereof are the property of Thomson Adsett Pty Ltd and must not be used, retained or copied without written permission of Thomson Adsett Pty Ltd. ABN 76 105 314 654 Trading as ThomsonAdsett. Dimensions take precedence over scaling. Do not measure off drawings as print sizes may vary

**CQU ROCKHAMPTON
TAFE
CONSOLIDATION -
STAGE 2**

554/700 Yaamba Rd, Norman
Gardens QLD 4701

for

**CQUniversity
AUSTRALIA**

A	12/02/26	ISSUED FOR TENDER	BS
1	30/01/26	DRAFT 60% ISSUE	BS
rev	date	details	init.

drawn	date
PT	30/01/26
checked	date
BS	30/01/26
verified	date
BS	30/01/26

scale

**INTERNAL GLAZING
ELEVATIONS**

scale
1 : 50 @ A1

revision
A

sheet no.
CQU-ROK-092-00-ARC-52-11

project no.
260018

ISSUED FOR TENDER