


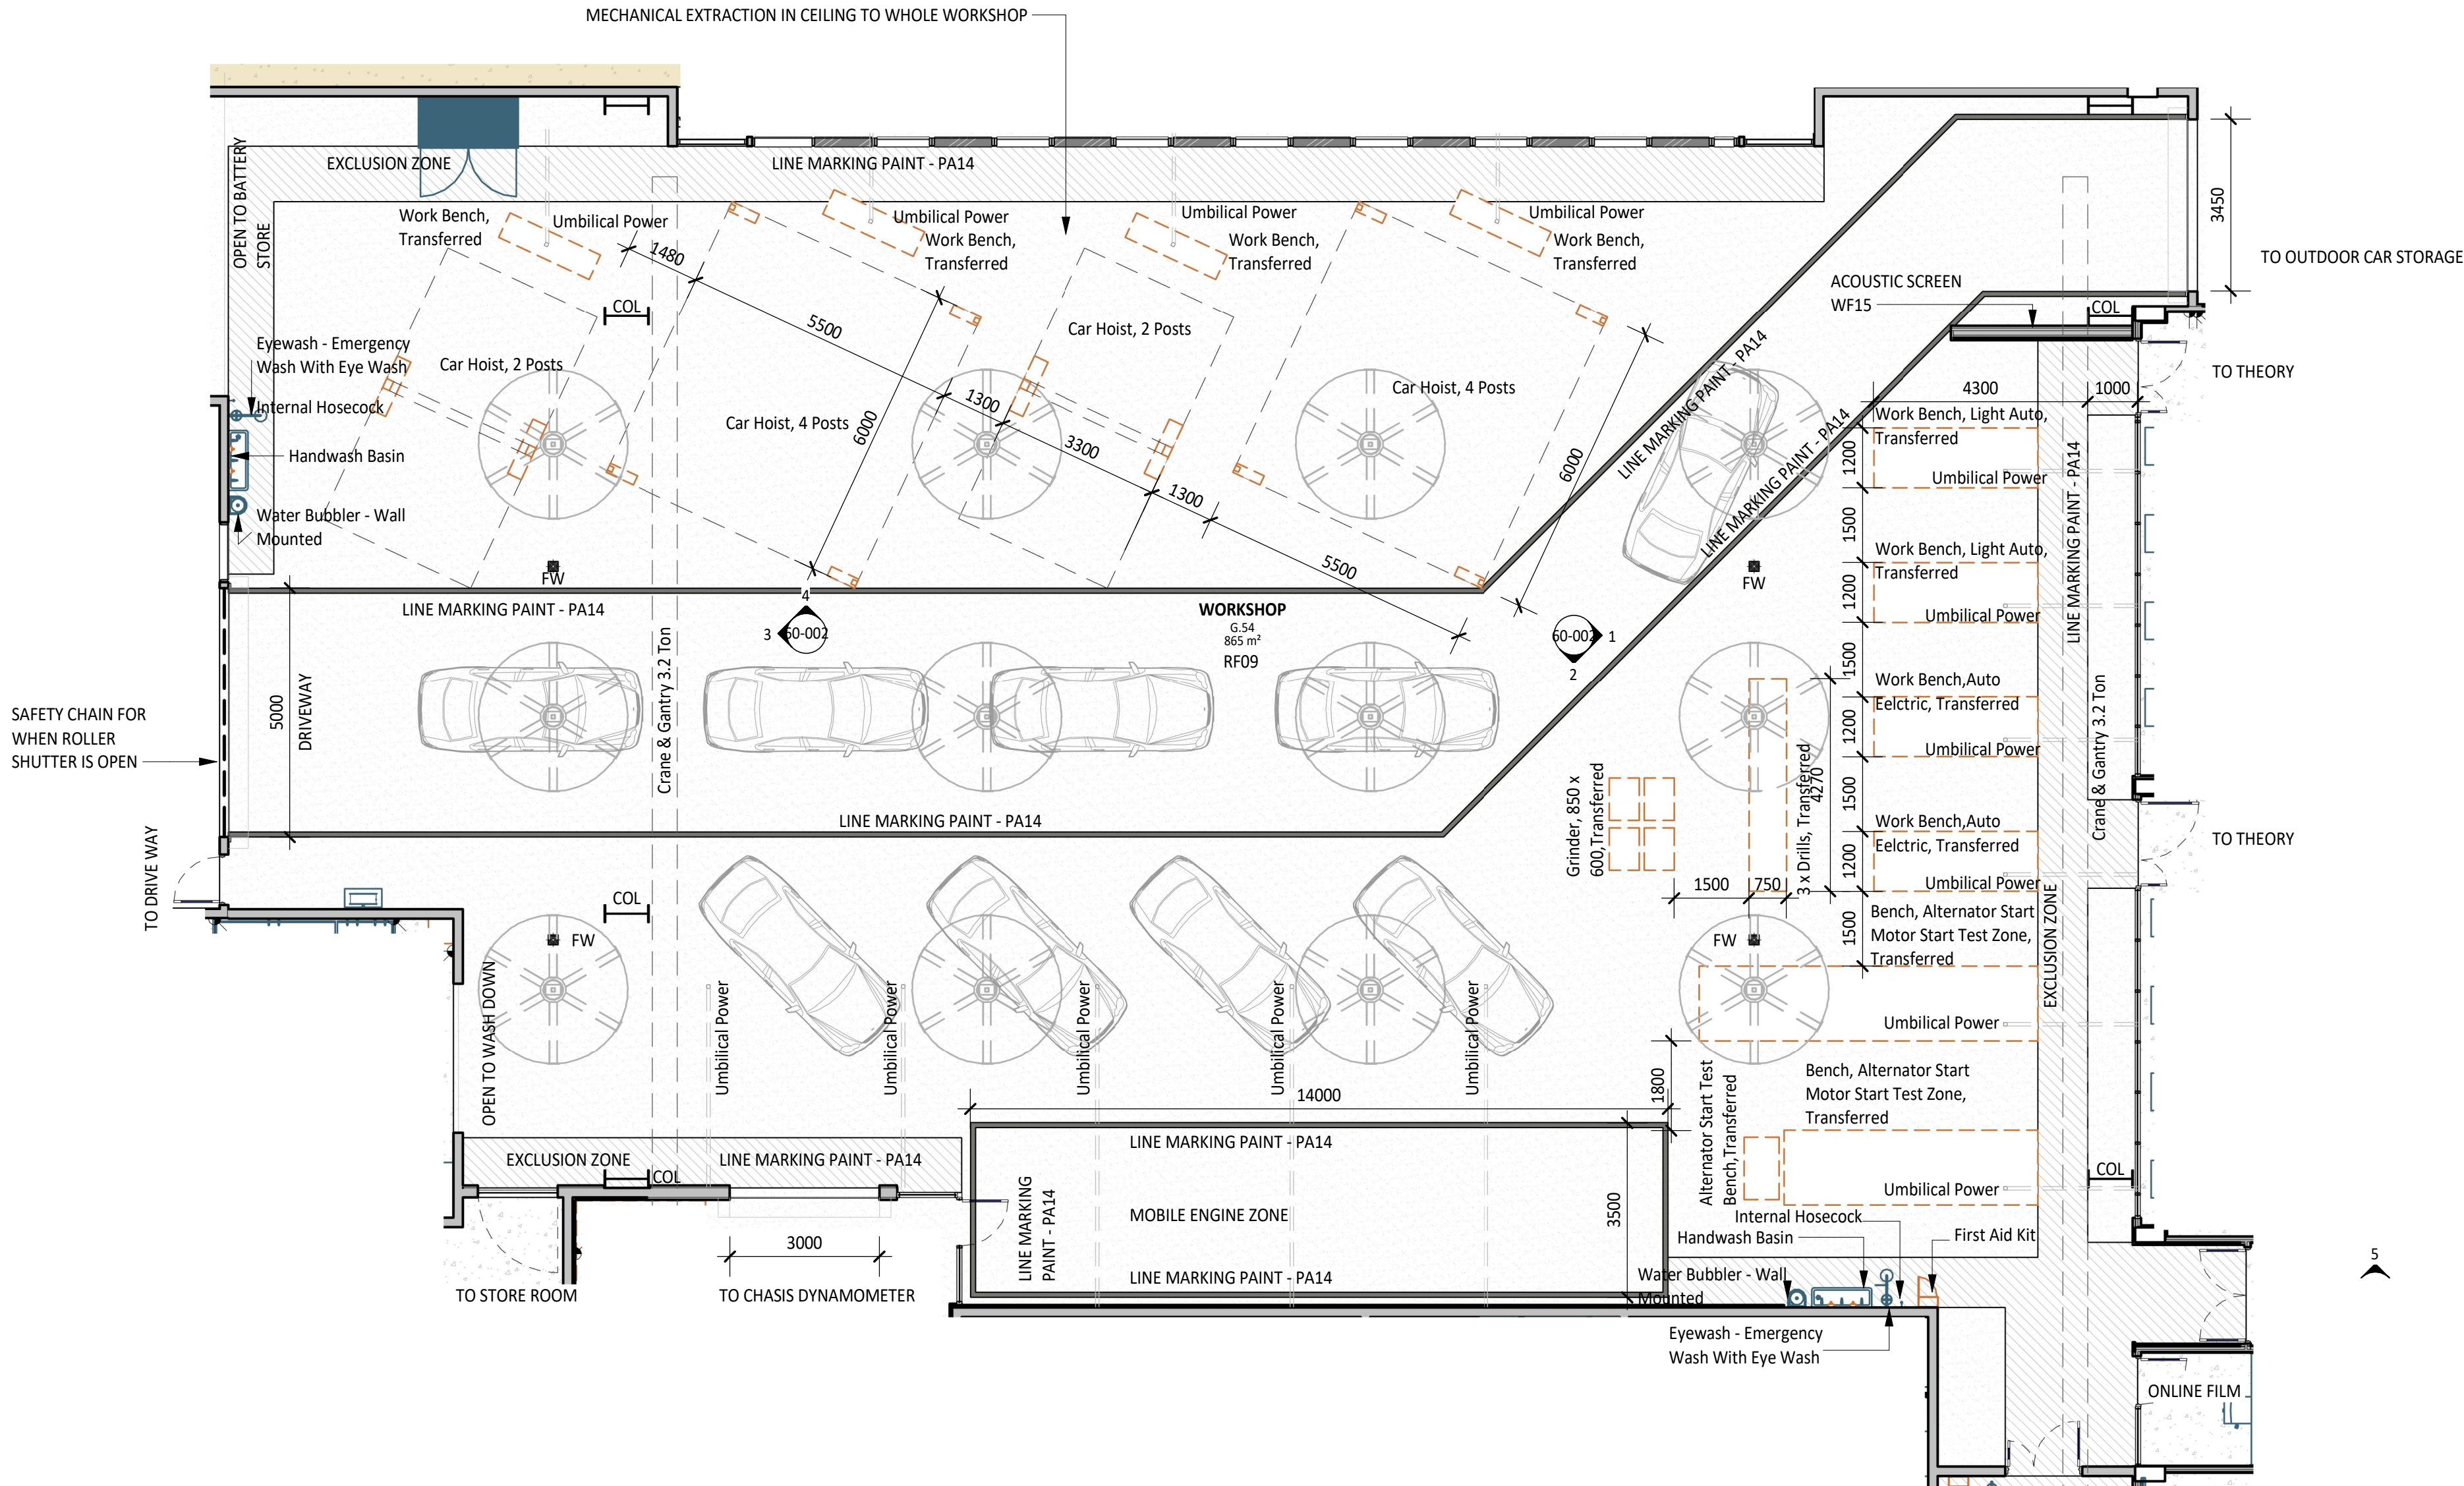

40-LEGEND FFE - WORKSHOP G.54			
Code	Description	Group	Count
BN11A	Hand Wash Trough - 3 taps	1	2
CD3A	Emergency Call	1	1
CF1A	Ceiling Fan - Powerfoil D, 6 Aluminum Airfoils	1	12
DB	Services - Distribution Board	1	1
FHR	Fire Hose Reel	1	1
HY6A	Water Bubbler - Wall Mounted	1	2
SR1A	Eyewash - Emergency Wash With Eye Wash	1	2
ST75A	Storage, 900mm X 600mm	1	2
TWSA	Internal Hosecock	1	2
UMB	Umbilical Power	1	15
CA1A	First Aid Kit	2	1
DS12A	Dispenser - Soap	2	4
EQ37_T	Grinder, 850 x 600, Transferred	2T	4
EQ38_T	3 x Drills, Transferred	2T	1
HC2A_T	Car Hoist, 2 Posts	2T	2
HC4A_T	Car Hoist, 4 Posts	2T	2
WB42A_T	Work Bench, Light Auto, Transferred	2T	2
WB42B_T	Work Bench, Auto Electric, Transferred	2T	2
WB45A_T	Alternator Start Test Bench, Transferred	2T	1
WB45B_T	Bench, Alternator Start Motor Start Test Zone, Transferred	2T	1
WB45C_T	Bench, Alternator Start Motor Start Test Zone, Transferred	2T	1
WB50A_T	Work Bench, Transferred	2T	4

ROOM LAYOUT SHEET NOTES

- ALL ARCHITECTURAL DRAWINGS TO BE READ IN CONJUNCTION WITH OTHER DISCIPLINES.
- REFER TO FF&E, SANITARYWARE SCHEDULES FOR ALL FURNITURE, FIXTURES, AND EQUIPMENT.
- REFER TO ENGINEER'S DRAWINGS FOR DETAILS ON FIRE EXTINGUISHERS AND FIRE BLANKETS
- REFER TO ELECTRICAL DOCUMENTATION FOR OUTLET DETAILS (ie. POWER, DATA, COMMS etc.)
- REFER TO AUDIO VISUAL DOCUMENTATION (VideoPro) FOR AV REQUIREMENTS AND DETAILS.
- AV SUPPLIER TO CONFIRM EXACT POSITIONS OF EQUIPMENT ON SITE
- ALL FF&E ITEMS ARE TO BE READ IN CONJUNCTION WITH FF&E SCHEDULES AND CQU DESIGN MANUAL.
- ALL FF&E AND TRANSFER ITEMS TO BE CONFIRMED BY THE CLIENT.
- PROVIDE ALLOWANCE AND ADD SUPPORT TO WALLS, WHERE FITTINGS ARE WALL MOUNTED. THIS INCLUDES BUT NOT LIMITED TO HANDBASINS, HANDRAILS, SCREENS, PROJECTORS, etc.
- SPECIALISED EQUIPMENT ARE SUPPLIED BY CLIENT AND INSTALLED BY THE BUILDER-CONTRACTOR.
- FF&E COUNT IS FOR INFORMATION ONLY. THE TOTAL NUMBER OF FF&E ITEMS ARE TO BE CONFIRMED WITH CLIENT AND ARCHITECTS BEFORE PURCHASE OF ITEMS.
- CONFIRM ALL DIMENSIONS ON SITE FOR JOINERY ITEMS.
- REFER TO EQUIPMENT AUDIT SPREADSHEET FOR DETAILS OF TRANSFER EQUIPMENT
- CONTRACTOR RESPONSIBLE FOR ALL TRANSFER INCLUDING DISCONNECTION, RECONNECTION, AND INSTALLATION OF TRANSFER EQUIPMENT
- POWER AND DATA POINTS SHOWN ON THE ROOM LAYOUT SHEETS WERE SHOWN AND DISCUSSED DURING USER GROUP BRIEFING. THESE RELATE TO PARTICULAR EQUIPMENT THAT WAS DISCUSSED AS REQUIRING POWER AND DATA. THESE REFLECT STAKEHOLDER EXPECTATIONS FOR SPECIFIC POWER AND DATA POINTS AND HAVE REMAINED IN THE DOCUMENTATION AS A USEFUL REFERENCE FOR THE CONTRACTOR. THESE ARE NOT A COMPLETE QUANTITY AND SPECIFICATION OF POWER AND DATA. THE CONTRACTOR IS TO REFER TO ELECTRICAL ENGINEER'S DOCUMENTATION FOR ALLOWANCE. REFER TO ELECTRICAL DOCUMENTATION FOR AMPS AND 3 PHASE POWER REQUIREMENTS. REFER TO AUDIO VISUAL (VIDEOPRO) DOCUMENTATION FOR ADDITIONAL POWER AND DATA REQUIREMENTS
- ALLOW FOR STRUCTURAL PLY BACKING BEHIND PLASTERBOARD FOR FULL EXTENT OF WALLS WITH MOUNTED AUDIO VISUAL EQUIPMENT. REFER TO AUDIO VISUAL (VIDEOPRO) DOCUMENTATION FOR LOCATIONS OF WALL MOUNTED EQUIPMENT.
- REFER TO FLOOR PLANS FOR DETAILS ON DOORS
- ALL THEORY ROOMS, CAD CLASS ROOMS, MEETING ROOMS, ONLINE TEACHING CLASS ROOMS WITH INTERNAL GLAZING ARE TO INCLUDE BLOCK OUT ROLLER BUNDS FOR SECURITY.
- HEARING AUGMENTATION TO AUSTRALIAN STANDARDS – REFER VIDEOPRO AND ELECTRICAL SPECIFICATION

FF&E LEGEND

- GROUP 1 ITEMS - PROVIDED & FITTED UNDER CONTRACT
 - GROUP 2 ITEMS - PROVIDED BY CLIENT & FITTED UNDER CONTRACT
 - GROUP 2T ITEMS - EXISTING EQUIPMENT - RELOCATED & FITTED UNDER CONTRACT
 - GROUP 3 ITEMS - PROVIDED & INSTALLED BY CLIENT
- PLANS TO BE PRINTED IN COLOUR

thomson
adsett

**PEDDLE THORP**
architecture | interiors | health | planning

Telephone +61 7 3840 9999
bne@thomsonadsett.com
Level 9, 470 St Pauls Terrace
Fortitude Valley
Qld 4006 Australia
thomsonadsett.com

© Copyright
These drawings and designs and the copyright thereof are the property of Thomson Adsett Pty Ltd and must not be used, retained or copied without written permission of Thomson Adsett Pty Ltd. A.B.N 76 105 314 654 Trading as ThomsonAdsett. Dimensions take precedence over scaling. Do not measure off drawings as print sizes may vary

CQU ROCKHAMPTON
TAFE
CONSOLIDATION -
STAGE 2

554/700 Yaamba Rd, Norman
Gardens QLD 4701



A	12/02/26	ISSUED FOR TENDER	BS
1	30/01/26	DRAFT 60% ISSUE	BS
rev/	date	details	init.

drawn	date
PT	30/01/26
checked	date
BS	30/01/26
verified	date
BS	30/01/26

scale

RLS - AUTO - GF -
WORKSHOP

scale
1 : 100 @ A1

project no.
260018

revision
A

sheet no.
CQU-ROK-092-GN-ARC-60-001

ISSUED FOR TENDER