





1 PLAN DETAIL
30-01 1 : 50


40-LEGEND FFE - CLASS ROOM / THEORY G.07			
Code	Description	Group	Count
AV3A	Projector - Data Ceiling Mounted	1	1
BD15D	Refer to AV Consultant's documentation for size and specification	1	1
CA	Compressed Air Outlet - Single	1	2
CH11A	Chair - Ergonomic	1	15
CL7C	Roller Blind - Transparent and Room Darkener	1	11
FB	Floorbox	1	6
TB45B	Table - Student - 1200x750	1	14
TB55A	Lectern - Teacher	1	1
DATA	OUTLET: data, double RJ45, wall mounted	ELEC	2
DGPO	Double GPO Power Outlet Wall Mounted	ELEC	4

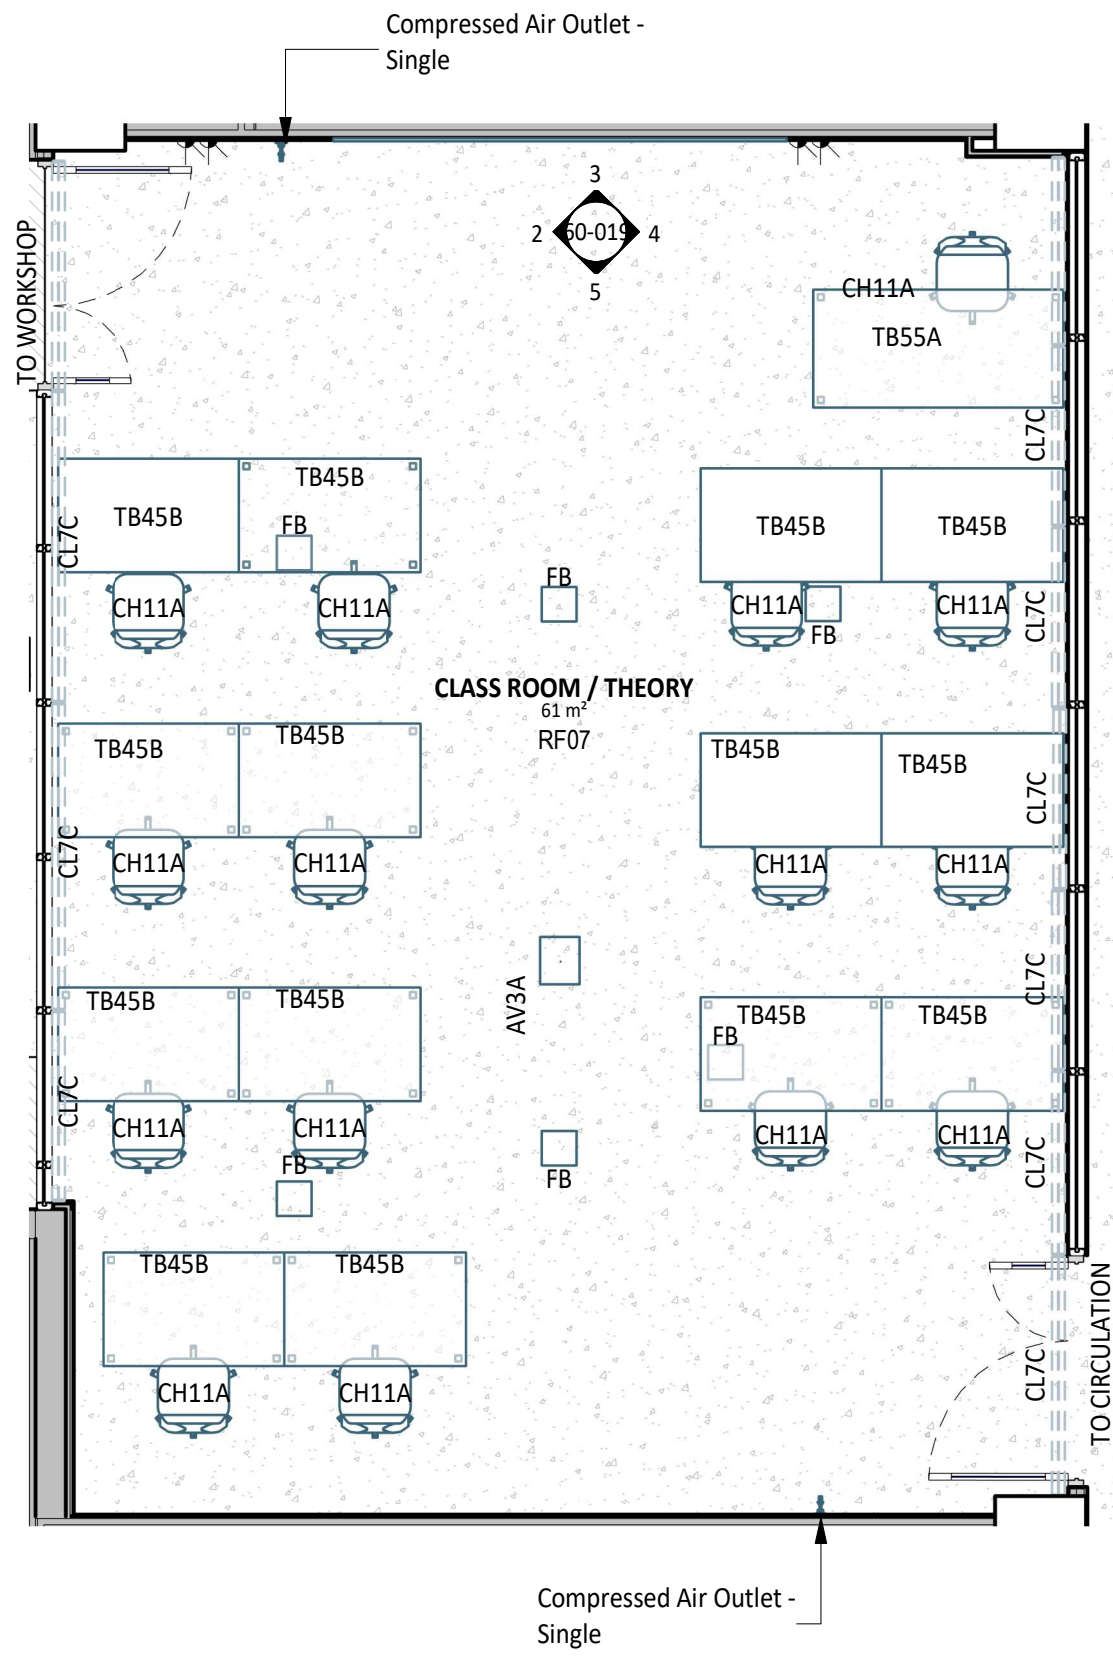


2 ELEVATION DETAIL
60-019 1 : 50

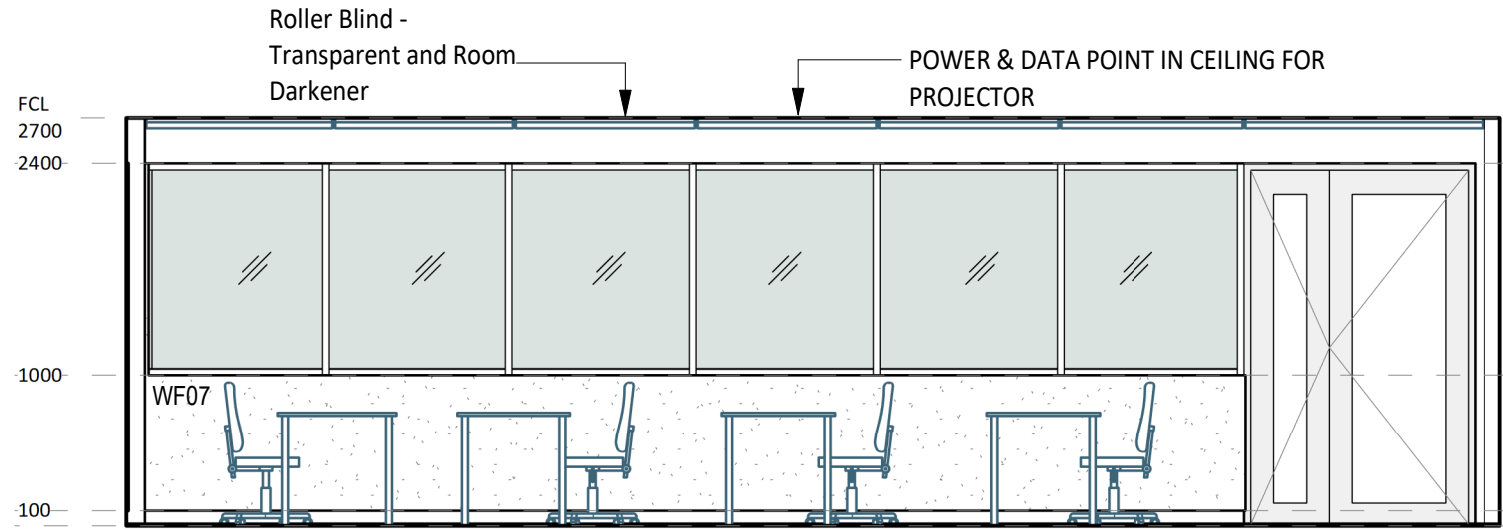

4 ELEVATION DETAIL
60-019 1 : 50

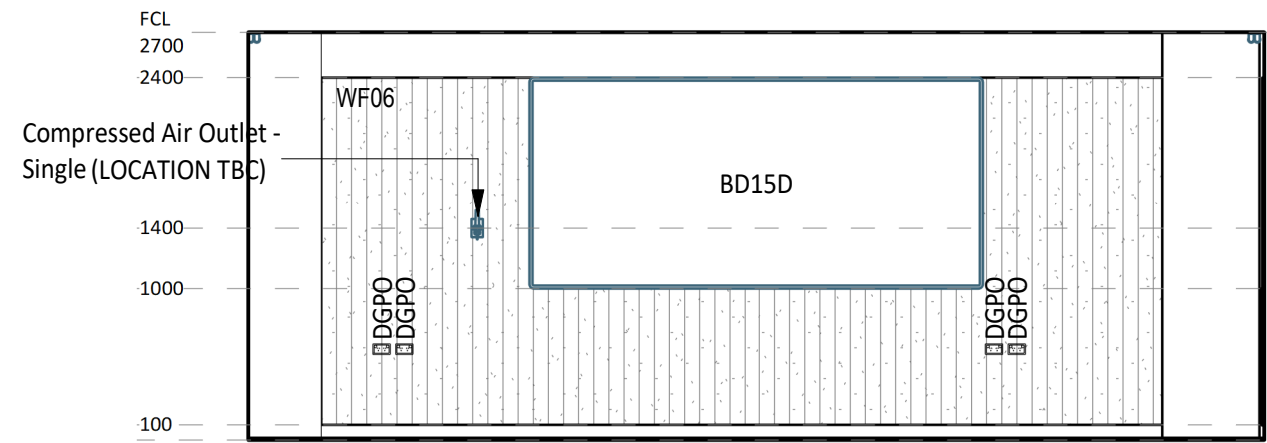

3 ELEVATION DETAIL
60-019 1 : 50

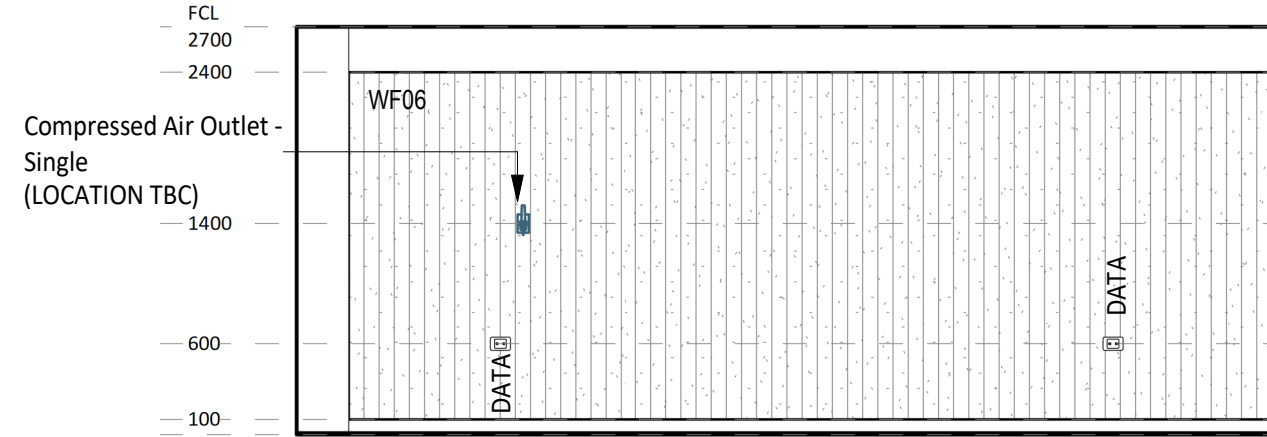

5 ELEVATION DETAIL
60-019 1 : 50

ROOM LAYOUT SHEET NOTES

1. ALL ARCHITECTURAL DRAWINGS TO BE READ IN CONJUNCTION WITH OTHER DISCIPLINES.

2. REFER TO FF&E, SANITARYWARE SCHEDULES FOR ALL FURNITURE, FIXTURES, AND EQUIPMENT.

3. REFER TO ENGINEER'S DRAWINGS FOR DETAILS ON FIRE EXTINGUISHERS AND FIRE BLANKETS

4. REFER TO ELECTRICAL DOCUMENTATION FOR OUTLET DETAILS (ie. POWER, DATA, COMMS etc.)

5. REFER TO AUDIO VISUAL DOCUMENTATION (VideoPro) FOR AV REQUIREMENTS AND DETAILS.

6. AV SUPPLIER TO CONFIRM EXACT POSITIONS OF EQUIPMENT ON SITE

7. ALL FF&E ITEMS ARE TO BE READ IN CONJUNCTION WITH FF&E SCHEDULES AND CQU DESIGN MANUAL.

8. ALL FF&E AND TRANSFER ITEMS TO BE CONFIRMED BY THE CLIENT.

9. PROVIDE ALLOWANCE AND ADD SUPPORT TO WALLS, WHERE FITTINGS ARE WALL MOUNTED. THIS INCLUDES BUT NOT LIMITED TO HANDBASINS, HANDRAILS, SCREENS, PROJECTORS, etc.

10. SPECIALISED EQUIPMENT ARE SUPPLIED BY CLIENT AND INSTALLED BY THE BUILDER-CONTRACTOR.

11. FF&E COUNT IS FOR INFORMATION ONLY. THE TOTAL NUMBER OF FF&E ITEMS ARE TO BE CONFIRMED WITH CLIENT AND ARCHITECTS BEFORE PURCHASE OF ITEMS.

12. CONFIRM ALL DIMENSIONS ON SITE FOR JOINERY ITEMS.

13. REFER TO EQUIPMENT AUDIT SPREADSHEET FOR DETAILS OF TRANSFER EQUIPMENT

14. CONTRACTOR RESPONSIBLE FOR ALL TRANSFER INCLUDING DISCONNECTION, RECONNECTION, AND INSTALLATION OF TRANSFER EQUIPMENT

15. POWER AND DATA POINTS SHOWN ON THE ROOM LAYOUT SHEETS WERE SHOWN AND DISCUSSED DURING USER GROUP BRIEFING. THESE RELATE TO PARTICULAR EQUIPMENT THAT WAS DISCUSSED AS REQUIRING POWER AND DATA. THESE REFLECT STAKEHOLDER EXPECTATIONS FOR SPECIFIC POWER AND DATA POINTS AND HAVE REMAINED IN THE DOCUMENTATION AS A USEFUL REFERENCE FOR THE CONTRACTOR. THESE ARE NOT A COMPLETE QUANTITY AND SPECIFICATION OF POWER AND DATA. THE CONTRACTOR IS TO REFER TO ELECTRICAL ENGINEER'S DOCUMENTATION FOR ALLOWANCE. REFER TO ELECTRICAL DOCUMENTATION FOR AMPS AND 3 PHASE POWER REQUIREMENTS. REFER TO AUDIO VISUAL (VIDEOPRO) DOCUMENTATION FOR ADDITIONAL POWER AND DATA REQUIREMENTS

16. ALLOW FOR STRUCTURAL PLY BACKING BEHIND PLASTERBOARD FOR FULL EXTENT OF WALLS WITH MOUNTED AUDIO VISUAL EQUIPMENT. REFER TO AUDIO VISUAL (VIDEOPRO) DOCUMENTATION FOR LOCATIONS OF WALL MOUNTED EQUIPMENT.

17. REFER TO FLOOR PLANS FOR DETAILS ON DOORS

18. ALL THEORY ROOMS, CAD CLASS ROOMS, MEETING ROOMS, ONLINE TEACHING CLASS ROOMS WITH INTERNAL GLAZING ARE TO INCLUDE BLOCK OUT ROLLER BLINDS FOR SECURITY.

19. HEARING AUGMENTATION TO AUSTRALIAN STANDARDS – REFER VIDEOPRO AND ELECTRICAL SPECIFICATION

FF&E LEGEND

GROUP 1 ITEMS - PROVIDED & FITTED UNDER CONTRACT

GROUP 2 ITEMS - PROVIDED BY CLIENT & FITTED UNDER CONTRACT

GROUP 2T ITEMS - EXISTING EQUIPMENT - RELOCATED & FITTED UNDER CONTRACT

GROUP 3 ITEMS - PROVIDED & INSTALLED BY CLIENT

PLANS TO BE PRINTED IN COLOUR