

CONCRETE GRADE:

ALL FLOOR ELEMENTS :
 $f'_c = 40 \text{ MPa}$. U.N.O.

CONCRETE REO RATES:

POST TENSIONING REO RATE = 6 kg/m³
BAR REO RATE = 45 kg/m³

SLAB THICKNESS:

SLABS TO BE POST TENSIONED U.N.O.

250PT — SLAB THICKNESS AND REINFT. TYPE
PT = POST TENSIONED,
RC = TRADITIONAL RC

?? - N??/??/? — FORM WORK/MATERIAL
GRADE/REINFT. RATE/PT RATE

CONCRETE BEAMS:

BEAMS TO BE POST TENSIONED U.N.O.

??Dx????W-PT

?? - N??/??/?.? ← FORM WORK/MATERIAL
GRADE/REINFT. RATE/PT RATE

STEEL COMPOSITE BEAMS:

???UB??
 ?? - ??/?/? ← ROWS - SPACING/NO. OF
 STUDS/PRE-CAMBER (mm)

DENOTES STEEL BEAMS WHERE SHEAR STUDS ARE
 REQUIRED ALL STUDS TO BE 19mm DIAMETER SHEAR
 STUDS U.N.O.

STRUCTURAL LEGEND:

	LOAD BEARING RC OVER
	LOAD BEARING PRECAST OVER
	LOAD BEARING MASONRY OVER
	STEEL
	LOAD BEARING RC UNDER
	LOAD BEARING PRECAST UNDER
	LOAD BEARING MASONRY UNDER
	CORE WALL
	REINFORCED CONCRETE WALL
	MASONRY WALL
	PRECAST WALL

PENETRATIONS AND SETDOWNS

 FORMED PENETRATION. EXACT LOCATIONS & SIZES OF PENETRATIONS TO BE CONFIRMED/COORDINATION WITH SERVICES ENGINEER

 SETDOWN AREA
WET AREAS: **XXmm** MAX.
MINIMUM SLAB DEPTH **XXXmm**

STRUCTURAL STEPS, FOLDS & HOBS:
APPROPRIATE ALLOWANCES TO BE MADE FOR HOBS
AND FOLDS IN STRUCTURE TO
ACCOMMODATE ARCHITECTURAL SETDOWNS.

LIGHTWEIGHT FACADE ELEMENTS:

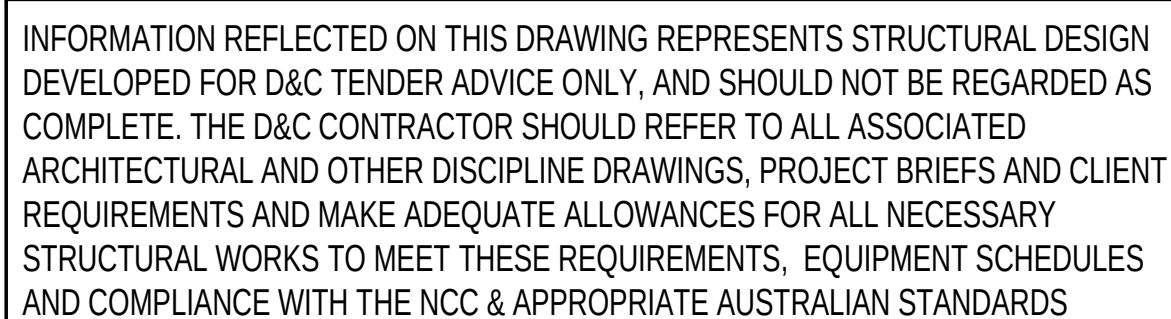
ALL FACADE ELEMENTS TO BE LIGHTWEIGHT
UNLESS NOTED OTHERWISE ON PLAN.
i.e.. NO ADDITIONAL NON LOAD BEARING PRECAST
OTHER THAN SHOWN AND CALLED UP ON PLAN.

R.C. WALLS / SHEAR WALLS:

REFER ARCHITECTS FOR WATERPROOFING AND DRAINAGE OF WET AREAS.

CRANE LOADING:

GANTRY CRANE OF 3.2T SWL IS SUPPORTED BY
 CRANE BEAMS DENOTED CB
 WHEEL LOADS ASSUMED:
 VERTICAL 40kN
 LATERAL 7.2kN
 BUFFER 40kN

[illegible]

<http://www.wsp.com>

CLIENT



THOMSON ADSETT + PEDDLE THORP

PROJECT

CQU ROCKHAMPTON TAFE
CONSOLIDATION - STAGE 2

BuildingName
LEVEL 01 - GENERAL ARRANGEMENT PLAN - SHEET
01

SCALE @ A1:

1:100

BM

DRAWN:

DG

TE:

DRAWING No:

92-ST-DR-L01-510-00-01

EV:

A

© WSP Australia Pty Ltd