


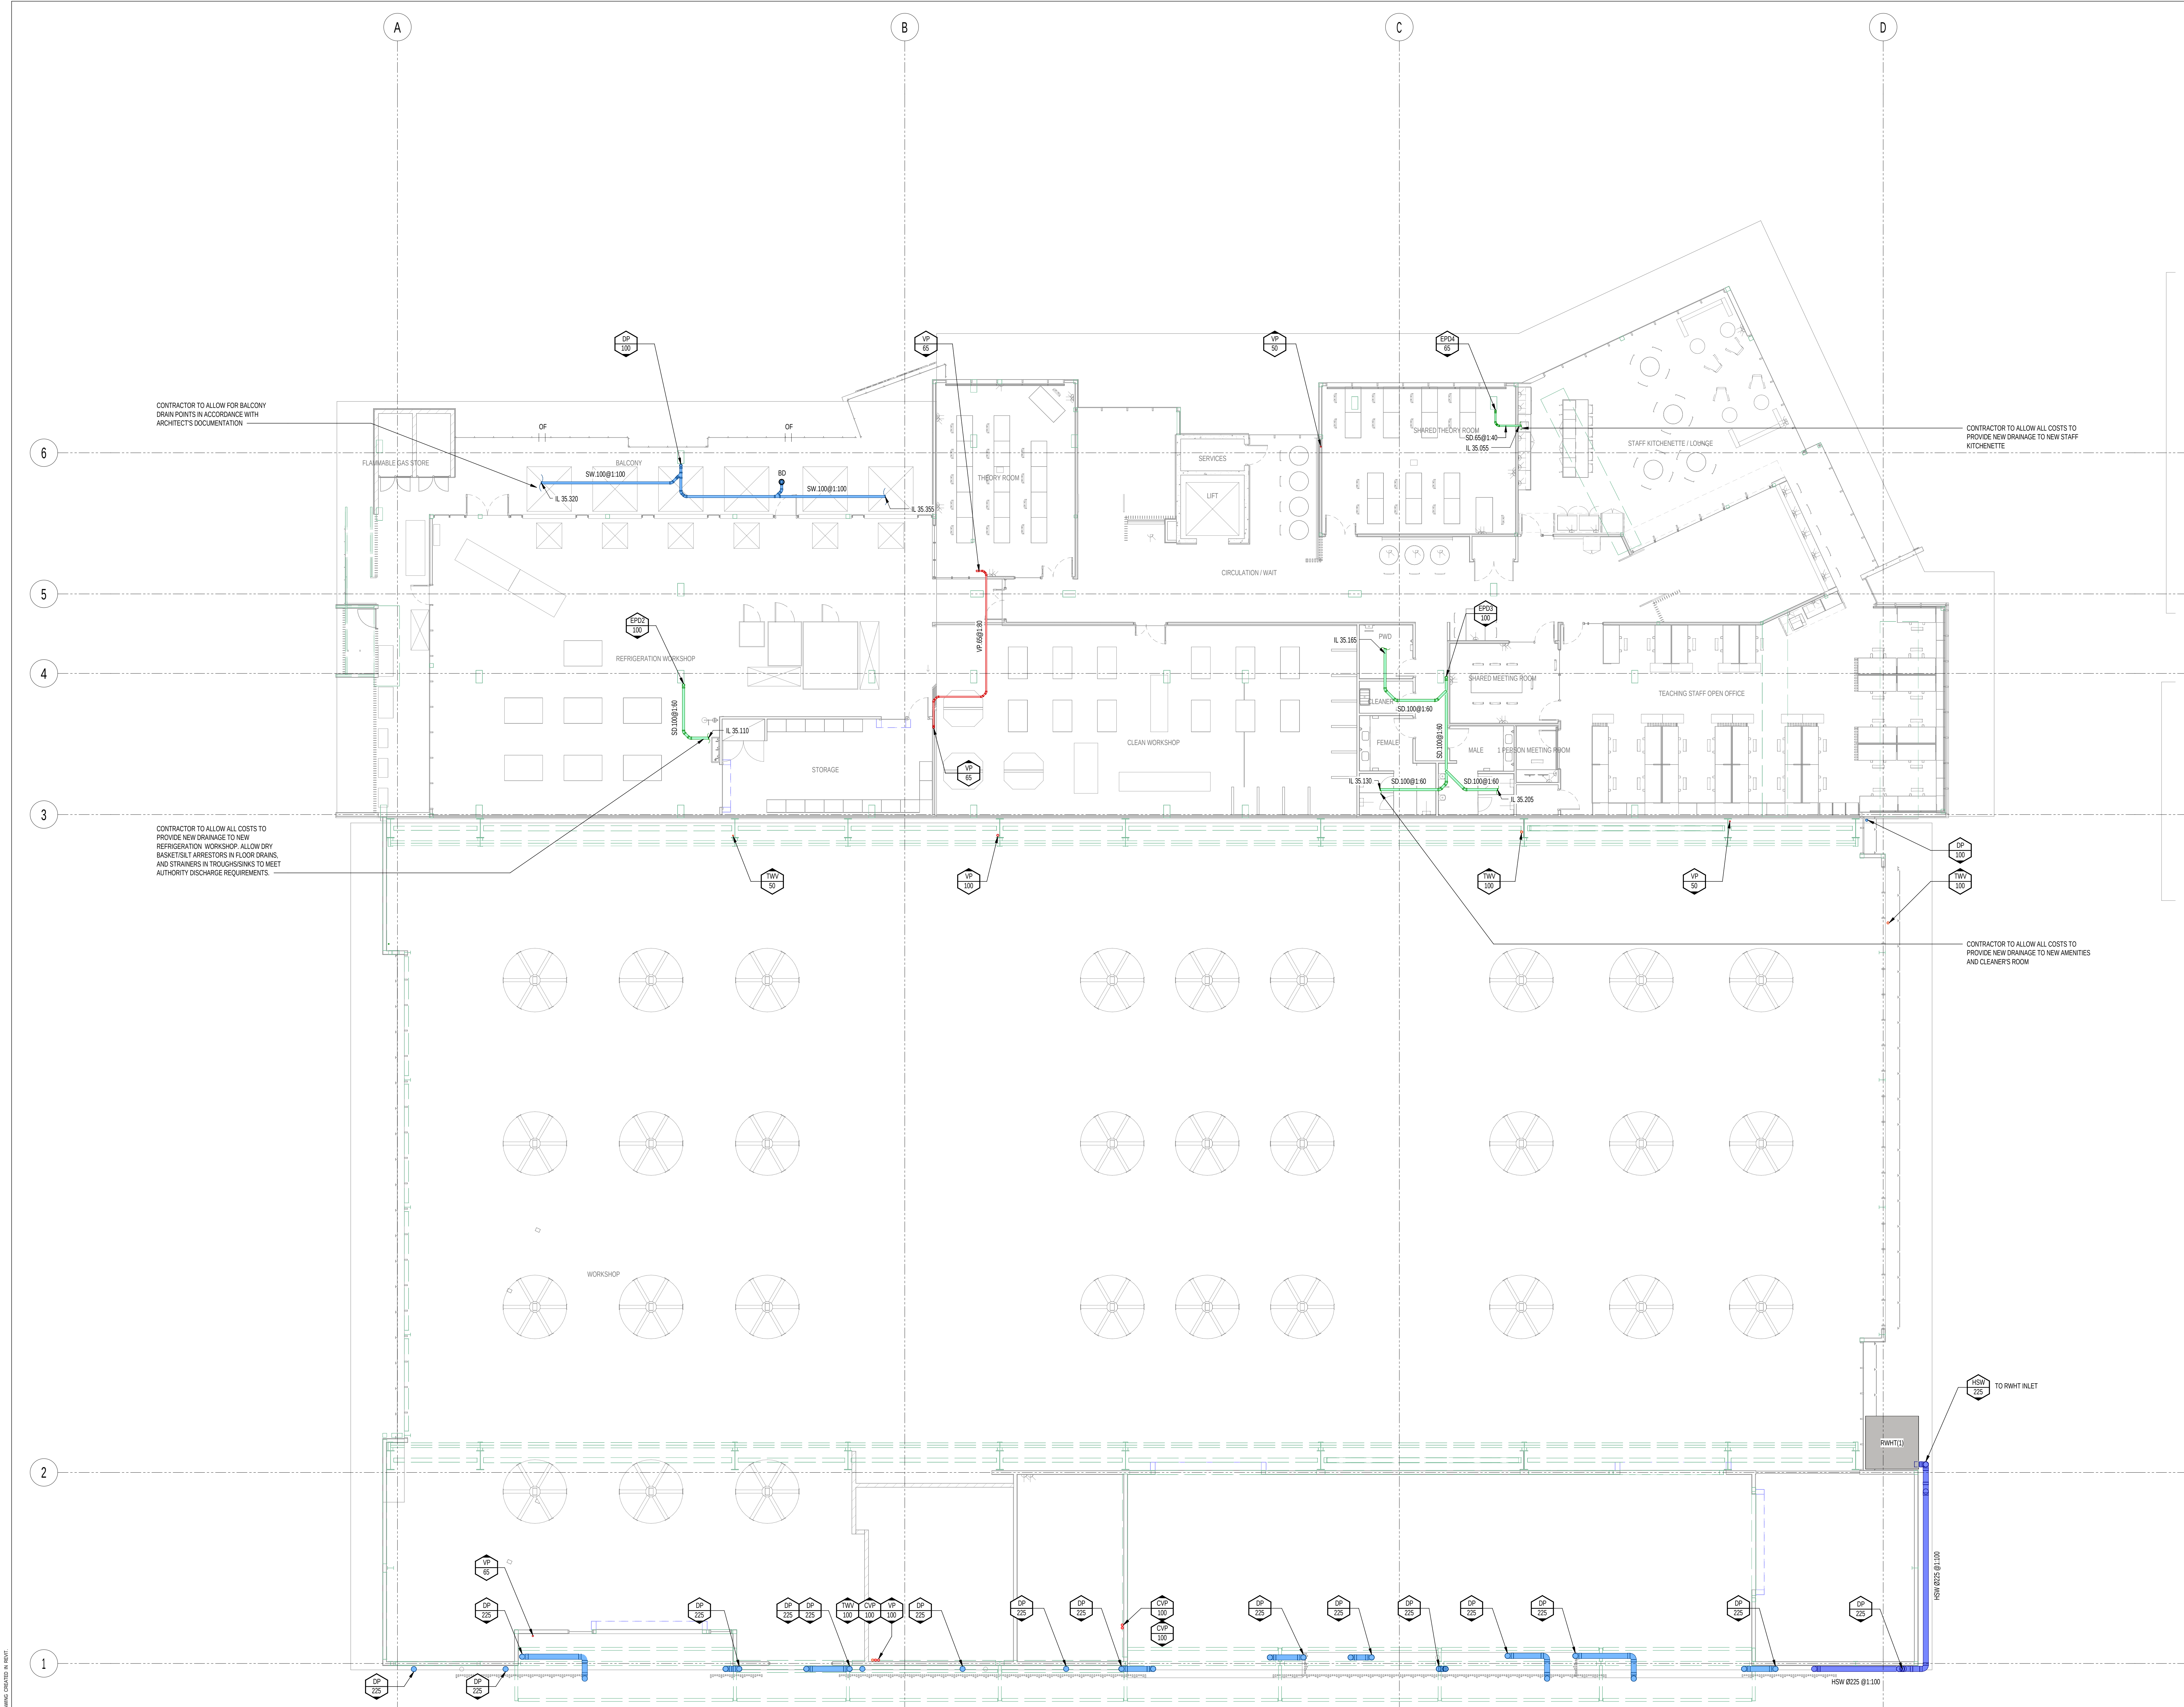

CONTRACTOR TO ALLOW FOR BALCONY DRAINPOINTS IN ACCORDANCE WITH ARCHITECT'S DOCUMENTATION

CONTRACTOR TO ALLOW ALL COSTS TO PROVIDE NEW DRAINAGE TO NEW STAFF KITCHENETTE

CONTRACTOR TO ALLOW ALL COSTS TO PROVIDE NEW DRAINAGE TO NEW REFRIGERATION WORKSHOP. ALLOW DRY BASKET/SILT ARRESTORS IN FLOOR DRAINS, AND STRAINERS IN TROUGH/SINKS TO MEET AUTHORITY DISCHARGE REQUIREMENTS.

CONTRACTOR TO ALLOW ALL COSTS TO PROVIDE NEW DRAINAGE TO NEW AMENITIES AND CLEANER'S ROOM

INFORMATION REFLECTED ON THIS DRAWING REPRESENTS HYDRAULIC SERVICES DESIGN DEVELOPED FOR D&C TENDER ADVISE ONLY, AND SHOULD NOT BE REGARDED AS COMPLETE. THE D&C CONTRACTOR SHOULD REFER TO ALL ASSOCIATED ARCHITECTURAL AND OTHER DISCIPLINE DRAWINGS, PROJECT BRIEFS AND CLIENT REQUIREMENTS AND MAKE ADEQUATE ALLOWANCES FOR ALL NECESSARY HYDRAULIC SERVICES WORKS TO MEET THESE REQUIREMENTS, EQUIPMENT SCHEDULES AND COMPLIANCE WITH THE NCC & APPROPRIATE AUSTRALIAN STANDARDS

1. DRAINAGE NOTES:

1. ALLOW ALL COSTS TO CONNECT SANITARY DRAINAGE TO ALL FIXTURES AS REQUIRED.
2. CO-ORDINATE ALL FLOOR WASTE LOCATIONS WITH ARCHITECT AND IN COMPLIANCE WITH THE NCC, AS/NZS3500.2, AS1428.1
3. ALLOW FOR PROVISION OF AN IOS IN COMPLIANCE WITH AS/NZS3500.2 AND TO ALLOW COMPLETE DRAIN ACCESS TO ALL DRAIN LINES COLLECTING MULTIPLE FIXTURES.
4. DOCUMENTATION MAY NOT INDICATE ALL VENTING REQUIREMENTS AND SHALL BE FINALISED DURING FURTHER DESIGN DEVELOPMENT. VENTING REQUIREMENTS TO BE IN ACCORDANCE WITH AS/NZS3500.2.
5. ALL PENETRATIONS OR CAST THROUGH CONCRETE STRUCTURE ARE TO BE APPROVED BY THE STRUCTURAL ENGINEER.
6. SERVICES PASSING THROUGH A FIRE RATED STRUCTURE SHALL HAVE FIRE COLLARS (OR OTHER APPROVED FIRE PROTECTION METHOD) RATED TO THE MINIMUM FRL OF THE STRUCTURE IT IS PENETRATING.
7. WHERE PLASTIC SLEEVES AND PIPEWORK PASS THROUGH STRUCTURE WHICH IS TO BE FIRE RATED, PROVIDE APPROVED FIRE COLLARS INSTALLED TO THE NCC CLASS AND THE MANUFACTURERS REQUIREMENTS TO ENSURE OPENINGS ARE COMPLETELY CLOSED IN THE EVENT OF A FIRE.
8. VERIFY THAT ALL MECHANICAL DISCHARGE TEMPERATURES DO NOT EXCEED THE MAXIMUM ASSOCIATED WITH THE PIPEWORK MATERIAL. MECHANICAL CONTRACTOR TO PROVIDE DRAIN TEMPERING VALVE PRIOR TO DISCHARGE AS REQUIRED.
9. CO-ORDINATE WITH ARCHITECT, AND PROVIDE THRESHOLD PROTECTION AT ALL ENTRY POINTS TO THE BUILDING AS REQUIRED TO PREVENT THE INGRESS OF WIND DRIVEN RAIN.
10. CONTRACTOR TO COORDINATE PROVISIONS WITH FINAL FLOOR LAYOUT PROVIDED BY ARCHITECT.

B	12.02.2026	SH	DESIGNED FOR D&C TENDER	AA	SM
A	12.02.2026	SH	DRAWN FOR D&C TENDER	AA	SM
REV	DATE	BY	DESCRIPTION	CHK	APP

DESIGN DEVELOPMENT



900 Ann Street, Level 12, Fortitude Valley 4006
Tel: +61-7-3854-6200 Fax: +61-7-3854-6500
<http://www.wsp.com>

CLIENT:

CQU

ARCHITECT:

THOMSON ADSETT / PEDDLE THORP

PROJECT:

CQU ROCKHAMPTON TAFE CONSOLIDATION

TITLE:

HYDRAULIC SERVICES
NEW TRADES BUILDING - LEVEL 01 - DRAINAGE
LAYOUT

SCALE @ A1:

1:100	DESIGNED	AA	APPROVED	SM
PROJECT NUMBER:	DRAWN	SH	DATE	JAN 2026

DRAWING NO:

NTB-HY-DR-510-L01-00-00

REV:

B

© WSP Australia Pty Ltd