


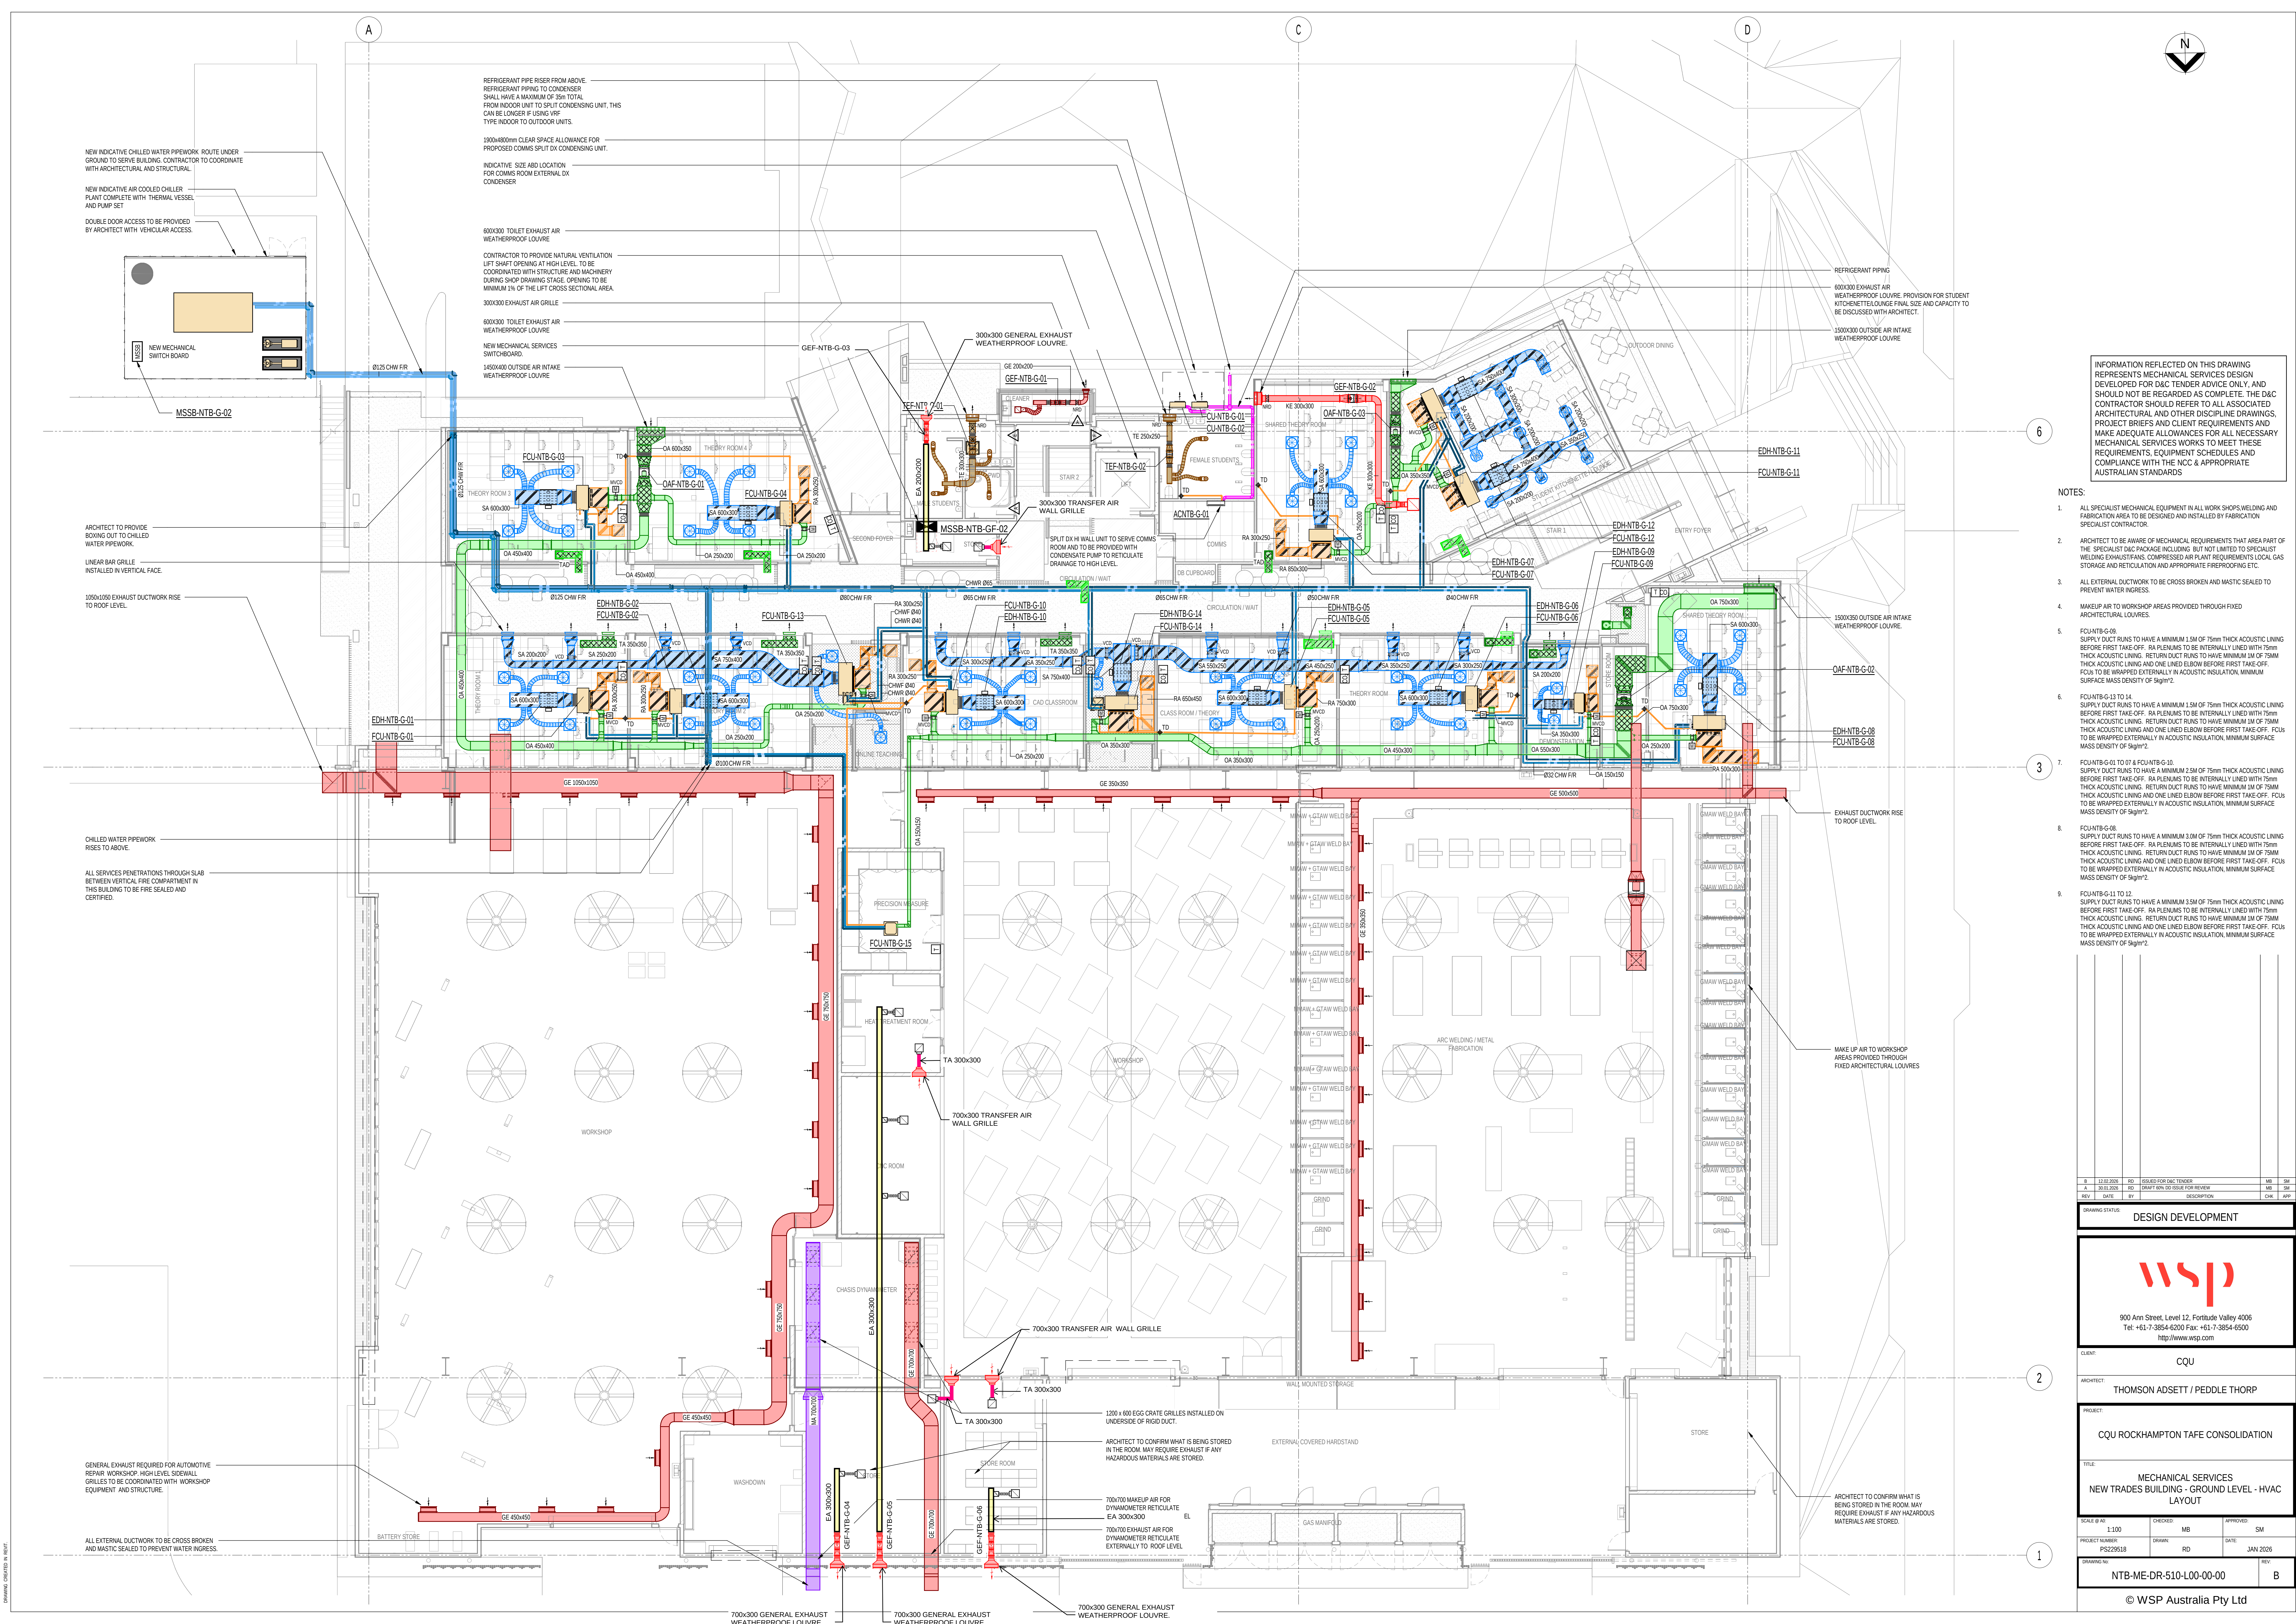

INFORMATION REFLECTED ON THIS DRAWING REPRESENTS MECHANICAL SERVICES DESIGN DEVELOPED FOR D&C TENDER ADVISE ONLY, AND SHOULD NOT BE REGARDED AS COMPLETE. THE D&C CONTRACTOR SHOULD REFER TO ALL ASSOCIATED ARCHITECTURAL AND OTHER DISCIPLINE DRAWINGS, PROJECT BRIEFS AND CLIENT REQUIREMENTS AND MAKE ADEQUATE ALLOWANCES FOR ALL NECESSARY MECHANICAL SERVICES WORKS TO MEET THESE REQUIREMENTS, EQUIPMENT SCHEDULES AND COMPLIANCE WITH THE NCC & APPROPRIATE AUSTRALIAN STANDARDS

NOTES:

1. ALL SPECIALIST MECHANICAL EQUIPMENT IN ALL WORKSHOPS, WELDING AND FABRICATION AREA TO BE DESIGNED AND INSTALLED BY FABRICATION SPECIALIST CONTRACTOR.
2. ARCHITECT TO BE AWARE OF MECHANICAL REQUIREMENTS THAT AREA PART OF THE SPECIALIST D&C PACKAGE INCLUDING BUT NOT LIMITED TO SPECIALIST WELDING EXHAUSTS, COMPRESSED AIR PLANT REQUIREMENTS LOCAL GAS STORAGE AND RETICULATION AND APPROPRIATE FIREPROOFING ETC.
3. ALL EXTERNAL DUCTWORK TO BE CROSS BROKEN AND MASTIC SEALED TO PREVENT WATER INGRESS.
4. MAKEUP AIR TO WORKSHOP AREAS PROVIDED THROUGH FIXED ARCHITECTURAL LOUVERS.
5. FOU-NTB-G-09: SUPPLY DUCT RUNS TO HAVE A MINIMUM 1.5M OF 75mm THICK ACOUSTIC LINING BEFORE FIRST TAKE-OFF. RA PLENUMS TO BE INTERNALLY LINED WITH 75mm THICK ACOUSTIC LINING. RETURN DUCT RUNS TO HAVE MINIMUM 1M OF 75mm THICK ACOUSTIC LINING AND ONE LINED ELBOW BEFORE FIRST TAKE-OFF. FCUs TO BE WRAPPED EXTERNALLY IN ACOUSTIC INSULATION, MINIMUM SURFACE MASS DENSITY OF 5kg/m².
6. FOU-NTB-G-13 TO 14: SUPPLY DUCT RUNS TO HAVE A MINIMUM 1.5M OF 75mm THICK ACOUSTIC LINING BEFORE FIRST TAKE-OFF. RA PLENUMS TO BE INTERNALLY LINED WITH 75mm THICK ACOUSTIC LINING. RETURN DUCT RUNS TO HAVE MINIMUM 1M OF 75mm THICK ACOUSTIC LINING AND ONE LINED ELBOW BEFORE FIRST TAKE-OFF. FCUs TO BE WRAPPED EXTERNALLY IN ACOUSTIC INSULATION, MINIMUM SURFACE MASS DENSITY OF 5kg/m².
7. FOU-NTB-G-01 TO 07 & FOU-NTB-G-10: SUPPLY DUCT RUNS TO HAVE A MINIMUM 2.5M OF 75mm THICK ACOUSTIC LINING BEFORE FIRST TAKE-OFF. RA PLENUMS TO BE INTERNALLY LINED WITH 75mm THICK ACOUSTIC LINING. RETURN DUCT RUNS TO HAVE MINIMUM 1M OF 75mm THICK ACOUSTIC LINING AND ONE LINED ELBOW BEFORE FIRST TAKE-OFF. FCUs TO BE WRAPPED EXTERNALLY IN ACOUSTIC INSULATION, MINIMUM SURFACE MASS DENSITY OF 5kg/m².
8. FOU-NTB-G-08: SUPPLY DUCT RUNS TO HAVE A MINIMUM 3.0M OF 75mm THICK ACOUSTIC LINING BEFORE FIRST TAKE-OFF. RA PLENUMS TO BE INTERNALLY LINED WITH 75mm THICK ACOUSTIC LINING. RETURN DUCT RUNS TO HAVE MINIMUM 1M OF 75mm THICK ACOUSTIC LINING AND ONE LINED ELBOW BEFORE FIRST TAKE-OFF. FCUs TO BE WRAPPED EXTERNALLY IN ACOUSTIC INSULATION, MINIMUM SURFACE MASS DENSITY OF 5kg/m².
9. FOU-NTB-G-11 TO 12: SUPPLY DUCT RUNS TO HAVE A MINIMUM 3.5M OF 75mm THICK ACOUSTIC LINING BEFORE FIRST TAKE-OFF. RA PLENUMS TO BE INTERNALLY LINED WITH 75mm THICK ACOUSTIC LINING. RETURN DUCT RUNS TO HAVE MINIMUM 1M OF 75mm THICK ACOUSTIC LINING AND ONE LINED ELBOW BEFORE FIRST TAKE-OFF. FCUs TO BE WRAPPED EXTERNALLY IN ACOUSTIC INSULATION, MINIMUM SURFACE MASS DENSITY OF 5kg/m².

B	12.02.2026	RD	DESIGNED FOR D&C TENDER	MB	SM
A	12.02.2026	RD	DESIGNED FOR D&C TENDER	MB	SM
REV	DATE	BY	DESCRIPTION	CHK	APP

DESIGN DEVELOPMENT



900 Ann Street, Level 12, Fortitude Valley 4006
Tel: +61-7-3854-6200 Fax: +61-7-3854-6500
<http://www.wsp.com>

CLIENT:

CQU

ARCHITECT:

THOMSON ADSETT / PEDDLE THORP

PROJECT:

CQU ROCKHAMPTON TAFE CONSOLIDATION

TITLE:

MECHANICAL SERVICES
NEW TRADES BUILDING - GROUND LEVEL - HVAC
LAYOUT

SCALE @ 1/100

PROJECT NUMBER:	PS229518	DRAWN:	RD	DATE:	JAN 2026
DRAWING NO:	NTB-ME-DR-510-L00-00-00	REV:			

© WSP Australia Pty Ltd