


A

C

D



REFRIGERANT PIPE RISER TO BELOW.
REFRIGERANT PIPING TO CONDENSER
SHALL HAVE A MAXIMUM OF 30m TOTAL
FROM INDOOR UNIT TO SPLIT CONDENSING
UNIT. THIS CAN BE LONGER USING VRF
TYPE INDOOR TO OUTDOOR UNITS.


600X300 EXHAUST AIR WEATHERPROOF LOUVER
PROVISION FOR STAFF KITCHENETTE LOUNGE

700X350 TOILET EXHAUST AIR
WEATHERPROOF LOUVER

1500X500 OUTSIDE AIR INTAKE
WEATHERPROOF LOUVER

1500X500 OUTSIDE AIR INTAKE
WEATHERPROOF LOUVER

6

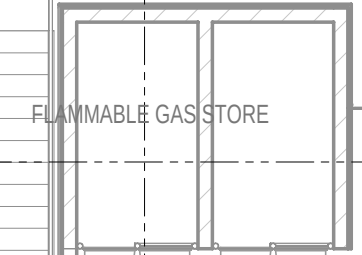

ANY SPECIALIST VENTILATION REQUIREMENTS OR
GAS DETECTION TO BE DESIGNED BY CONTRACTOR
IN ACCORDANCE WITH AS5346.1

3

1050X1350 EXHAUST AIR DUCT
FROM BELOW RISE TO ABOVE.

CHILLED WATER PIPEWORK
RISES FROM BELOW (CHW FR).

2

700X700 DYNAMOMETER GENERAL EXHAUST AIR
RISER FROM BELOW TO ABOVE.

700X700 DYNAMOMETER MAKEUP AIR
RISER FROM ABOVE TO BELOW.

1

WORKSHOP

FOU-NTB-L1-07
EDH-NTB-L1-07
FOU-NTB-L1-08
EDH-NTB-L1-08

EDH-NTB-L1-02
FOU-NTB-L1-02

FOU-NTB-L1-01
EDH-NTB-L1-01

850X350 OUTSIDE AIR INTAKE
WEATHERPROOF LOUVER

OAF-NTB-L1-03
GEF-NTB-L1-03

EDH-NTB-L1-03
FOU-NTB-L1-03

FOU-NTB-L1-06
EDH-NTB-L1-06

FOU-NTB-L1-05
EDH-NTB-L1-05

FOU-NTB-L1-06
EDH-NTB-L1-06

OAF-NTB-L1-04

FOU-NTB-L1-04
EDH-NTB-L1-04

700X350 OUTSIDE AIR INTAKE
WEATHERPROOF LOUVER

500X600 EXHAUST AIR DUCT FROM
BELOW RISE TO ABOVE.

LOCATION OF CONDENSING UNIT TO BE
COORDINATED WITH ARCHITECT.

INFORMATION REFLECTED ON THIS DRAWING
REPRESENTS MECHANICAL SERVICES DESIGN
DEVELOPED FOR D&C TENDER ADVISE ONLY, AND
SHOULD NOT BE REGARDED AS COMPLETE. THE D&C
CONTRACTOR SHOULD REFER TO ALL ASSOCIATED
ARCHITECTURAL AND OTHER DISCIPLINE DRAWINGS,
PROJECT BRIEFS AND CLIENT REQUIREMENTS AND
MAKE ADEQUATE ALLOWANCES FOR ALL NECESSARY
MECHANICAL SERVICES WORKS TO MEET THESE
REQUIREMENTS, EQUIPMENT SCHEDULES AND
COMPLIANCE WITH THE NCC & APPROPRIATE
AUSTRALIAN STANDARDS

NOTES:

- ALL SERVICES PENETRATIONS THROUGH SLAB BETWEEN VERTICAL
FIRE COMPARTMENTATION IN THIS BUILDING TO BE FIRE SEALED AND
CERTIFIED.
- FOU-NTB-L1-04
SUPPLY DUCT RUNS TO HAVE A MINIMUM 1.5M OF 75mm THICK
ACOUSTIC LINING BEFORE FIRST TAKE-OFF. RA PLENUMS TO BE
INTERIALLY LINED WITH 75mm THICK ACOUSTIC LINING. RETURN
DUCT RUNS TO HAVE MINIMUM 3M OF 75mm THICK ACOUSTIC LINING
AND ONE LINED ELBOW BEFORE FIRST TAKE-OFF. FOU TO BE
WRAPPED EXTERNALLY IN ACOUSTIC INSULATION, MINIMUM SURFACE
MASS DENSITY OF 50kg/m².
- FOU-NTB-L1-05 TO 06 & FOU-NTB-L1-09 TO 10
SUPPLY DUCT RUNS TO HAVE A MINIMUM 2.5M OF 75mm THICK
ACOUSTIC LINING BEFORE FIRST TAKE-OFF. RA PLENUMS TO BE
INTERIALLY LINED WITH 75mm THICK ACOUSTIC LINING. RETURN
DUCT RUNS TO HAVE MINIMUM 3M OF 75mm THICK ACOUSTIC LINING
AND ONE LINED ELBOW BEFORE FIRST TAKE-OFF. FOU TO BE
WRAPPED EXTERNALLY IN ACOUSTIC INSULATION, MINIMUM SURFACE
MASS DENSITY OF 50kg/m².
- FOU-NTB-L1-05 TO 08
SUPPLY DUCT RUNS TO HAVE A MINIMUM 3.5M OF 75mm THICK
ACOUSTIC LINING BEFORE FIRST TAKE-OFF. RA PLENUMS TO BE
INTERIALLY LINED WITH 75mm THICK ACOUSTIC LINING. RETURN
DUCT RUNS TO HAVE MINIMUM 3M OF 75mm THICK ACOUSTIC LINING
AND ONE LINED ELBOW BEFORE FIRST TAKE-OFF. FOU TO BE
WRAPPED EXTERNALLY IN ACOUSTIC INSULATION, MINIMUM SURFACE
MASS DENSITY OF 50kg/m².

B	12.02.2026	RD	ISSUED FOR D&C TENDER	MB	SM
A	18.02.2026	RD	DRAWING FOR REVIEW	MB	SM
REV	DATE	BY	DESCRIPTION	CHK	APP

DRAWING STATUS: DESIGN DEVELOPMENT



900 Ann Street, Level 12, Fortitude Valley 4006
Tel: +61-7-3854-6200 Fax: +61-7-3854-6500
http://www.wsp.com

CLIENT: CQU

ARCHITECT: THOMSON ADSETT / PEDDLE THORP

PROJECT: CQU ROCKHAMPTON TAFE CONSOLIDATION

TITLE: MECHANICAL SERVICES
NEW TRADES BUILDING - LEVEL 01 - HVAC LAYOUT

SCALE @ A1	1:100	CHECKED	MB	APPROVED	SM
PROJECT NUMBER	PS229518	DRAWN	RD	DATE	FEB 2026

DRAWING NO: NTB-ME-DR-510-L01-00-00

B

© WSP Australia Pty Ltd