

CQU ROCKHAMPTON TAFE CONSOLIDATION - STAGE 2

ROCKHAMPTON, QUEENSLAND



A	12/02/26	ISSUED FOR TENDER	BS
1	30/01/26	DRAFT 60% ISSUE	BS
rev	date	details	init.

drawn	date
BS	30/01/26
checked	date
BS	30/01/26
verified	date
BS	30/01/26

scale

ROOM LAYOUT - REFURBISHED SHED

scale	project no.
1 : 50 @ A1	260018
revision	
A	
sheet no.	


CQU-ROK-21A-G-ARC-60-001

original sheet size - A1 (594mm x 841mm)

ISSUED FOR TENDER



12/02/2026 3:52:51 PM Autodesk Docs://CQU ROK TAFE/260018_A_CQU-UNIVERSITY_SITE_R25.rvt

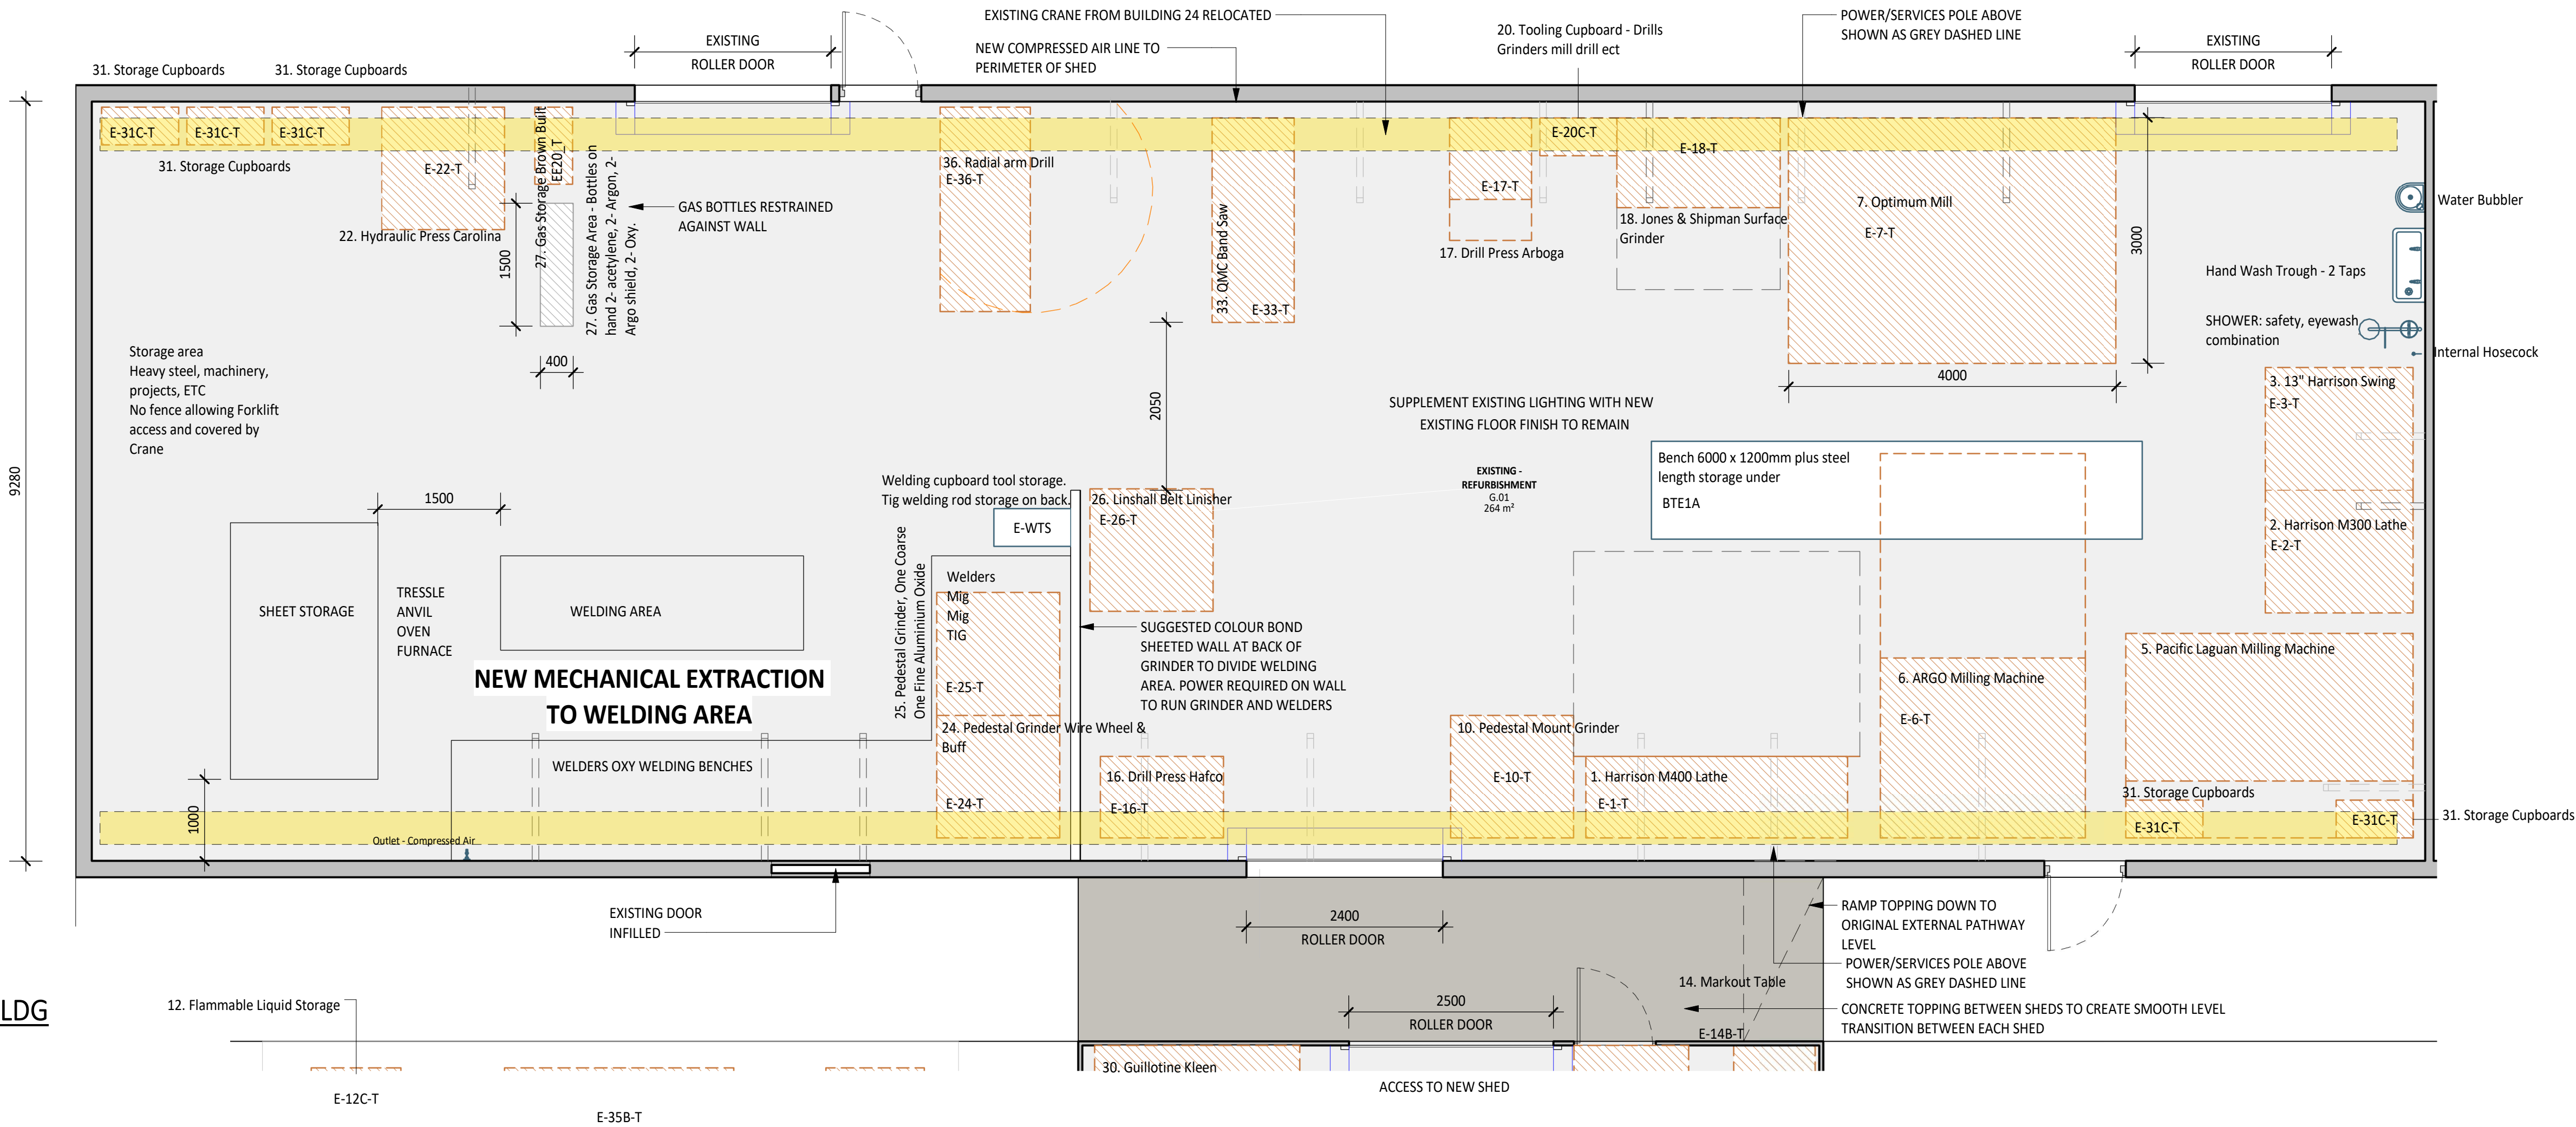

1 ENGINEERING BLDG

1 : 50

40-LEGEND FFE - ENGINEERING DEPARTMENT - G.01 - REFURBISHMENT					
Code	Type Comments	Group	Count	Description	
CA		1	1	Outlet - Compressed Air	
E-1-T	1. Harrison M400 Lathe	2T	1	Transfer - Weight 2159kg - Width 1000mm Length 3200mm - Working Area 3500mm x 2500mm - Do not block spindle end. Leave access all round for student groups to observe demonstrations. Tooling storage and work bench Additional to working area 2400mm x 1000mm - Lift with sling under casting of base and 30mm bar under headstock end- Power- 3 phase 415 volts 20 amp plus single 10-amp outlet for digital read out Option? read out be wired into machine. Compressed Air outlet required	
E-2-T	2. Harrison M300 Lathe	2T	1	Transfer - Area 1800mm x1500mm deep - Possible eye bolt in bed casting - Shared workbench with M300 lathe - Power -3 phase 10amp plus 10-amp outlet for work light - Lift to be determined	
E-3-T	3. 13" Harrison Swing	2T	1	Transfer - Lift with bars through base casting - Working Area 1800mm x 1500mm - Additional Tooling kept in CNC work bench - Power -3 phase 440 x 10amp	
E-5-T	5. Pacific Lagan Milling Machine	2T	1	Transfer - Net weight 2850kg - Lifting eye on top - Floor space 1800mm Deep plus standing area total 2500mm - Width 3500mm - Tooling Cupboard (460mm X 940mm) Tooling Trolley 800mm X 700mm) Vice, Dividing head at height Safety concern Manual handling of equipment. Power – 3 phase plus double 10amp single phase outlet for read outs and vacuum - Compressed air outlet nearby	
E-6-T	6. ARGO Milling Machine	2T	1	Transfer - Weight 2200 LBS 1000kg - Floor space 2200mm x 2500mm wide - Working area 2500mm x 2500mm - Tooling Cupboard (460mm X 940mm) - Lift under Ram as indicated sheet 3 - Table against column Ram 1 inch from rear as indicated - Drum switch and HI low levers in Neutral - Power – 3 phase plus double 10amp single phase outlet for read outs and vacuum - Compressed Air outlet nearby	
E-7-T	7. Optimum Mill	2T	1	Transfer - CNC controlled - Weight 2000kg - Floor space 2000mm x2000mm - Working area 4000mm wide 3000mm deep - Work bench Tooling Storage (1100mm X 900mm) - Remove coolant tank and lift on pellet jack or fork lift no lifting points are available - Restrain counterweight and support head. Secure doors. - Power – 3 phase plus double 10amp single phase outlet for oil skimmer and vacuum Compressed Air Required (Must have line that will not hold water)	
E-10-T	10. Pedestal Mount Grinder	2T	1	1500mm X 1500mm - 10amp outlet required - Transfer	
E-16-T	16. Drill Press Hafco	2T	1	3 phase 20amp - 1000mm wide x 1500mm deep - Transfer	
E-17-T	17. Drill Press Arboga	2T	1	1000mm x1000mm - 3 Phase 20amp - Transfer	
E-18-T	18. Jones & Shipman Surface Grinder	2T	1	Transfer - Lift via lift points - Weight 800kg - Floor space 1100mm x 2000mm - Working area 2000mm x 2000mm - Power – 3 phase 20amp plug	
E-20C-T	20. Tooling Cupboard - Drills Grinders mill drill ect	2T	1	Transfer - Drills Grinders mill drill - Brown Built 940mm x 460mm	
E-22-T	22. Hydraulic Press Carolina	2T	1	1500mm wide x 1500mm deep - Transfer	
E-24-T	24. Pedestal Grinder Wire Wheel & Buff	2T	1	Wire wheel and buff - 1500mm x 1500mm - Single Phase unit - Transfer	
E-25-T	25. Pedestal Grinder, One Coarse One Fine Aluminium Oxide	2T	1	One Coarse one fine Aluminium Oxide 1500mm x 1500mm - Transfer	
E-26-T	26. Linshall Belt Linisher	2T	1	1500mm x1500mm - 3 phase hard wired - Transfer	
EE20_T	27. Gas Storage Brown Built	2T	1	Transfer - Gas Storage Area - Brown Built 940mm x 460mm - general storage of equipment	
E-31C-T	31. Storage Cupboards	2T	5	Transfer - Storage of small acrylic plastics, mesh and off cuts kept for small jobs and student projects. Welding and general tooling - Plumbing fittings - Wood working tooling and ring roller machine. Brown Built 940mm x 460mm	
E-33-T	33. QMC Band Saw	2T	1	Transfer - Locate with metal storage - Floor space 1000mm X 2500mm - 4 meters clearance on RHS + 8 meters on LHS - Lift with fork lift or pellet jack - Power – 3phase hard wired Power is located under ground	
E-36-T	36. Radial arm Drill	2T	1	Floor space 2500mm x 1100mm - Working area 1.5meter radius - Currently 3 phase hardwired	
BTE1A	Bench 6000 x 1200mm plus steel length storage under	1	1	Bench 6000 x 1200mm plus steel length storage under	
BN11D	Hand Wash Trough - 2 Taps	1	1	Hand Wash Trough - 2 Taps	
TW3A	Internal Hosecock	1	1	Internal Hosecock	
SR1A	SHOWER: safety, eyewash combination	1	1	Eyewash - Emergency Wash With Eye Wash	
HY6A	Water Bubbler	1	1	Water Bubbler	
E-WTS	Welding cupboard tool storage. Tig welding rod storage on back.	1	1	Transfer - Drills Grinders mill drill - Brown Built 940mm x 460mm	

40-LEGEND FFE - ENGINEERING DEPARTMENT - NEW SHED					
Code	Type Comments	Group	Count	Description	
CF1A		1	2	Ceiling Fan - Powerfoil D, 6 Aluminum Airfoils	
CA		1	3	Outlet - Compressed Air	
E-8-T	8. Record Band Saw	2T	1	Transfer - Lifting eye provided on top - Floor space 1000kg X 1000kg - Additional Tooling Draw set 500mm X 600mm - Working area 2000mm x 2000mm - Power – 3phase hard wired	
E-9-T	9. Clarkson Tool & Cutter Grinder	2T	1	Transfer - Floor space 1x1.5meter - Additional tooling Draw set 500mm X 600mm - Power -3 phase plus single for light	
E-14B-T	14. Markout Table	2T	1	Transfer - 1000x1000	
E-19-T	19. Macson Surface Grinder	2T	1	Transfer - Floor space 1100mm x 1400mm - Bench mounted easily moved	
E-21-T	21. Shan Dong Mill Drill	2T	1	Transfer - Working area 1500mm X 1500mm - Single phase 10 amp	
E-29-T	29. Brake Press Bramley	2T	1	2500mm x 2500mm - Transfer	
E-30-T	30. Guillotine Kleen	2T	1	Transfer - 2500mm x 2500mm	
E-BSTR-T	Bench from Store Room	2T	1	Transfer - 2x	
SF1A	Storage Shelving	1	1	Shelf - Stainless Steel	
E-CSTR-T	Tooling Cupboard From Store Room	2T	6	Tooling Cupboard 6 of 3 wide back to back from store room	

NOTE: LAYOUT OF SHED BASED OFF AS BUILT DRAWINGS PROVIDED BY CLIENT. CONTRACTOR TO ALLOW FOR SITE VISIT TO ASSESS CURRENT CONDITION AND LAYOUT OF SHED BEFORE CONSTRUCTION DOCUMENTATION / CONSULTANT COORDINATION PHASE

ROOM LAYOUT SHEET NOTES

- ALL ARCHITECTURAL DRAWINGS TO BE READ IN CONJUNCTION WITH OTHER DISCIPLINES.
- REFER TO FF&E, SANITARYWARE SCHEDULES FOR ALL FURNITURE, FIXTURES, AND EQUIPMENT.
- REFER TO ENGINEER'S DRAWINGS FOR DETAILS ON FIRE EXTINGUISHERS AND FIRE BLANKETS
- REFER TO ELECTRICAL DOCUMENTATION FOR OUTLET DETAILS (ie. POWER, DATA, COMMS etc.)
- REFER TO AUDIO VISUAL DOCUMENTATION (VideoPro) FOR AV REQUIREMENTS AND DETAILS.
- AV SUPPLIER TO CONFIRM EXACT POSITIONS OF EQUIPMENT ON SITE
- ALL FF&E ITEMS ARE TO BE READ IN CONJUNCTION WITH FF&E SCHEDULES AND CQU DESIGN MANUAL.
- ALL FF&E AND TRANSFER ITEMS TO BE CONFIRMED BY THE CLIENT.
- PROVIDE ALLOWANCE AND ADD SUPPORT TO WALLS, WHERE FITTINGS ARE WALL MOUNTED. THIS INCLUDES BUT NOT LIMITED TO HANDBASINS, HANDRAILS, SCREENS, PROJECTORS, etc.
- SPECIALISED EQUIPMENT ARE SUPPLIED BY CLIENT AND INSTALLED BY THE BUILDER-CONTRACTOR.
- FF&E COUNT IS FOR INFORMATION ONLY. THE TOTAL NUMBER OF FF&E ITEMS ARE TO BE CONFIRMED WITH CLIENT AND ARCHITECTS BEFORE PURCHASE OF ITEMS.
- CONFIRM ALL DIMENSIONS ON SITE FOR JOINERY ITEMS.
- REFER TO EQUIPMENT AUDIT SPREADSHEET FOR DETAILS OF TRANSFER EQUIPMENT
- CONTRACTOR RESPONSIBLE FOR ALL TRANSFER INCLUDING DISCONNECTION, RECONNECTION, AND INSTALLATION OF TRANSFER EQUIPMENT
- POWER AND DATA POINTS SHOWN ON THE ROOM LAYOUT SHEETS WERE SHOWN AND DISCUSSED DURING USER GROUP BRIEFING. THESE RELATE TO PARTICULAR EQUIPMENT THAT WAS DISCUSSED AS REQUIRING POWER AND DATA. THESE REFLECT STAKEHOLDER EXPECTATIONS FOR SPECIFIC POWER AND DATA POINTS AND HAVE REMAINED IN THE DOCUMENTATION AS A USEFUL REFERENCE FOR THE CONTRACTOR. THESE ARE NOT A COMPLETE QUANTITY AND SPECIFICATION OF POWER AND DATA. THE CONTRACTOR IS TO REFER TO ELECTRICAL ENGINEER'S DOCUMENTATION FOR ALLOWANCE. REFER TO ELECTRICAL DOCUMENTATION FOR AMPS AND 3 PHASE POWER REQUIREMENTS. REFER TO AUDIO VISUAL (VIDEOPRO) DOCUMENTATION FOR ADDITIONAL POWER AND DATA REQUIREMENTS
- ALLOW FOR STRUCTURAL PLY BACKING BEHIND PLASTERBOARD FOR FULL EXTENT OF WALLS WITH MOUNTED AUDIO VISUAL EQUIPMENT. REFER TO AUDIO VISUAL (VIDEOPRO) DOCUMENTATION FOR LOCATIONS OF WALL MOUNTED EQUIPMENT.
- CONTRACTOR TO ALLOW FOR DESIGN AND INSTALLATION OF COMPRESSED AIR TO AREAS NOTED ON ROOM LAYOUTS AND TO ALL EQUIPMENT REQUIRING.

ROOM LAYOUT SHEET LEGEND

- GROUP 1 ITEMS - PROVIDED & FITTED UNDER CONTRACT
- GROUP 2 ITEMS - PROVIDED BY CLIENT & FITTED UNDER CONTRACT
- GROUP 2T ITEMS - EXISTING EQUIPMENT - RELOCATED & FITTED UNDER CONTRACT
- GROUP 3 ITEMS - PROVIDED & INSTALLED BY CLIENT

PLANS TO BE PRINTED IN COLOUR