INFORMATION REFLECTED ON THIS DRAWING REPRESENTS HYDRAULIC SERVICES DESIGN DEVELOPED FOR D&C TENDER ADVICE ONLY, AND SHOULD NOT BE REGARDED AS COMPLETE. THE D&C CONTRACTOR SHOULD REFER TO ALL ASSOCIATED ARCHITECTURAL AND OTHER DISCIPLINE DRAWINGS, PROJECT BRIEFS AND CLIENT REQUIREMENTS AND MAKE ADEQUATE ALLOWANCES FOR ALL NECESSARY HYDRAULIC SERVICES WORKS TO MEET THESE REQUIREMENTS, EQUIPMENT SCHEDULES AND COMPLIANCE WITH THE NCC & APPROPRIATE AUSTRALIAN STANDARDS

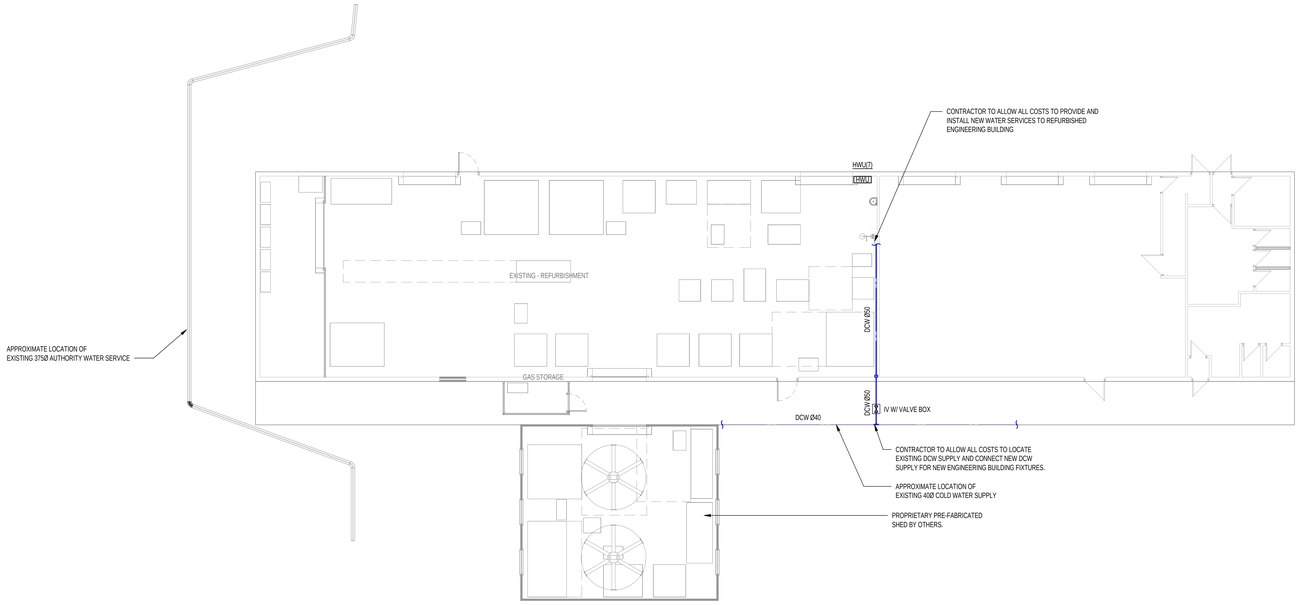

EXISTING SERVICES

SERVICES SHOWN AS EXISTING HAVE BEEN INTERPOLATED FROM RECORD DRAWINGS. CONTRACTOR TO VERIFY LOCATIONS AND LEVELS PRIOR TO COMMENCEMENT OF WORK.

WATER NOTES:

1. ALLOW ALL COSTS TO RETICULATE ALL HOT AND COLD WATER FROM AREA ISOLATION OR TMV TO FIXTURES WITHIN THE ROOM.
2. ALL FIXTURES ARE TO HAVE MINI ISOLATION VALVES AT POINT OF CONNECTION FOR TAPWARE WITH FLEXIBLE HOSES, OR ARE TO BE ISOLATED BY MEANS OF ISOLATING ONLY THE ROOM INDEPENDENTLY FROM THE REMAINDER OF THE BUILDING.
3. PROVIDE PRESSURE REDUCTION AS REQUIRED TO ENSURE THAT ALL FIXTURES HAVE A PRESSURE WITHIN THE MAXIMUM AND MINIMUM ALLOWABLE PRESSURES SPECIFIED IN THE SPECIFICATION. ALL PRESSURE REDUCTION ON MAIN LINES SHALL HAVE N+1 REDUNDANCY (INSTALLED IN PARALLEL) WITH UPSTREAM AND DOWNSTREAM ISOLATION OF EACH VALVE.
4. DOCUMENTATION MAY NOT INDICATE ALL LOCATIONS OF REQUIRED VALVING. FINAL REQUIREMENTS TO BE DOCUMENTED IN FURTHER DESIGN DEVELOPMENT.
5. WHERE REQUIRED PROVIDE CEILING ACCESS PANELS TO MAINTAIN ACCESS TO ALL VALVING, METERS, TMV'S ETC.
6. PROVIDE BACKFLOW PREVENTION DEVICES AS REQUIRED TO ENSURE THAT ZONE PROTECTION IS RETAINED IN ACCORDANCE WITH AS/NZS3500.1 AND LOCAL AUTHORITY REQUIREMENTS.
7. CONTRACTOR TO REFER TO STRUCTURAL DRAWINGS BEFORE CONCRETE CUTTING. ALLOW ALL COSTS FOR CUTTING AND REINSTATEMENT AS REQUIRED
8. CONTRACTOR TO COORDINATE PROVISIONS WITH FINAL FF&E LAYOUT PROVIDED BY ARCHITECT.

REV	DATE	BY	DESCRIPTION	CHK	APP
B	12.02.2026	SH	ISSUED FOR D&C TENDER	AA	SM
A	30.01.2026	SH	DRAFT 60% DD ISSUE FOR REVIEW	AA	SM

DRAWING STATUS: DESIGN DEVELOPMENT

900 Ann Street, Level 12, Fortitude Valley 4006
Tel: +61-7-3854-6200 Fax: +61-7-3854-6500
http://www.wsp.com

CLIENT: CQU

ARCHITECT: THOMSON ADSETT / PEDDLE THORP

PROJECT: CQU ROCKHAMPTON TAFE CONSOLIDATION

TITLE: HYDRAULIC SERVICES ENGINEERING BUILDING - GROUND LEVEL - WATER SERVICES LAYOUT

SCALE @ A0:	CHECKED:	APPROVED:
1:100	AA	SM
PROJECT NUMBER:	DRAWN:	DATE:
PS229518	SH	JAN 2026

DRAWING No: ENG-HY-DR-520-L00-00-00 REV: B

© WSP Australia Pty Ltd

DRAWING CREATED IN REVIT