


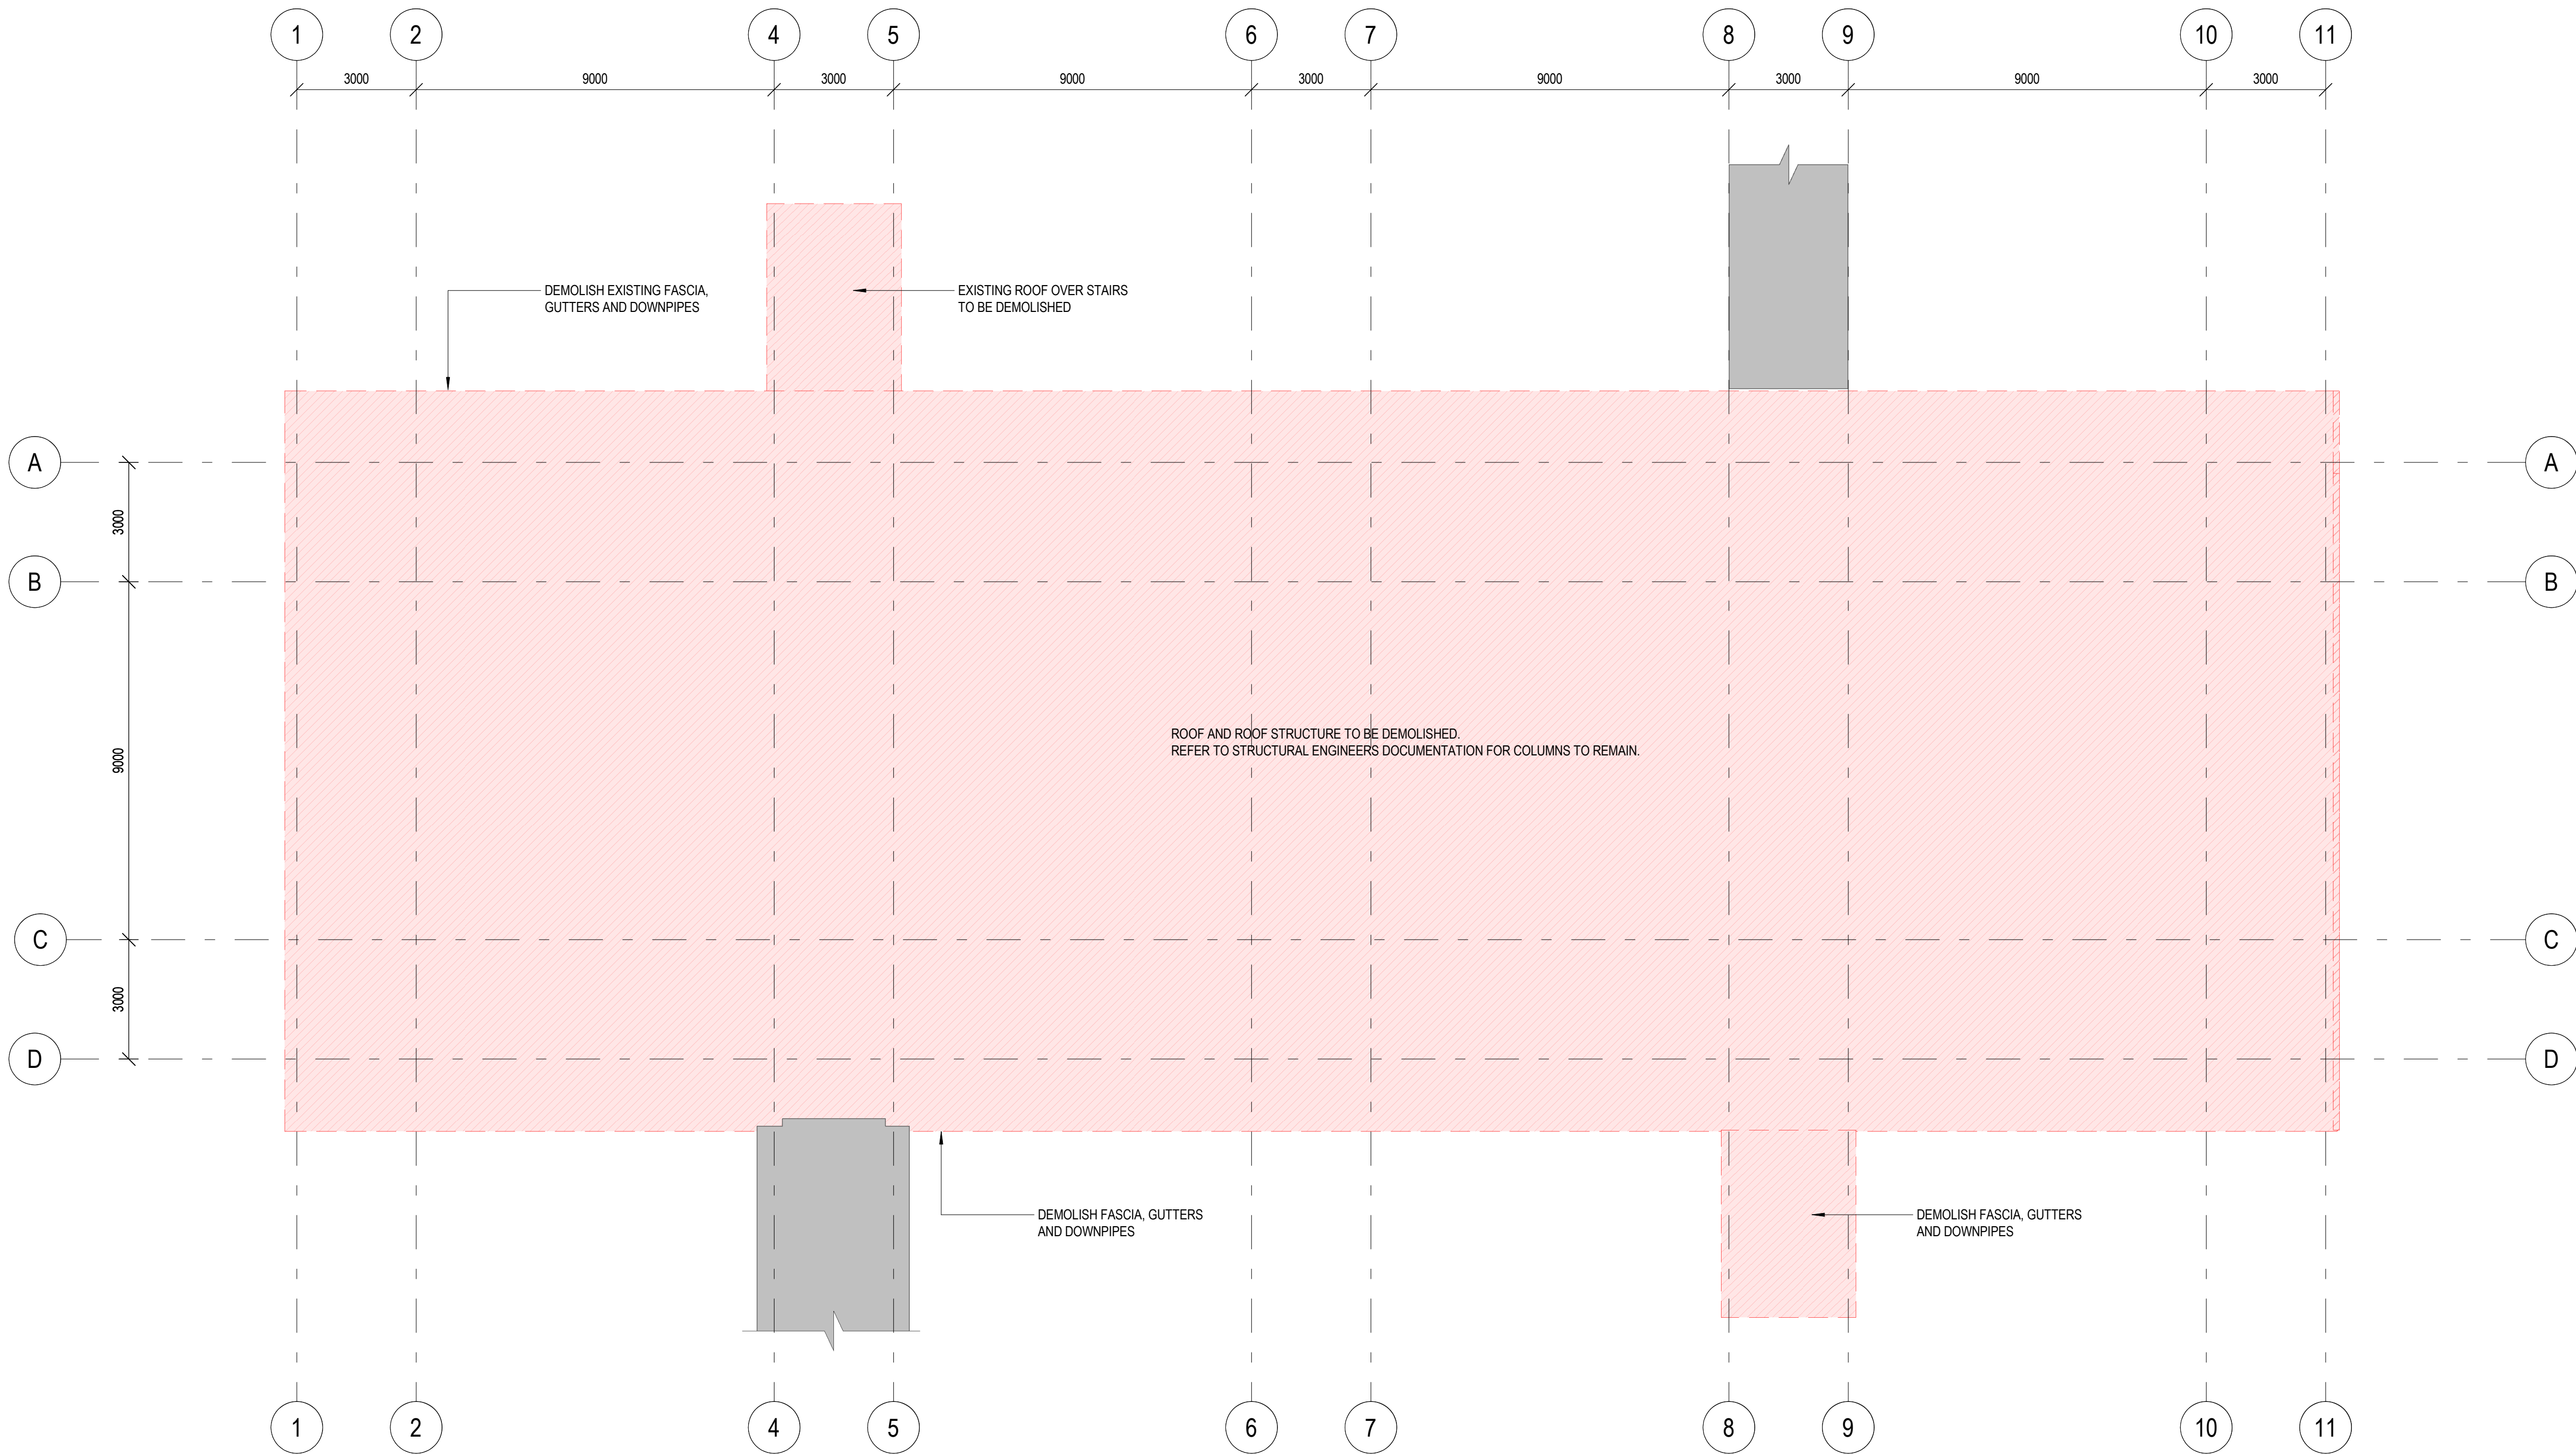

DEMOLITION LEGEND

- OUT OF SCOPE
 - EXISTING WALL
 - RED HATCH AND LINE INDICATES BUILDING ELEMENTS TO BE DEMOLISHED
- NOTE: REFER TO SERVICES ENGINEERS DOCUMENTATION FOR EXTENT OF DEMOLITION OF EXISTING BUILDING SERVICES.
- PLANS TO BE PRINTED IN COLOUR

GENERAL DEMOLITION NOTE

- BEFORE COMMENCEMENT OF DEMOLITION, LOCATE ALL EXISTING STRUCTURE TO BE DEMOLISHED. CONFIRM WITH STRUCTURAL ENGINEERS FOR TEMPORARY BRACING OF EXISTING STRUCTURE TO REMAIN DURING DEMOLITION AND PRIOR TO THE ERECTION OF NEW STRUCTURAL FRAMING. REFER TO RELEVANT CONSULTANTS DRAWINGS FOR EXTENTS OF SERVICES DEMOLITION AND ALTERATIONS THROUGHOUT. CAP AND SEAL REDUNDANT SERVICES TO ENGINEERS REQUIREMENTS.
- PROTECT ALL SERVICES NOT DOCUMENTED OR NOT REMOVED, REQUIRED TO BE RELOCATED OR DISCONNECTED. IF IN DOUBT, 'ASK'. SHOULD THE CONTRACTOR LOCATE A SERVICE WHICH IS NOT SHOWN ON THE CONTRACT DOCUMENTS NOTIFY THE RELEVANT CONSULTANT IMMEDIATELY & AWAIT FURTHER INSTRUCTIONS.
- ALL DEMOLITION OF EXISTING OR PART OF EXISTING STRUCTURE SHOULD BE INSPECTED & APPROVED BY THE STRUCTURAL ENGINEER BEFORE PROCEEDING.
- WHERE FLOOR FINISH IS DEMOLISHED, REMOVE ALL SUBSTRATES DOWN TO STRUCTURAL SLAB UNLESS OTHERWISE DIRECTED. MAKE GOOD FOR NEW WORKS.
- PATCH, GRIND AND SMOOTH CONCRETE TO RECEIVE NEW FLOOR FINISHES. CONTRACTOR TO ALLOW FOR NEW LEVELING COMPOUND IN PREPARATION OF SLAB SUBSTRATE.
- BUILDERS SITE ACCESS, SHED, PARKING, ENTRY POINTS & EXITS TO BE DETERMINED ON SITE WITH PROPRIETOR.
- CONTRACTOR TO ALLOW ALL COSTS FOR THE INSTALLATION OF INSULATION TO THE GROUND FLOOR CEILING FIRST FLOOR SLAB. MAKE GOOD AS REQUIRED. REFER TO SECTION J REPORT.
- DEMOLITION OF ALL WALLS / STRUCTURE TO BE READ IN CONJUNCTION WITH STRUCTURAL ENG'S DRAWINGS.
- DEMOLITION WORKS TO BE CONDUCTED WITH MINIMAL DISRUPTION OR DISTURBANCE TO THE DAILY OPERATION OF THE EXISTING BUILDING AND OCCUPANCY.
- PUBLIC AREAS TO BE KEPT FREE OF DEBRIS WITH DUST AND NOISE TO BE KEPT TO A PRACTICABLE MINIMUM.
- ACCESS TO AND FROM SITE TO BE CO-ORDINATED WITH THE BUILDING OWNERS REPRESENTATIVES.
- PRIOR TO ANY DEMOLITION WORKS BEING UNDERTAKEN THE CONTRACTOR IS TO CONFIRM THAT NO HAZARDOUS MATERIAL INCLUDING ASBESTOS IS INCLUDED WITHIN THE DEMOLITION SCOPE. BUILDING OWNER REPRESENTATIVES TO BE NOTIFIED IMMEDIATELY IF HAZARDOUS MATERIAL CONFIRMED. APPROPRIATE DISPOSAL METHODS TO BE IMPLEMENTED IF DETECTED.
- THE CONTRACTOR IS TO CONDUCT A SITE INSPECTION DURING THE TENDER PERIOD TO ASCERTAIN THE FULL EXTENT OF THE DEMOLITION WORKS ARE TO BE COMPLETED IN ACCORDANCE WITH ALL RELEVANT OCCUPATIONAL WORKPLACE HEALTH AND SAFETY REQUIREMENTS.
- INSTALL PROTECTIVE HOARDING AROUND WORK ZONE AND ADJACENT EXISTING AREAS WHICH ARE TO REMAIN UNAFFECTED BY DEMOLITION WORKS.
- CONTRACTOR TO ALLOW FOR REINSTATEMENT OF ANY EXISTING SERVICES WITHIN TENANCIES AFFECTED BY DEMOLITION WORKS.
- PROTECT AND MAKE GOOD ALL FINISHES ADJACENT TO AREA NOT IN WORKS

ISSUED FOR TENDER

© Copyright
These drawings and designs and the copyright thereof are the property of Thomson Adsett Pty Ltd and must not be used, retained or copied without written permission of Thomson Adsett Pty Ltd. ABN 76 105 314 654 Trading as ThomsonAdsett. Dimensions take precedence over scaling. Do not measure off drawings as print sizes may vary


CQU ROCKHAMPTON
TAFE
CONSOLIDATION -
STAGE 2

554/700 Yaamba Rd, Norman
Gardens QLD 4701



B	2026-03-05	ISSUED FOR TENDER	BC
A	2026-02-12	ISSUED FOR TENDER	BC
4	2026-01-30	60% DRAFT ISSUE	BC
3	2025-12-19	UPDATED ISSUE	BC
2	2025-12-15	CONSULTANT ISSUES	BC
1	2025-11-24	50% COSTING ISSUE	PT
rev\	date	details	init.

drawn	date
JS/BC	19/01/2026
checked	date
SS	12/02/2026
verified	date

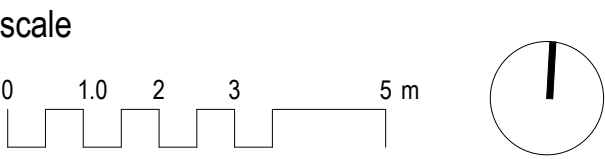

FLOOR PLAN - ROOF -
DEMOLITION

scale	project no.
As indicated @ A1	25.0236.17
revision	
B	
sheet no.	
CQU-ROK-033-RF-ARC-20-03	