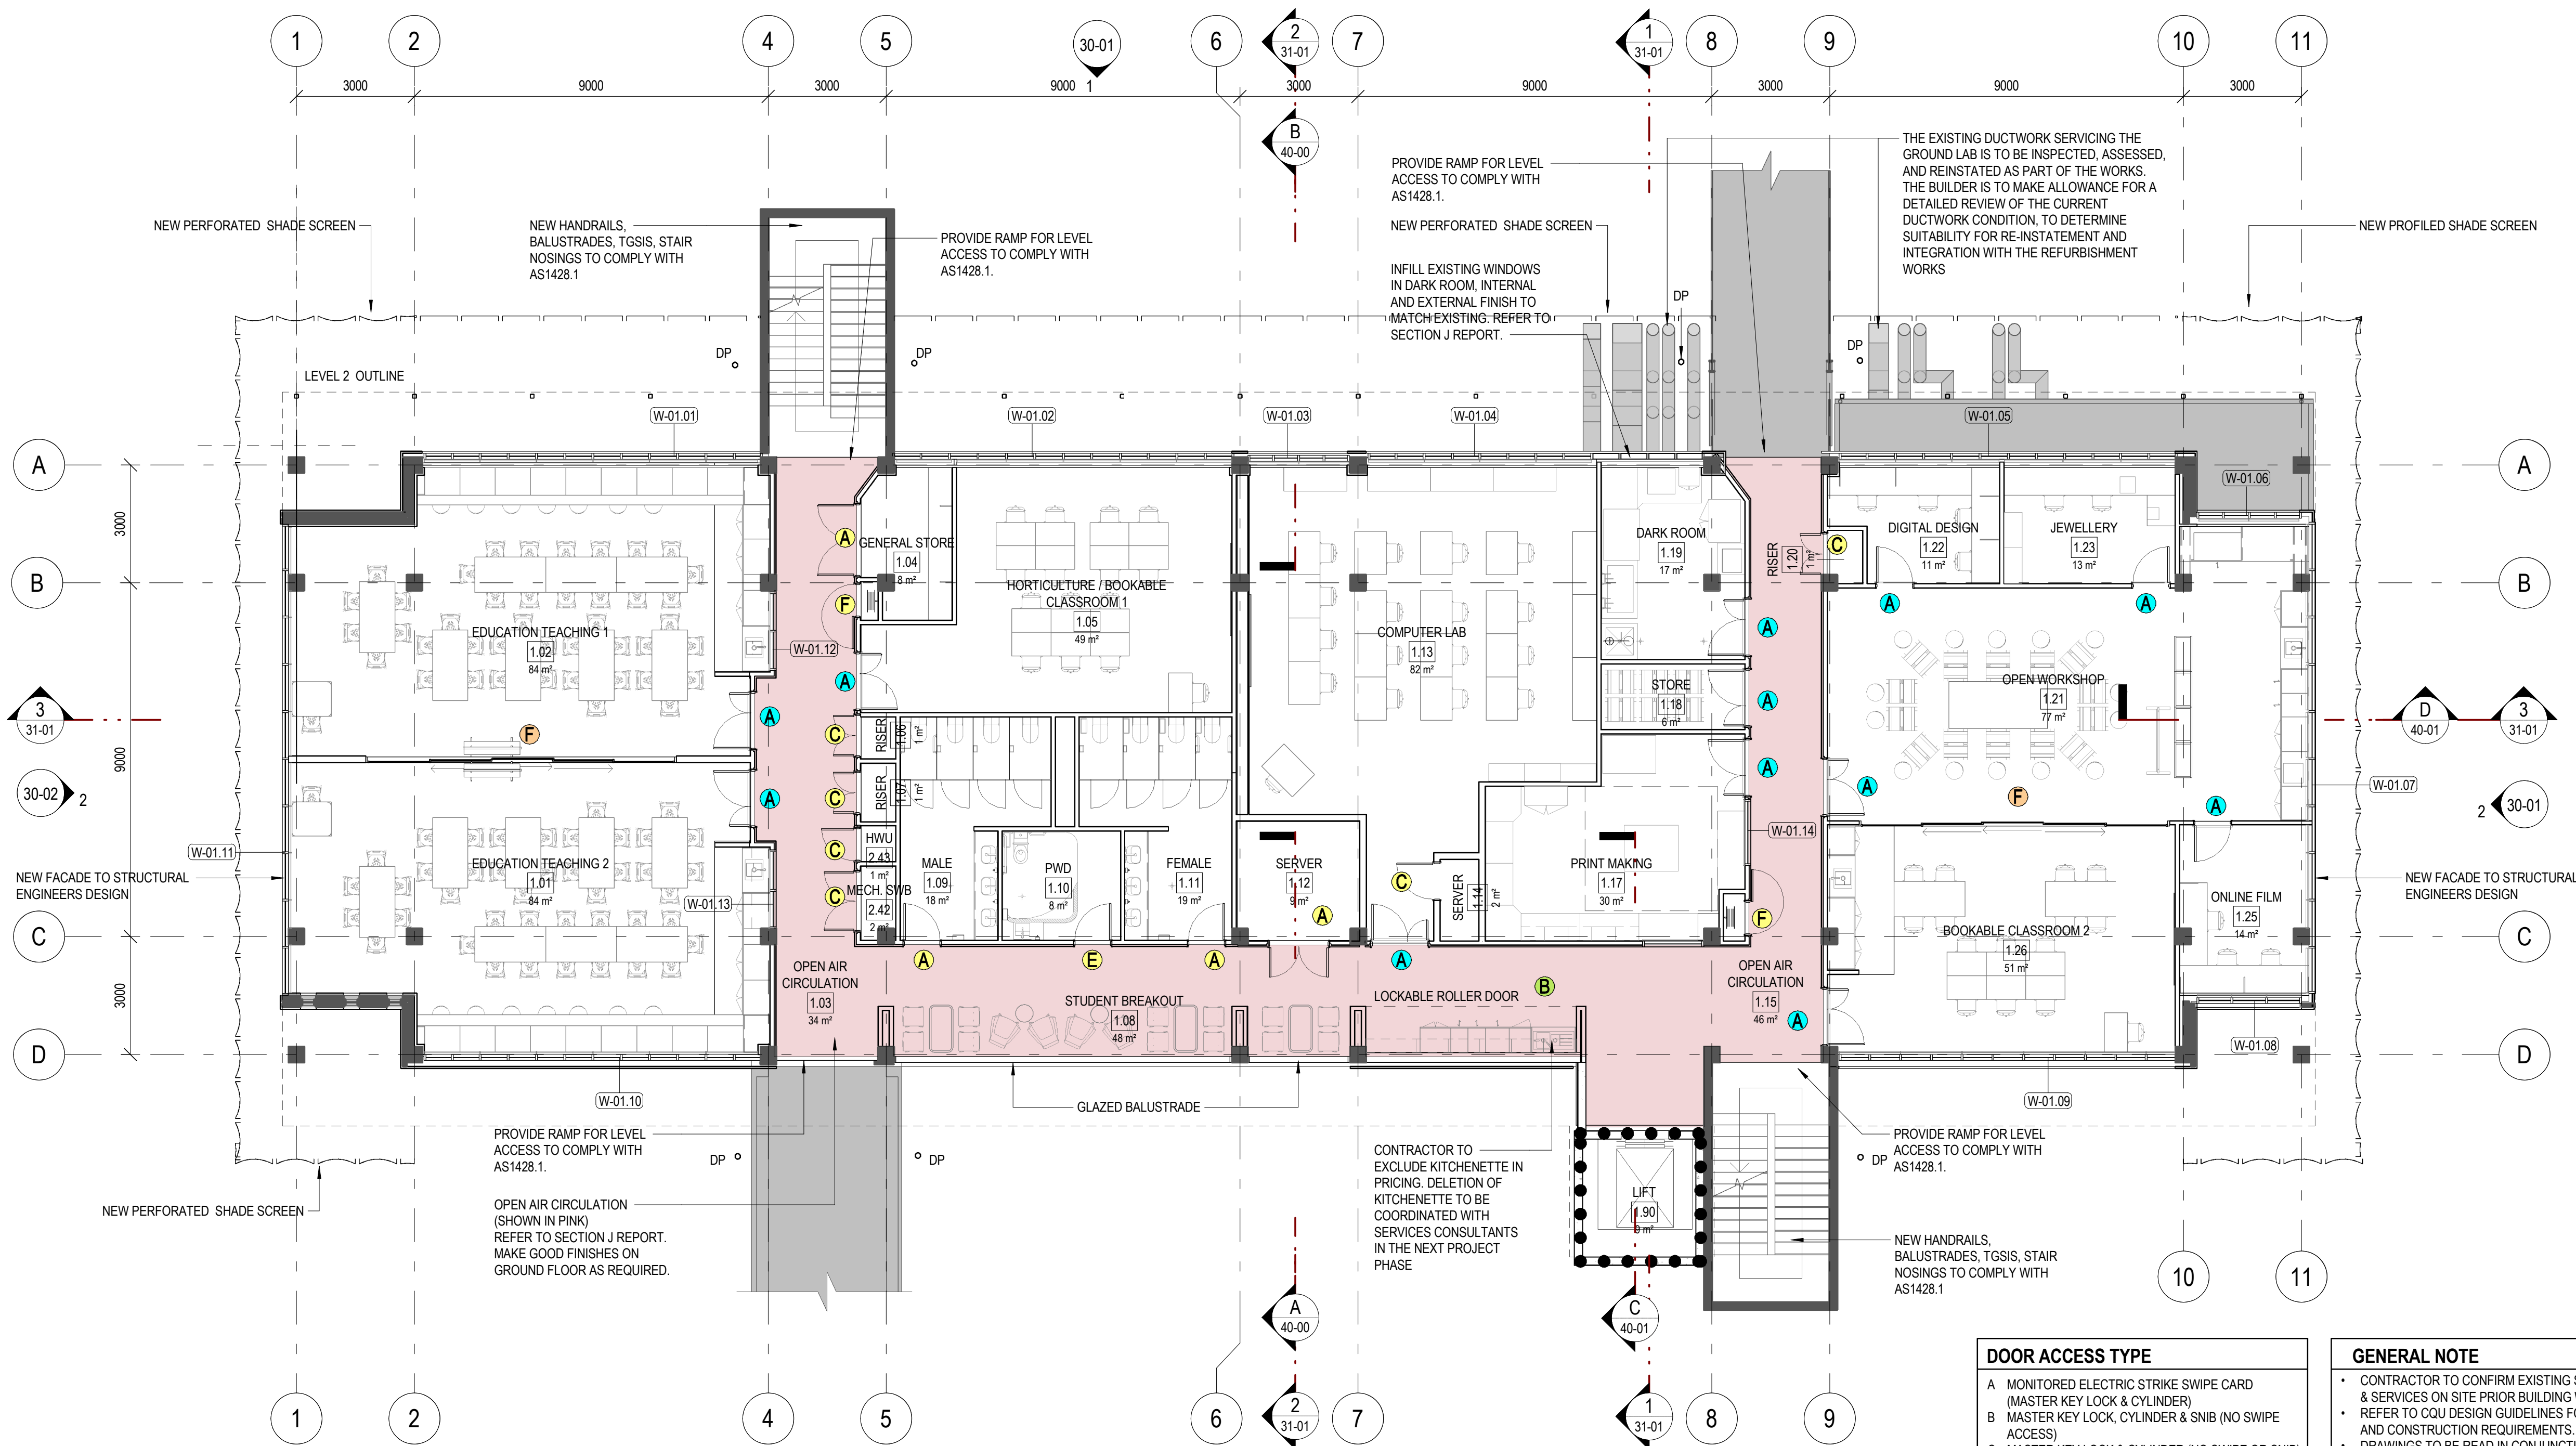


**CQU ROCKHAMPTON
TAFE
CONSOLIDATION -
STAGE 2**554/700 Yaamba Rd, Norman
Gardens QLD 4701

for

**DOOR ACCESS TYPE**

- A MONITORED ELECTRIC STRIKE SWIPE CARD (MASTER KEY LOCK & CYLINDER)
B MASTER KEY LOCK, CYLINDER & SNIB (NO SWIPE ACCESS)
C MASTER KEY LOCK & CYLINDER (NO SWIPE OR SNIB ACCESS)
D NON-LATCHING & PUSH/PULL
E PRIVACY SET & TURN SNIB
F TURN NIB (NO KEY)

DOOR TYPE

- SOLID CORE DOOR
● GLAZED SLIDER DOOR
● SOLID CORE DOOR WITH VISION PANEL
● GLAZED AUTO-SLIDER DOOR
● BI-FOLD GLAZED DOOR
● ROLLER DOOR
● ACOUSTIC STACKER DOOR
● GLAZED SWING DOOR

DOOR ICON LEGEND

- ACCESS TYPE (TYPE MARK)
● DOOR TYPE (COLOUR SHADE)

WINDOW LEGEND

- W-XX.XX WINDOW NUMBER
LEVEL
WINDOW PREFIX

GENERAL NOTE

- CONTRACTOR TO CONFIRM EXISTING STRUCTURE & SERVICES ON SITE PRIOR BUILDING WORKS.
- REFER TO CQU DESIGN GUIDELINES FOR DESIGN AND CONSTRUCTION REQUIREMENTS.
- DRAWINGS TO BE READ IN CONJUNCTION WITH SERVICES, CIVIL AND STRUCTURAL DRAWINGS.
- REFER TO ROOM LAYOUT SHEET FOR EXTENT OF WORK INCLUDING GLAZED DOOR AND TO REFER FOR ALL FURNITURE SETOUT
- REFER TO OUTLINE SPECIFICATION & SCHEDULE FOR FF&E AND FINISHES
- CONTRACTORS TO CONFIRM DIMENSIONS ON SITE
- INSTALL HEARING AUGMENTATION SYSTEM AS PER NOC REQUIREMENT
- ALLOW FOR PENETRATIONS AS REQUIRED. ENSURE FIRE SEPARATION IS PROVIDED AS REQUIRED.
- ALLOW FOR INSULATION INSTALLATION TO FLOOR ABOVE AND BELOW. MAKE GOOD AS REQUIRED.
- DOOR NOTES
 - TOILET DOORS TO HAVE CARD SWIPE ACCESS OUTSIDE OF OPERATING HOURS. CONFIRM WITH CQU.
 - REFER TO MECHANICAL DRAWINGS FOR GRILLE AND UNDERCUT
 - ALL SERVICE DOORS TO HAVE SMOKE SEALS
 - DOOR FUNCTION AND HARDWARE TO BE IN ACCORDANCE TO CQU GUIDELINES.
 - DOORS TO HAVE 300mm HIGH STAINLESS STEEL KICKPLATE, UNLESS SPECIFIED.
 - ENSURE DOORS TO HAVE DOOR CLOSER & STOPS, WHICH COMPLIES WITH AS 1428.1
 - EXTERNAL DOORS TO BE MANUALLY OPERATED, OPENING OUTWARDS. ENSURE THIS COMPLIES WITH AS 1428.1
 - FIRE RATED DOORS TO HAVE PUSH BAR FOR EXIT.
 - SINGLE SWING DOORS FOR CIRCULATION ACCESS TO BE 920MM WIDE, UNLESS SPECIFIED
 - ALL EXTERNAL DOORS, LECTURE THEATRE DOORS, PLANT ROOMS, TOILET DOORS, FIRES DOORS AND EMERGENCY EXIT TO HAVE AUTO-CLOSER DOORS
 - CQU TO CONFIRM SECURITY ACCESS REQUIREMENT TO OFFICES AND CLASSROOMS
 - EXTERNALLY LOCKED DOORS TO HAVE STRIKER PLATE PROTECTION INSTALLED
 - PROVIDE DOOR CLOSERS TO ALL DOORS ENCLOSING AIR-CONDITIONED SPACES

GENERAL

- REFER TO SECTION J REPORT FOR THE REQUIRED INSULATION REQUIREMENTS
- ● ● REFER TO CERTIFIER'S COMMENT FOR FRL REQUIREMENT


WINDOW SCHEDULE BUILDING 33 - LEVEL 1 - INTERNAL				
NAME	LEVEL	LENGTH	SILL HEIGHT	OVERALL HEIGHT
W-01.12	LEVEL 1	2000	1200	1200
W-01.13	LEVEL 1	2000	1200	1200
W-01.14	LEVEL 1	1700	1100	1000

WINDOW SCHEDULE BUILDING 33 - LEVEL 1 - EXTERNAL				
NAME	LEVEL	LENGTH	SILL HEIGHT	OVERALL HEIGHT
W-01.01	LEVEL 1	EXISTING LENGTH	1000	1200
W-01.02	LEVEL 1	EXISTING LENGTH	1000	1200
W-01.03	LEVEL 1	EXISTING LENGTH	1000	1200
W-01.04	LEVEL 1	EXISTING LENGTH	1000	1200
W-01.05	LEVEL 1	EXISTING LENGTH	1000	1200
W-01.06	LEVEL 1	EXISTING LENGTH	1000	1200
W-01.07	LEVEL 1	EXISTING LENGTH	1100	1600
W-01.08	LEVEL 1	EXISTING LENGTH	1200	1200
W-01.09	LEVEL 1	EXISTING LENGTH	1200	1200
W-01.10	LEVEL 1	EXISTING LENGTH	1000	1200
W-01.11	LEVEL 1	EXISTING LENGTH	0	2700

B	2026-03-05	ISSUED FOR TENDER	BC
A	2026-02-12	ISSUED FOR TENDER	BC
6	2026-01-30	60% DRAFT ISSUE	BC
5	2026-01-23	CONSULTANT ISSUES	BC
4	2025-12-19	UPDATED ISSUE	BC
3	2025-12-16	UPDATED ISSUE	BC
2	2025-12-15	CONSULTANT ISSUES	BC
1	2025-11-24	50% COSTING ISSUE	PT

rev	date	details	init.
-----	------	---------	-------

drawn	date
JS/BC	19/01/2026
checked	date
SS	12/02/2026
verified	date

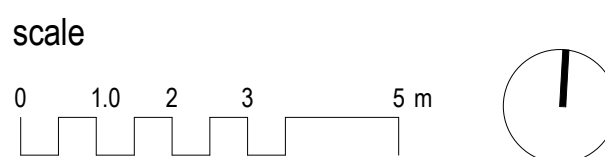**FLOOR PLAN - LEVEL 1 -
PROPOSED**scale
1 : 100 @ A1
project no.
25.0236.17

revision

B

sheet no.

CQU-ROK-033-01-ARC-21-01

ISSUED FOR TENDER