


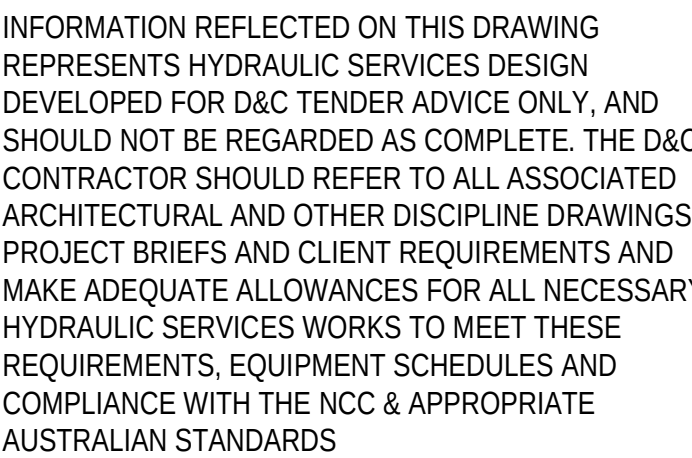

SERVICES SHOWN AS EXISTING HAVE BEEN INTERPOLATED FROM RECORD DRAWINGS. CONTRACTOR TO VERIFY LOCATIONS AND LEVELS PRIOR TO COMMENCEMENT OF WORK.

1. ALLOW ALL COLD TAPS TO RETICULATE ALL HOT AND COLD WATER FROM AREA ISOLATION OR T/M TO FIXTURES WITHIN THE ROOM.
2. HOT WATER DEAD LEG LENGTH FROM CIRCULATION LOOP SHALL NOT EXCEED THE MAXIMUM VALUE PRESCRIBED IN ASINZS 3500.4.
3. ALL FIXTURES ARE TO HAVE MINISOL VALVES AT POINT OF CONNECTION FOR TAPWARE WITH FLEXIBLE HOSES, OR ARE TO BE ISOLATED BY MEANS OF ISOLATING GATE VALVE OR THE ROOM INDEPENDENTLY FROM THE REMAINDER OF THE BUILDING.
4. ALL PENETRATIONS OR CAST THROUGH CONCRETE STRUCTURE ARE TO BE APPROVED BY THE STRUCTURAL ENGINEER.
5. ALL REDUNDANT PENETRATIONS THROUGH STRUCTURAL ELEMENTS ARE TO BE MADE GOOD TO THE SATISFACTION OF THE STRUCTURAL ENGINEER.
6. SERVICES PASSING THROUGH A FIRE RATED STRUCTURE SHALL HAVE FIRE COLLARS (OR OTHER APPROVED FIRE PROTECTION METHOD) RATED TO THE MINIMUM RFL OF THE STRUCTURE IT IS PENETRATING.
7. WHERE METAL PIPING PASSES THROUGH STRUCTURE WHICH IS TO BE FIRE RATED, MINIMUM PENETRATION SIZE AND PACK AROUND SHALL BE PROVIDED TO PREVENT UNDESIRABLE SEALANT TO THE MCC CASIS AND THE MANUFACTURERS REQUIREMENTS TO ENSURE OPENINGS ARE COMPLETELY CLOSED IN THE EVENT OF A FIRE.
8. PROVIDE PRESSURE REDUCTION AS REQUIRED TO ENSURE THAT ALL FIXTURES HAVE A PRESSURE WITHIN THE MAXIMUM AND MINIMUM PRESSURE RANGES SPECIFIED IN THE SPECIFICATION. ALL PRESSURE REDUCTION ON MAIN LINES SHALL HAVE N+1 REDUNDANCY (INSTALLED IN PARALLEL) WITH UPSTREAM AND DOWNSTREAM ISOLATION OF EACH VALVE.
9. DOCUMENTATION MAY NOT INDICATE ALL LOCATIONS OF REQUIRED VALVING. FINAL REQUIREMENTS TO BE DOCUMENTED IN FURTHER DESIGN DEVELOPMENT.
10. WHERE REQUIRED PROVIDE CEILING ACCESS PANELS TO MAINTAIN ACCESS TO ALL VALVING, METERS, T/M'S ETC.
11. PROVIDE BACKFLOW PREVENTION DEVICES AS REQUIRED TO ENSURE THAT ZONE PROTECTION IS RETAINED IN ACCORDANCE WITH ASINZS3500.1 AND LOCAL AUTHORITY REQUIREMENTS.
12. CONTRACTOR TO REFER TO STRUCTURAL DRAWINGS BEFORE CONCRETE CASTING. ALLOW ALL COSTS FOR CUTTING AND REINSTATEMENT AS REQUIRED.
13. CONTRACTOR TO COORDINATE PROVISIONS WITH FINAL FF&E LAYOUT PROVIDED BY ARCHITECT.

B33-HY-DR-520-L01-00-00	B
-------------------------	---