


NOTES:

- AHU-19-L3-01 & AHU-19-L3-02
SUPPLY DUCT RUNS TO HAVE A MINIMUM 25M OF 75mm THICK ACOUSTIC LINING BEFORE FIRST TAKE-OFF. RETURN DUCT RUNS TO HAVE MINIMUM 15M OF 75mm THICK ACOUSTIC LINING AND ONE LINED ELBOW BEFORE FIRST TAKE-OFF.
- AHU-19-L3-03 & 04
SUPPLY DUCT RUNS TO HAVE A MINIMUM 2M OF 75mm THICK ACOUSTIC LINING BEFORE FIRST TAKE-OFF. RETURN DUCT RUNS TO HAVE MINIMUM 2M OF 75mm THICK ACOUSTIC LINING AND ONE LINED ELBOW BEFORE FIRST TAKE-OFF.
- FCU-19-L3-01 TO 03
SUPPLY DUCT RUNS TO HAVE A MINIMUM 2M OF 75mm THICK ACOUSTIC LINING BEFORE FIRST TAKE-OFF. RA PLenums TO BE INTERNALLY LINED WITH 75mm THICK ACOUSTIC LINING. RETURN DUCT RUNS TO HAVE MINIMUM 2M OF 75mm THICK ACOUSTIC LINING AND ONE LINED ELBOW BEFORE FIRST TAKE-OFF.

INFORMATION REFLECTED ON THIS DRAWING REPRESENTS MECHANICAL SERVICES DESIGN DEVELOPED FOR D&C TENDER ADVISE ONLY, AND SHOULD NOT BE REGARDED AS COMPLETE. THE D&C CONTRACTOR SHOULD REFER TO ALL ASSOCIATED ARCHITECTURAL AND OTHER DISCIPLINE DRAWINGS, PROJECT BRIEFS AND CLIENT REQUIREMENTS AND MAKE ADEQUATE ALLOWANCES FOR ALL NECESSARY MECHANICAL SERVICES WORKS TO MEET THESE REQUIREMENTS, EQUIPMENT SCHEDULES AND COMPLIANCE WITH THE NCC & APPROPRIATE AUSTRALIAN STANDARDS

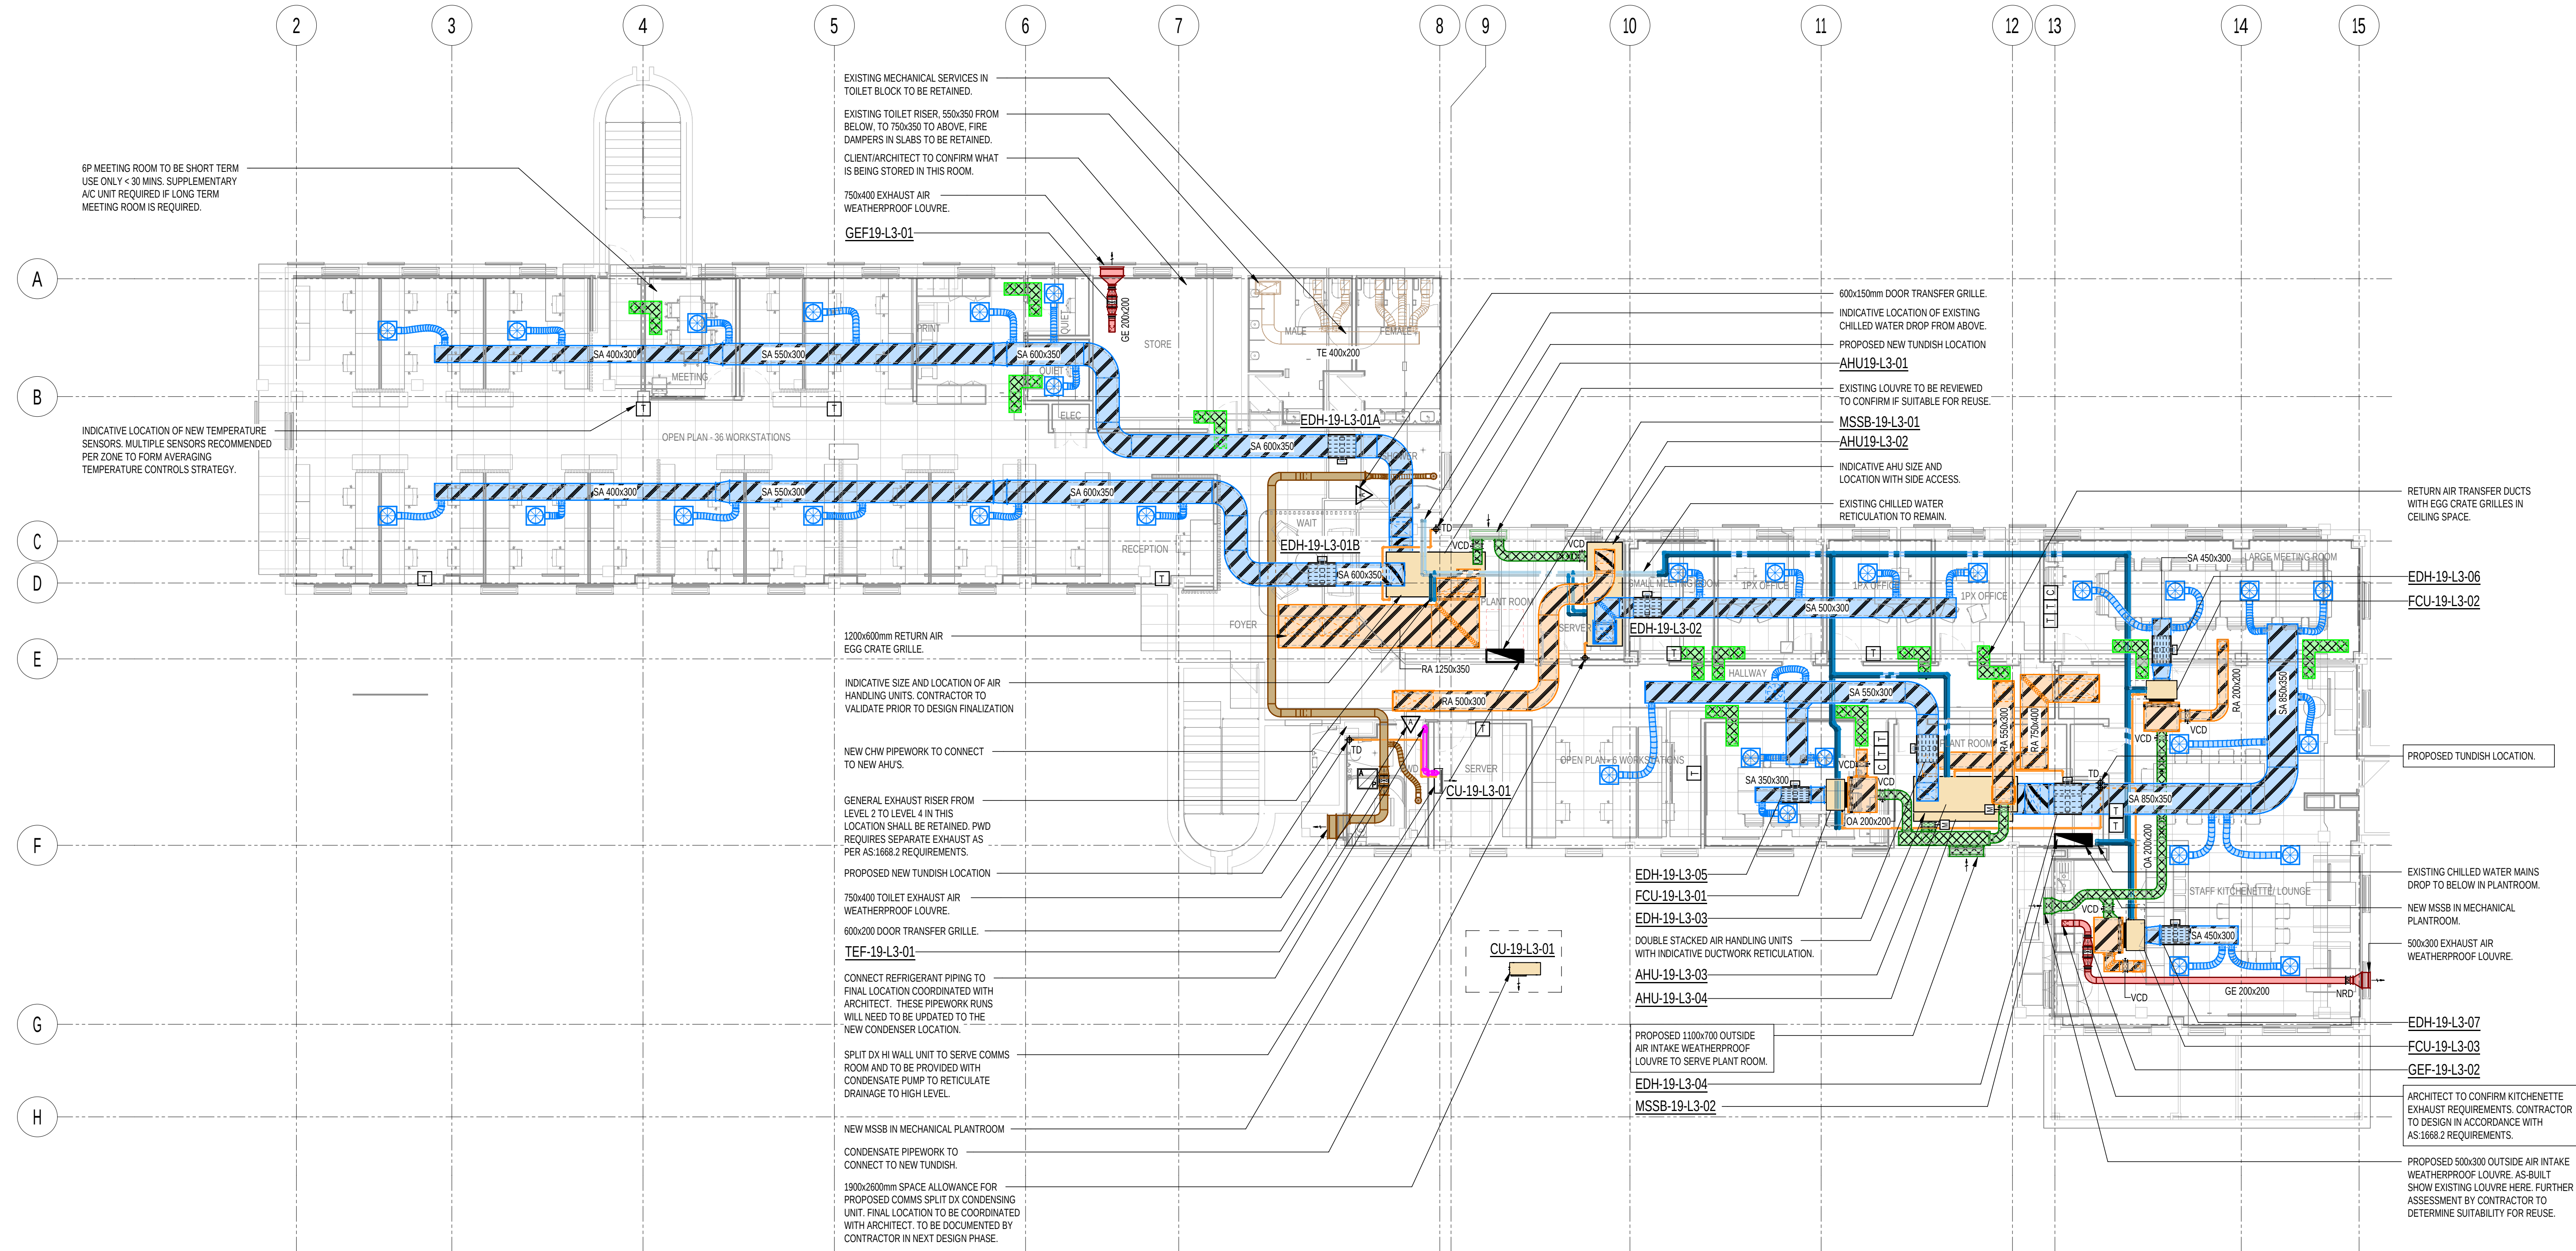

B	12.02.2026	RD	ISSUED FOR D&C TENDER	MB	SM
A	10.02.2026	RD	ISSUED FOR D&C TENDER	MB	APP
REV	DATE	BY	DESCRIPTION	CHK	APP

DESIGN DEVELOPMENT

wsp

900 Ann Street, Level 12, Fortitude Valley 4006
Tel: +61-7-3854-6200 Fax: +61-7-3854-6500
<http://www.wsp.com>

CLIENT: CQU

ARCHITECT: PEDDLE THORP

PROJECT: CQU ROCKHAMPTON TAFE CONSOLIDATION

TITLE: MECHANICAL SERVICES BUILDING 19 - LEVEL 03 - HVAC LAYOUT

SCALE: 8 A0 1:100

PROJECT NUMBER: PS229518

DRAWING NO: B19-ME-DR-510-L03-00-00

DATE: FEB 2026

REV: B

© WSP Australia Pty Ltd