


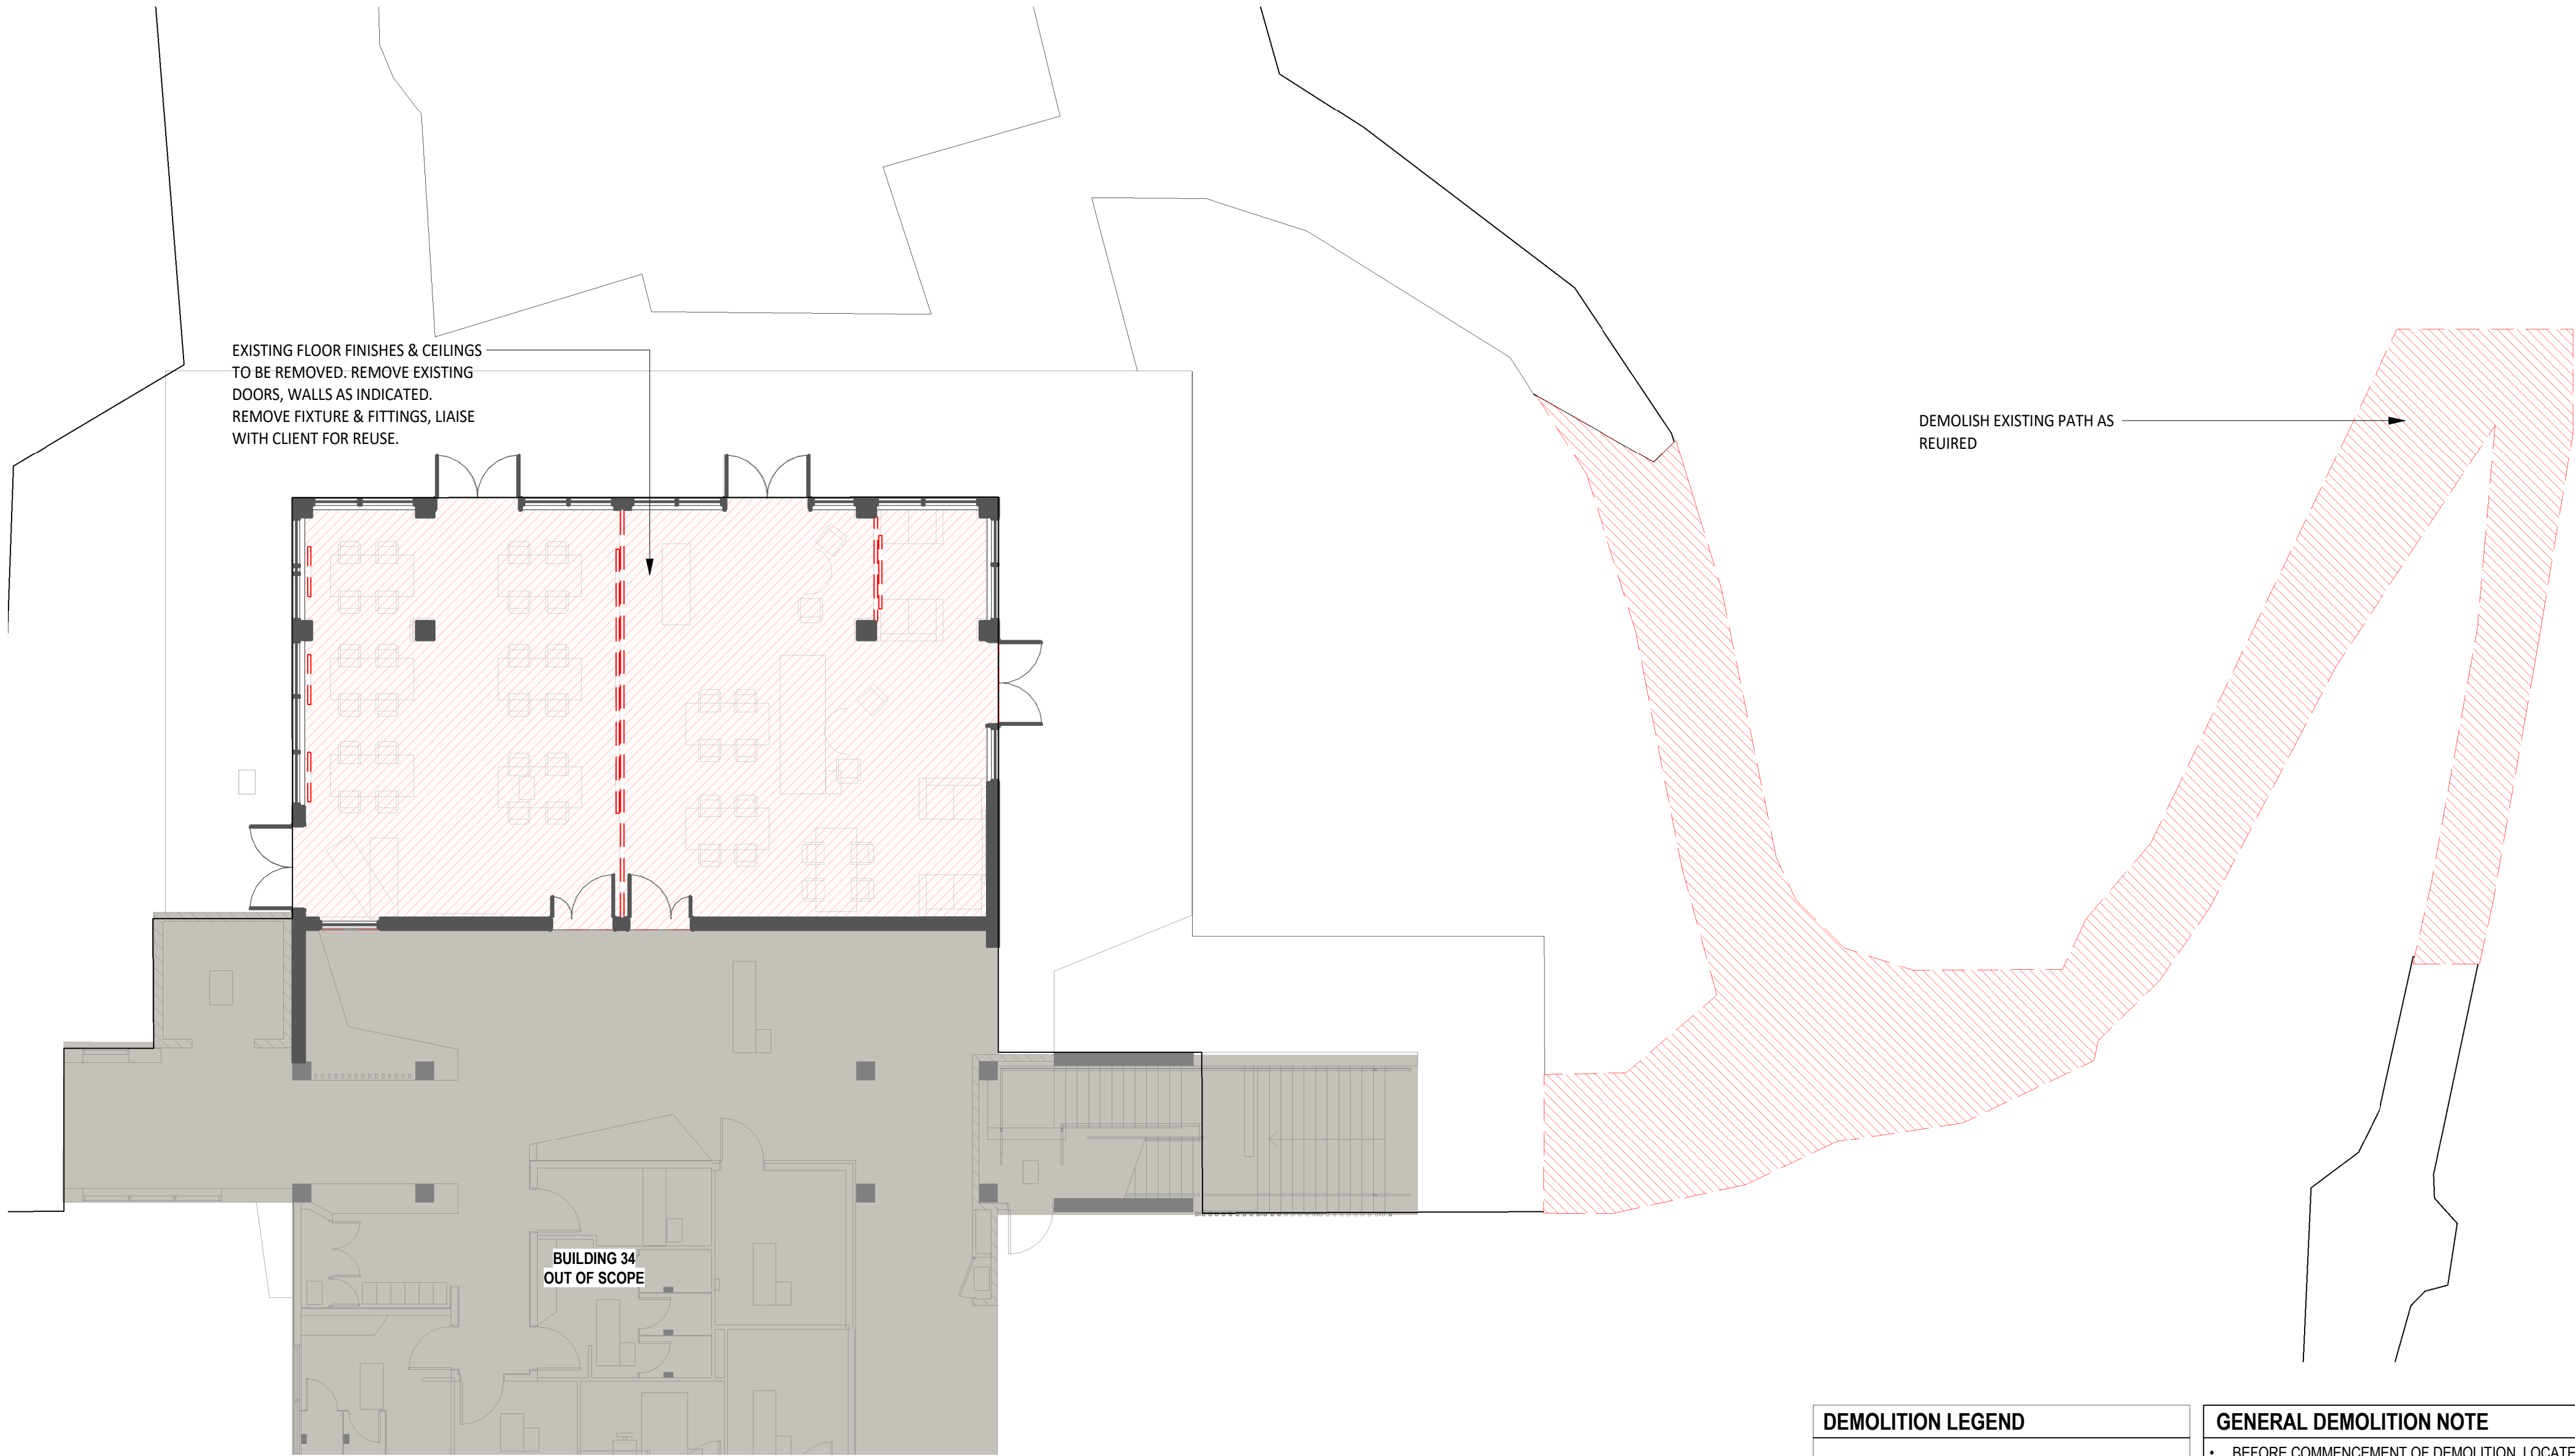

DEMOLITION LEGEND

OUTSIDE OF SCOPE

EXISTING WALL

RED HATCH AND LINE INDICATES BUILDING ELEMENTS TO BE DEMOLISHED

NOTE: REFER TO SERVICES ENGINEERS DOCUMENTATION FOR EXTENT OF DEMOLITION OF EXISTING BUILDING SERVICES.

PLANS TO BE PRINTED IN COLOUR

GENERAL DEMOLITION NOTE

- BEFORE COMMENCEMENT OF DEMOLITION, LOCATE ALL EXISTING STRUCTURE TO BE DEMOLISHED. CONFIRM WITH STRUCTURAL ENGINEERS FOR TEMPORARY BRACING OF EXISTING STRUCTURE TO REMAIN DURING DEMOLITION AND PRIOR TO THE ERECTION OF NEW STRUCTURAL FRAMING.
- REFER TO RELEVANT CONSULTANT'S DRAWINGS FOR EXTENTS OF SERVICES DEMOLITION AND ALTERATIONS THROUGHOUT. CAP AND SEAL REDUNDANT SERVICES TO ENGINEER'S REQUIREMENTS.
- PROTECT ALL SERVICES NOT DOCUMENTED OR NOT REMOVED, REQUIRED TO BE RELOCATED OR DISCONNECTED. IF IN DOUBT, 'ASK' SHOULD THE CONTRACTOR LOCATE A SERVICE WHICH IS NOT SHOWN ON THE CONTRACT DOCUMENTS NOTIFY THE RELEVANT CONSULTANT IMMEDIATELY & AWAIT FURTHER INSTRUCTIONS.
- ALL DEMOLITION OF EXISTING OR PART OF EXISTING STRUCTURE SHOULD BE INSPECTED & APPROVED BY THE STRUCTURAL ENGINEER BEFORE PROCEEDING.
- PROTECT AND MAKE GOOD ALL FINISHES ADJACENT TO AREA NOT IN WORKS
- WHERE FLOOR FINISH IS DEMOLISHED, REMOVE ALL SUBSTRATES DOWN TO STRUCTURAL SLAB UNLESS OTHERWISE DIRECTED.
- PATCH, GRIND AND SMOOTH CONCRETE TO RECEIVE NEW FLOOR FINISHES. CONTRACTOR TO ALLOW FOR NEW LEVELING COMPOUND IN PREPARATION OF SLAB SUBSTRATE.
- BUILDERS SITE ACCESS, SHED, PARKING, ENTRY POINTS & EXITS TO BE DETERMINED ON SITE WITH PROPRIETOR.

- DEMOLITION OF ALL WALLS / STRUCTURE TO BE READ IN CONJUNCTION WITH STRUCTURAL ENG'S DRAWINGS.
- DEMOLITION WORKS TO BE CONDUCTED WITH MINIMAL DISRUPTION OR DISTURBANCE TO THE DAILY OPERATION OF THE EXISTING BUILDING AND OCCUPANCY.
- PUBLIC AREAS TO BE KEPT FREE OF DEBRIS WITH DUST AND NOISE TO BE KEPT TO A PRACTICABLE MINIMUM.
- ACCESS TO AND FROM SITE TO BE CO-ORDINATED WITH THE BUILDING OWNERS REPRESENTATIVES.
- PRIOR TO ANY DEMOLITION WORKS BEING UNDERTAKEN THE CONTRACTOR IS TO CONFIRM THAT NO HAZARDOUS MATERIAL INCLUDING ASBESTOS IS INCLUDED WITHIN THE DEMOLITION SCOPE.
- BUILDING OWNER REPRESENTATIVES TO BE NOTIFIED IMMEDIATELY IF HAZARDOUS MATERIAL CONFIRMED. APPROPRIATE DISPOSAL METHODS TO BE IMPLEMENTED IF DETECTED.
- THE CONTRACTOR IS TO CONDUCT A SITE INSPECTION DURING THE TENDER PERIOD TO ASCERTAIN THE FULL EXTENT OF THE DEMOLITION WORKS ARE TO BE COMPLETED IN ACCORDANCE WITH ALL RELEVANT OCCUPATIONAL WORKPLACE HEALTH AND SAFETY REQUIREMENTS.
- INSTALL PROTECTIVE HOARDING AROUND WORK ZONE AND ADJACENT EXISTING AREAS WHICH ARE TO REMAIN UNAFFECTED BY DEMOLITION WORKS.
- CONTRACTOR TO ALLOW FOR REINSTATEMENT OF ANY EXISTING SERVICES WITHIN TENANCIES AFFECTED BY DEMOLITION WORKS.

ISSUED FOR TENDER

FLOOR PLAN - GROUND

G.08 - DEMOLITION

scale

As indicated @ A1

revision

B

sheet no.

project no.

25.0236.17

CQU-ROK-034-GN-ARC-20-01


© Copyright
These drawings and designs and the copyright thereof are the property of Thomson Adsett Pty Ltd and must not be used, retained or copied without written permission of Thomson Adsett Pty Ltd. ABN 76 105 314 654 Trading as ThomsonAdsett. Dimensions take precedence over scaling. Do not measure off drawings as print sizes may vary

CQU ROCKHAMPTON
TAFE
CONSOLIDATION -
STAGE 2
554/700 Yaamba Rd, Norman
Gardens QLD 4701



B	2026-03-05	ISSUED FOR TENDER	BC
A	2026-02-12	ISSUED FOR TENDER	BC
2	2026-01-30	60% DRAFT ISSUE	BC
1	2026-01-22	CONSULTANT ISSUE	BC
rev	date	details	init.

drawn	date
JT/JS	19/01/2026
checked	date
SS	12/02/2026
verified	date

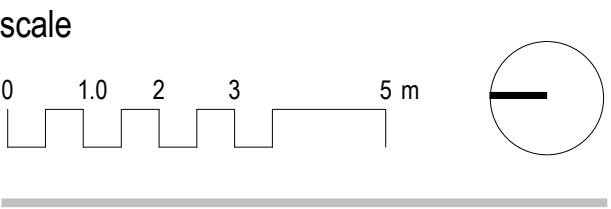

CQU ROCKHAMPTON TAFE CONSOLIDATION - STAGE 2

554/700 Yaamba Rd, Norman
Gardens QLD 4701


for



CQUniversity
AUSTRALIA

B	2026-03-05	ISSUED FOR TENDER	BC
A	2026-02-12	ISSUED FOR TENDER	BC
2	2026-01-30	60% DRAFT ISSUE	BC
1	2026-01-22	CONSULTANT ISSUE	BC
rev	date	details	init.

drawn	date
JT/JS	19/01/2026
checked	date
SS	12/02/2026
verified	date

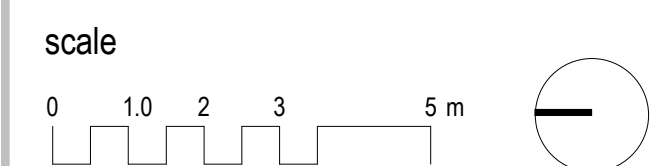

**FLOOR & CEILING PLAN -
GROUND G.08 - PROPOSED**

scale	project no.
As indicated @ A1	25.0236.17


revision

B

sheet no.


CQU-ROK-034-GN-ARC-21-01

original sheet size - A1 (594mm x 841mm)

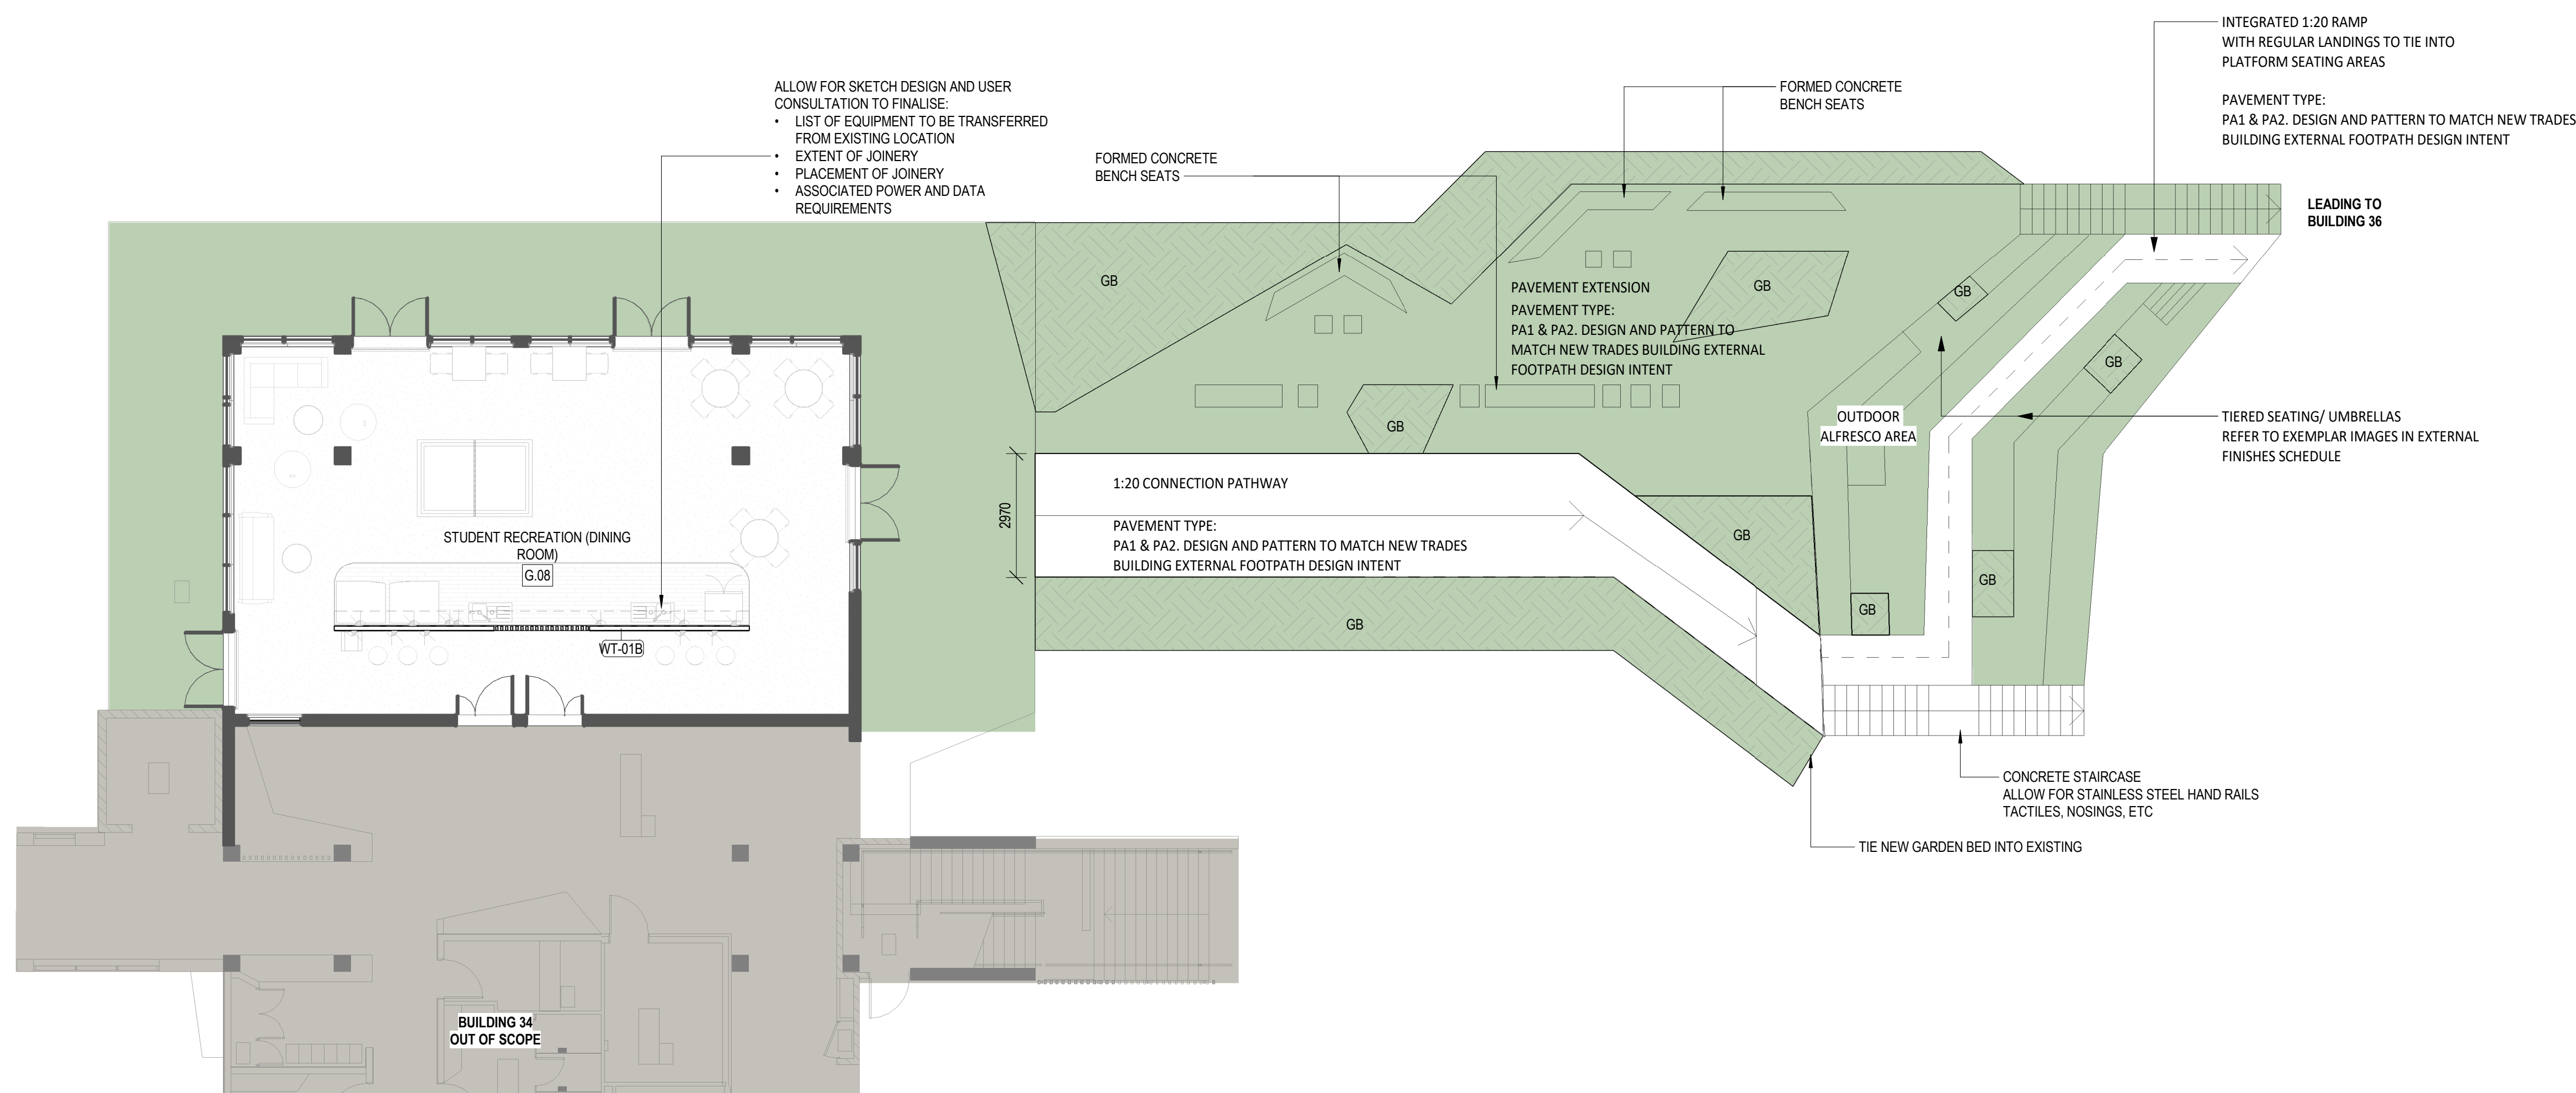

1
31-00

GROUND FLOOR - PROPOSED
1:100

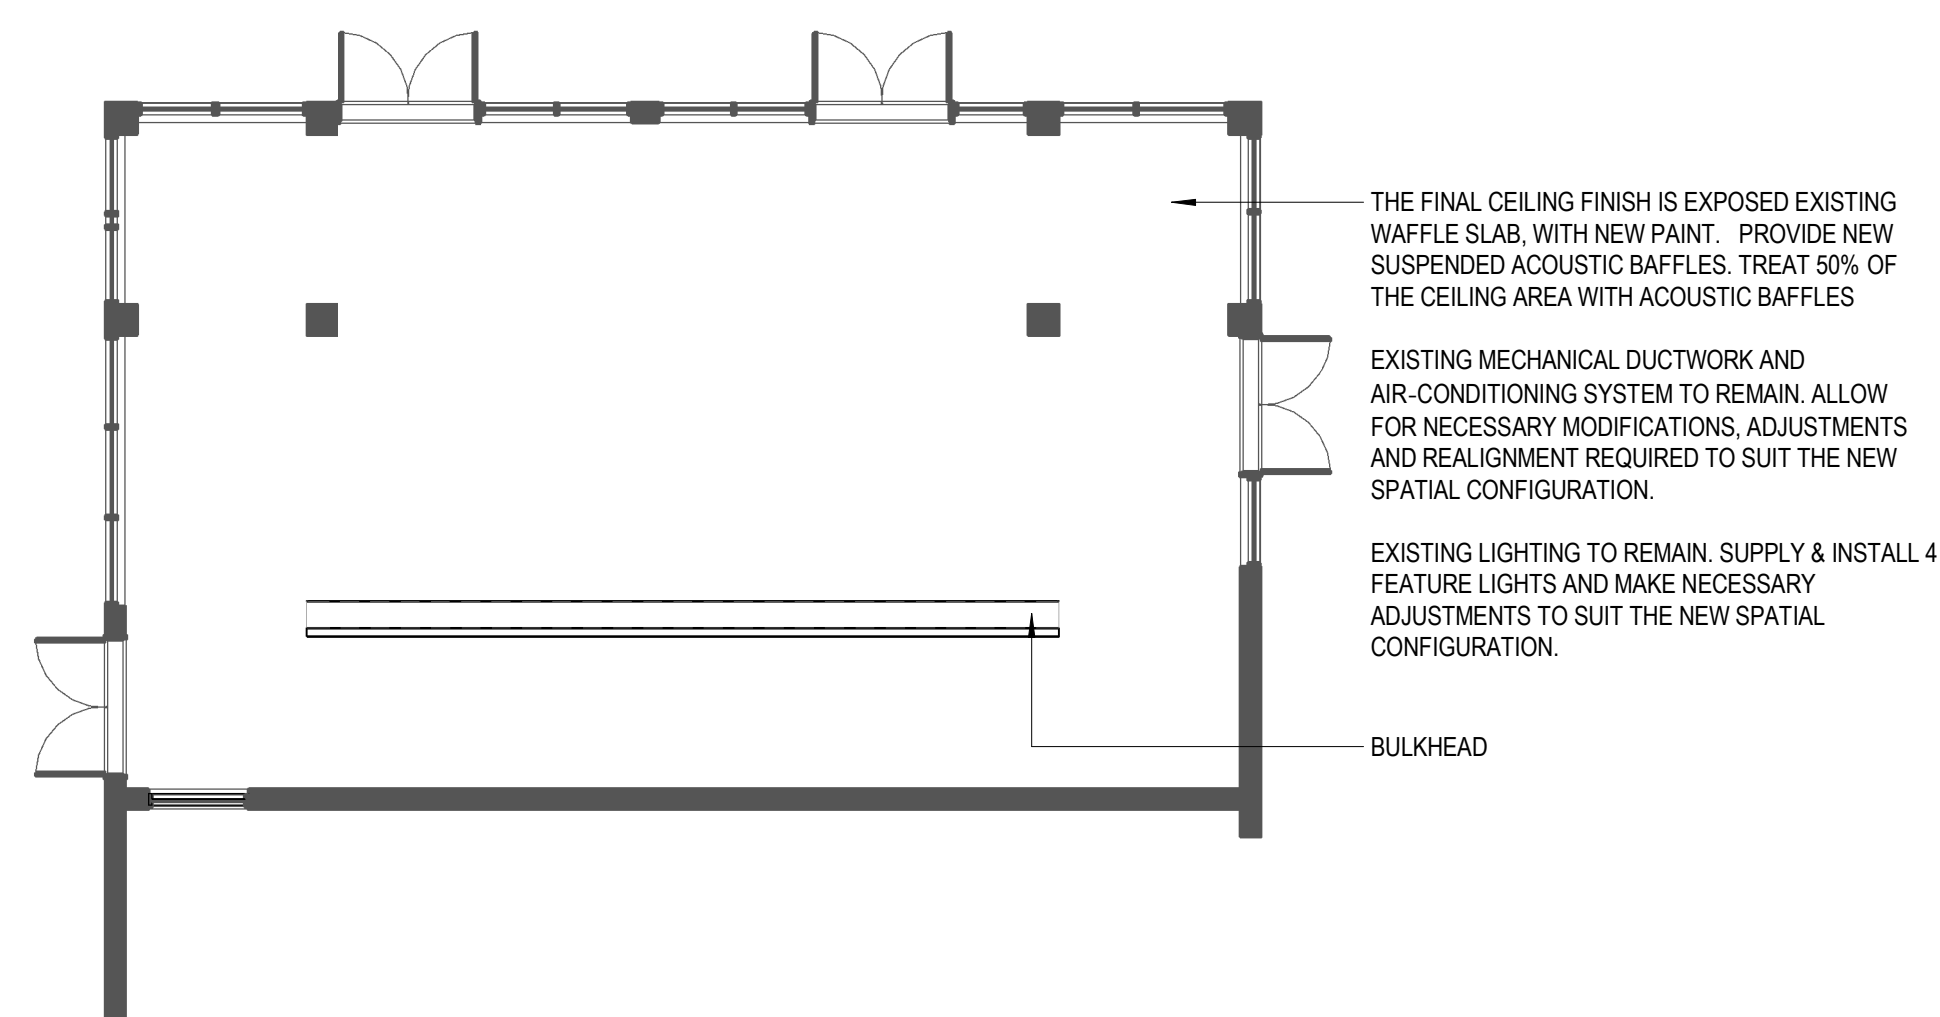

2
31-00

GROUND FLOOR - CEILING PLAN - GROUND FLOOR
1 : 100

WALL LEGEND

WT-01B_SF 92_PB 13 / PB WP 13

13 92 13

WT-01B

13mm PLASTERBOARD LINING, FLUSH SET
92mm STEEL STUD
13mm WATERPROOF PLASTERBOARD LINING, FLUSH SET

SCOPE LEGEND

 INCLUDED SCOPE

 MASTER PLANNED SCOPE
CONTRACTOR TO PROVIDE A 'BELOW THE LINE' COST FOR THESE WORKS SHOWN IN GREEN HATCH. THIS ADDITIONAL SCOPE MAY BE INCLUDED. THESE 'FUTURE' WORKS DO NOT FORM PART OF THE CORE SCOPE OF WORKS REQUIRED FOR THE STAGE 2 TAPE CONSOLIDATION.

GB - GARDEN BED. CONTRACTOR TO ALLOW FOR LANDSCAPE DESIGN AND INSTALL BASED OFF LANDSCAPE ARCHITECT'S PLANTING PALETTE

CEILING LEGEND

2700 ← CEILING HEIGHT ABOVE FFL
CT1 ← CEILING FINISHES

CEILING LEGEND

C/TI-01	1200x600 CEILING TILES
C/TI-02	1200x600 ACOUSTIC CEILING TILES
C/PB-S1	FLUSH SET PLASTERBOARD SHEETING
C/PB-S2	WATERPROOF PLASTERBOARD SHEETING
C/FC-01	FLUSH SET FIBRE CEMENT SHEETING


	GENERAL NOTE
--	--------------

- INSTALL NEW WALL LINING. MAKE GOOD.
 - CONTRACTOR TO CONFIRM EXISTING STRUCTURE & SERVICES ON SITE PRIOR BUILDING WORKS.
 - REFER TO CQU DESIGN GUIDELINES FOR DESIGN AND CONSTRUCTION REQUIREMENTS.
 - DRAWINGS TO BE READ IN CONJUNCTION WITH SERVICES, CIVIL AND STRUCTURAL DRAWINGS.
 - REFER TO ROOM LAYOUT SHEET FOR EXTENT OF WORK INCLUDING GLAZED DOOR AND TO REFER FOR ALL FURNITURE SETOUT
 - REFER TO OUTLINE SPECIFICATION & SCHEDULE FOR FR&E AND FINISHES
- DOOR NOTES**
- CQU TO CONFIRM ACCESS REQUIREMENT FOR STUDENT RECREATION SPACE
 - PROVIDE DOOR CLOSERS TO ALL DOORS ENCLOSING AIR-CONDITIONED SPACES
- CEILING NOTES**
- READ IN CONJUNCTION WITH SERVICE ENGINEERING DRAWINGS FOR MECHANICAL, FIRE, ELECTRICAL AND ALIKE.
 - SETOUT OF CEILING TILES TO BE CONFIRMED

INSULATION NOTE

- COMPLY WITH ACOUSTIC REPORT TO ACHIEVE THE NOMINATED ACOUSTIC RATING AND SECTION J REPORT FOR THE REQUIRED EXTERNAL WALLS R VALUES.
- COMPLY WITH THE CQU DESIGN GUIDELINES FOR MINIMUM ACOUSTIC SEPARATION BETWEEN ROOMS. WHERE THE ACOUSTIC REPORT NOMINATES HIGHER PERFORMANCE REQUIREMENTS, THE HIGHER RW RATINGS ARE TO APPLY.
- NEW STUD TO GO UP TO UNDERSIDE OF SLAB, UNLESS SPECIFIED.

SSUED FOR TENDER

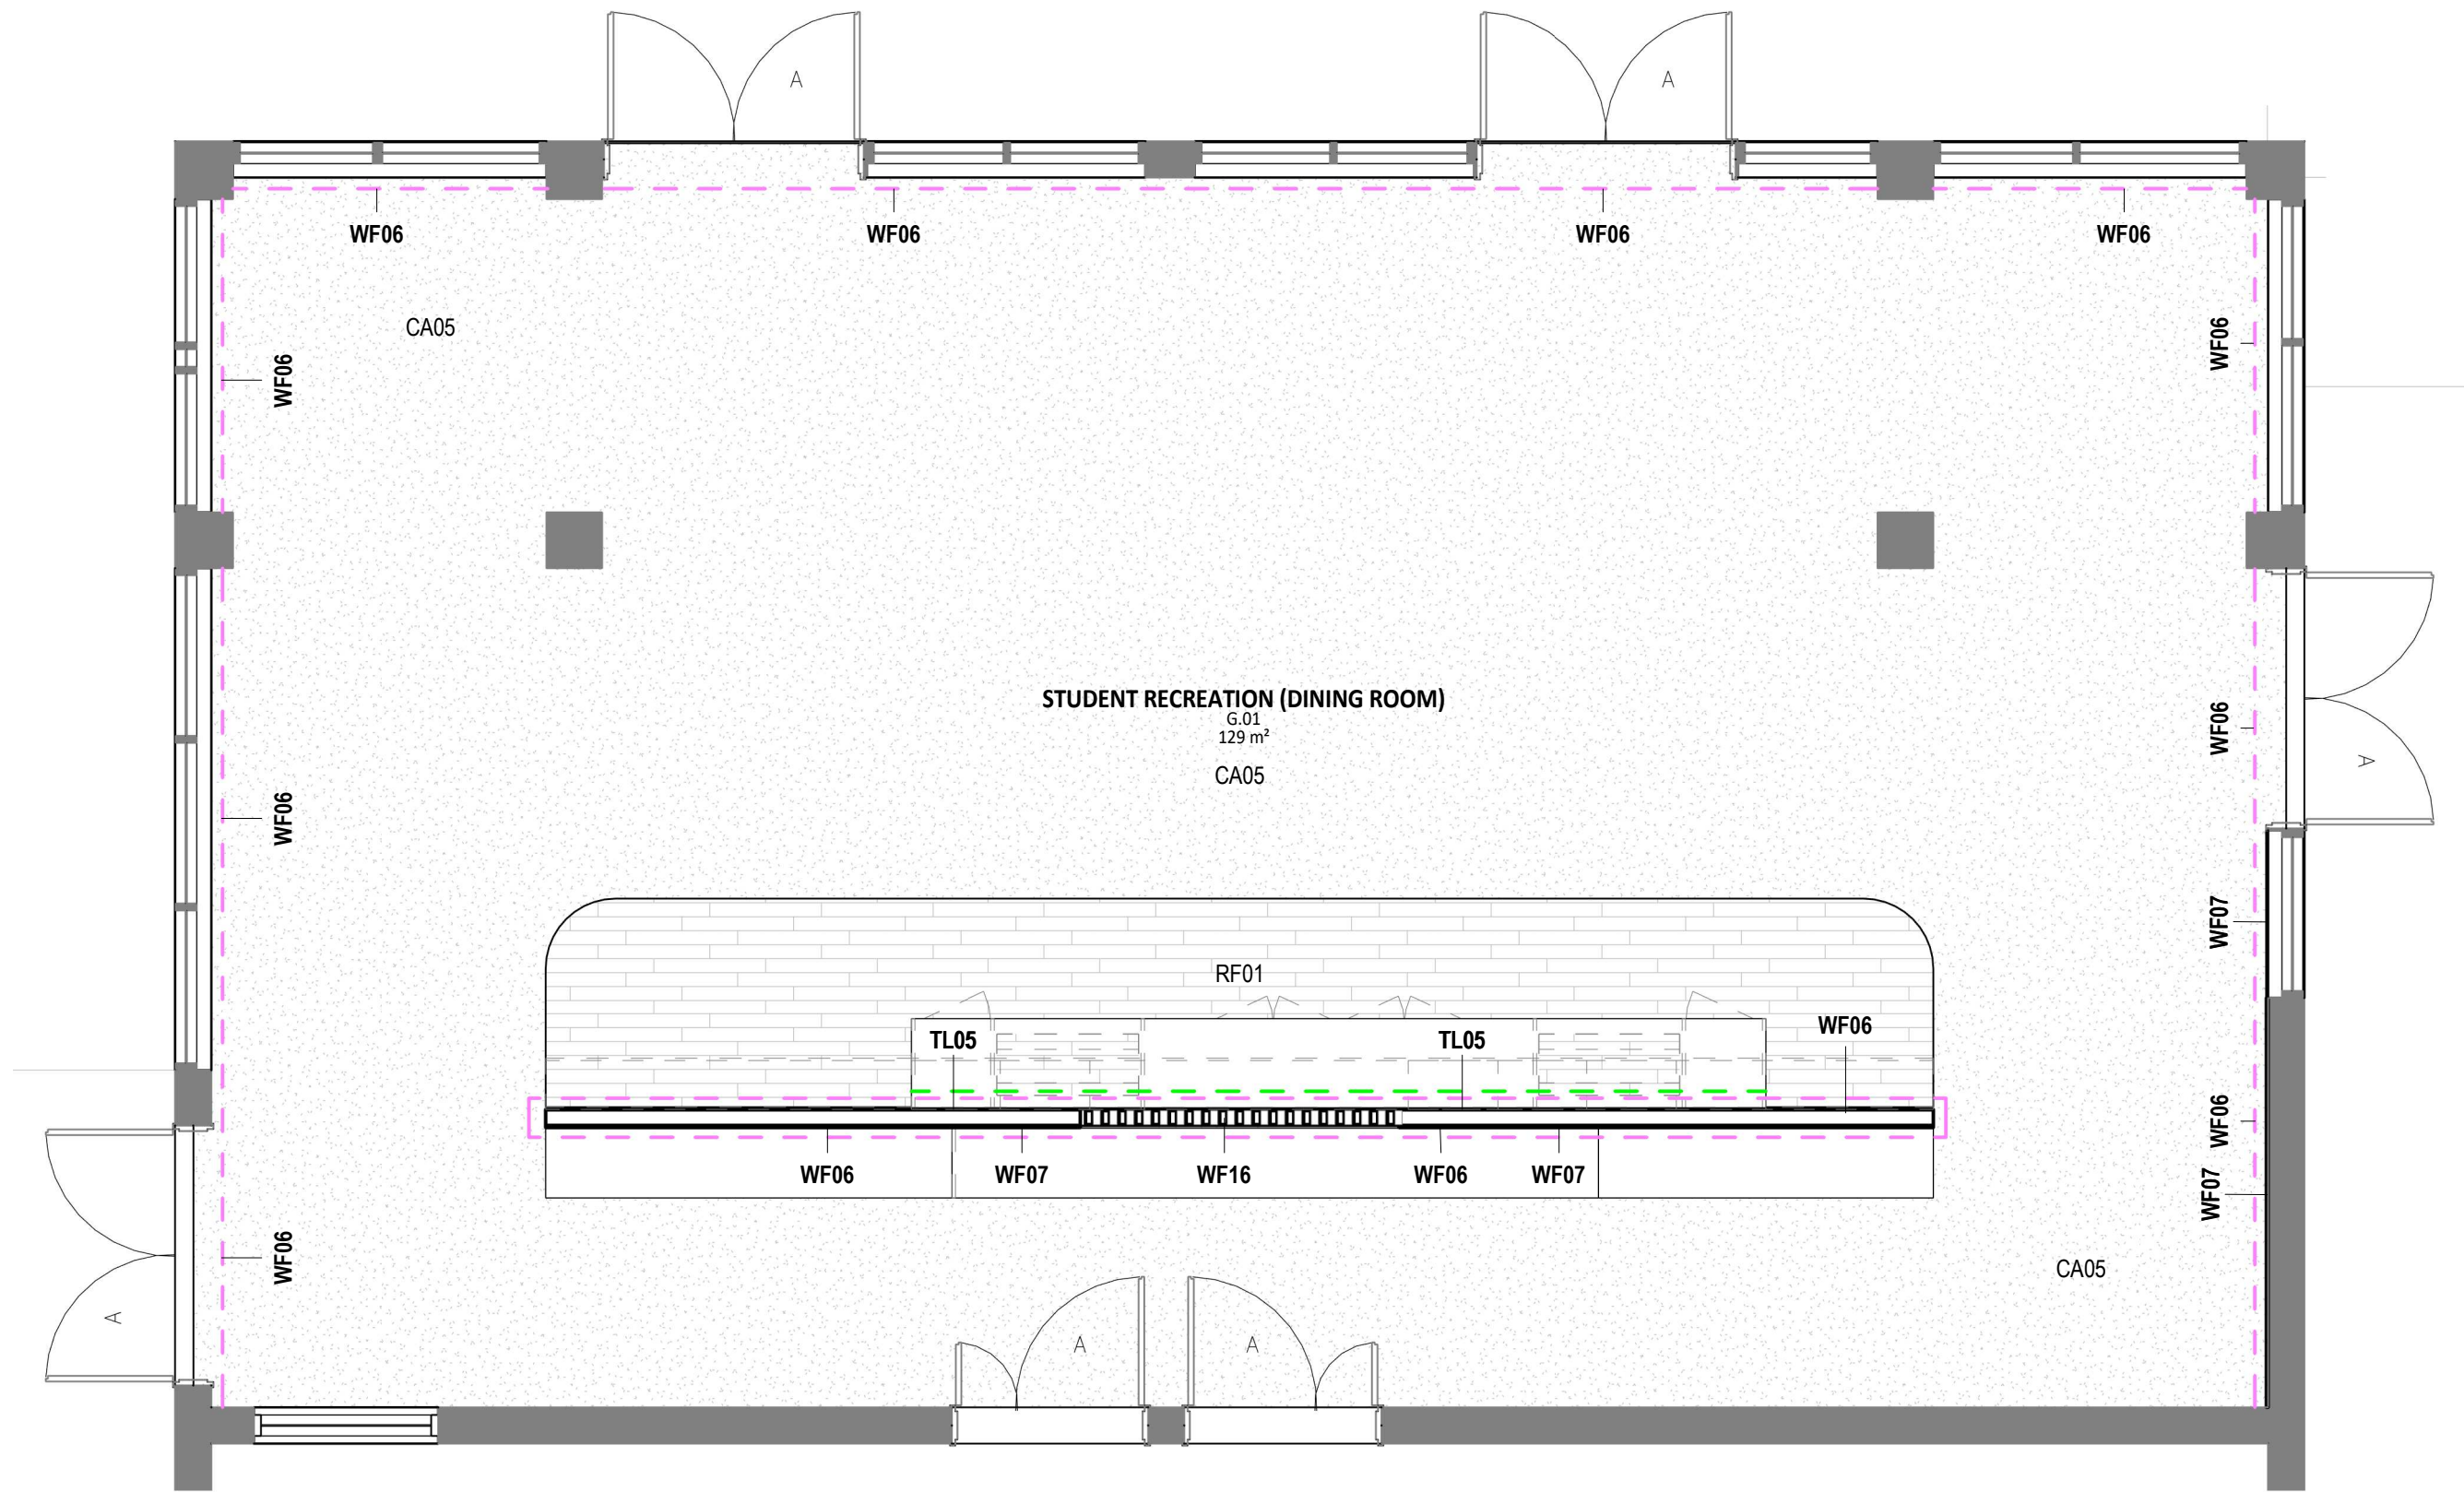

GENERAL NOTES:

- THIS DRAWING IS TO BE READ IN CONJUNCTION WITH ALL PROJECT DRAWINGS, SCHEDULES AND SPECIFICATIONS, PLUS ALL OTHER RELEVANT CONSULTANT DOCUMENTS.
- ALL WORKS TO COMPLY WITH BCA AND AUSTRALIAN STANDARDS.
- ANY DISCREPANCIES ON THE DRAWINGS OR IRREGULARITIES BETWEEN INFORMATION SHOWN ON INTERIOR DRAWINGS AND SERVICES CONSULTANTS DOCUMENTS ARE TO BE REFERRED TO THE DESIGNER FOR CLARIFICATION PRIOR TO THE WORKS PROCEEDING.
- ALL DIMENSIONS AND AREAS PROVIDED TO BE CONFIRMED ON SITE PRIOR TO COMMENCEMENT OF WORKS

FINISHES NOTES:

- ALL JUNCTIONS IN FLOOR FINISHES TO BE FLUSH.
- CHANGES TO FLOOR FINISH TO OCCUR UNDER THE CENTRE LINE OF THE DOOR LEAF UNLESS NOTED OTHERWISE.
- ALL WALLS TO BE PA01 UNLESS OTHERWISE NOTED.
- ALL SOLID CORE DOORS TO BE PA11 UNLESS OTHERWISE NOTED.
- REFER 60 SERIES DRAWINGS & SCH-INT-01 INTERIOR FINISHES SCHEDULE FOR SKIRTING TYPES AND SPECIFICATION. ALL WALLS TO RECEIVE SK01 SKIRTING UNLESS NOTED OTHERWISE.
- NEW SKIRTING TO MATCH EXISTING WHERE RELEVANT.
- ALL DOOR STATUTORY SIGNAGE AND ROOM SIGNAGE TO BE REMOVED BEFORE PAINTING.
- ALL WINDOW FURNISHING TO BE REMOVED BEFORE PAINTING, CLEANED AND REINSTALLED.
- FLOOR FINISHES TO CONTINUE UNDER NEW JOINERY.

FINISHES LEGEND

REFER SCH-INT-01 FINISHES SCHEDULE AND 60 SERIES DRAWINGS FOR FURTHER DETAILS AND SPECIFICATION

- PA## FEATURE WALL PAINT
- TL## WALL TILE
- WF## WALL FINISH
- CA## CARPET FLOOR FINISH
- RF## RESILIENT FLOOR FINISH
- TL## TILE FLOOR FINISH

ISSUE FOR TENDER

CQU ROCKHAMPTON
TAFE
CONSOLIDATION -
STAGE 2

ROCKHAMPTON, QUEENSLAND

for



A	12/02/26	ISSUED FOR TENDER	SM
1	30/01/26	60% DRAFT ISSUE	SM


rev	date	details	init.
-----	------	---------	-------

drawn	date
TA/PT	27/01/26
checked	date
SZ	27/01/26
verified	date
	27/01/26


scale

FINISHES PLAN - BLD34-GL


scale	project no.
As indicated @ A1	260018
revision	
A	
sheet no.	
CQU-ROK-034-GN-ARC-28-01	

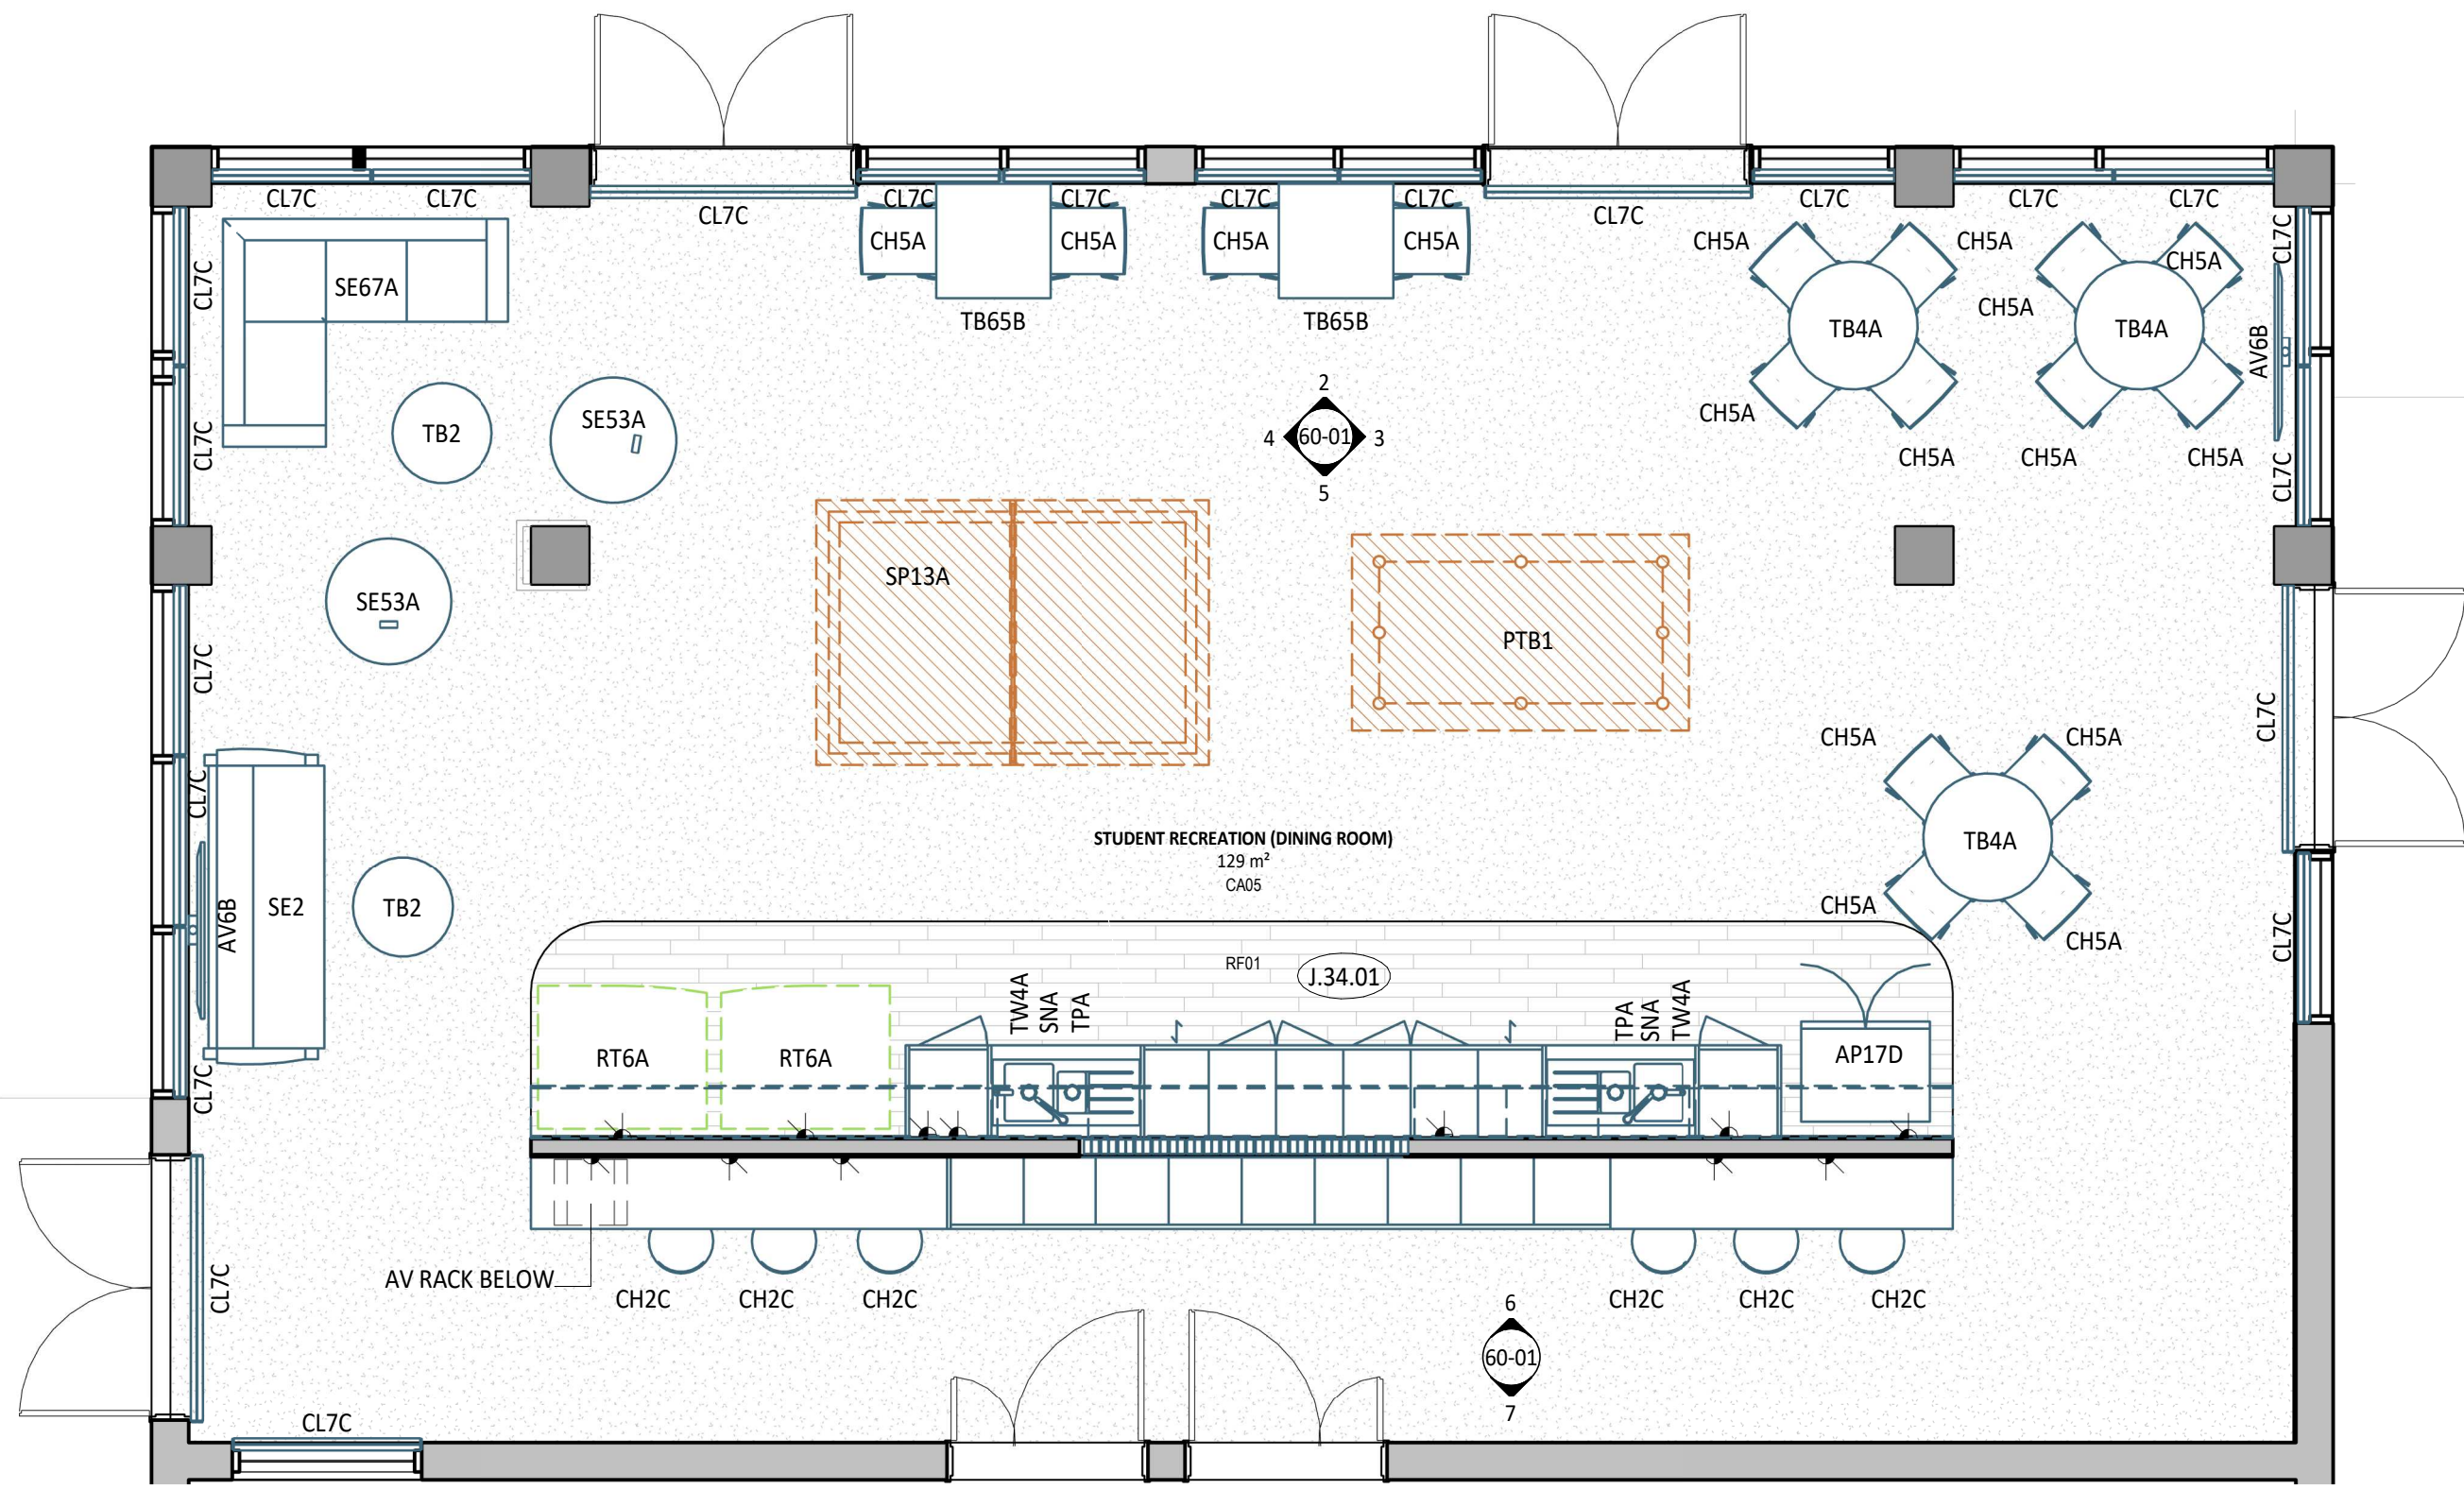


1 PLAN DETAIL
1 : 50

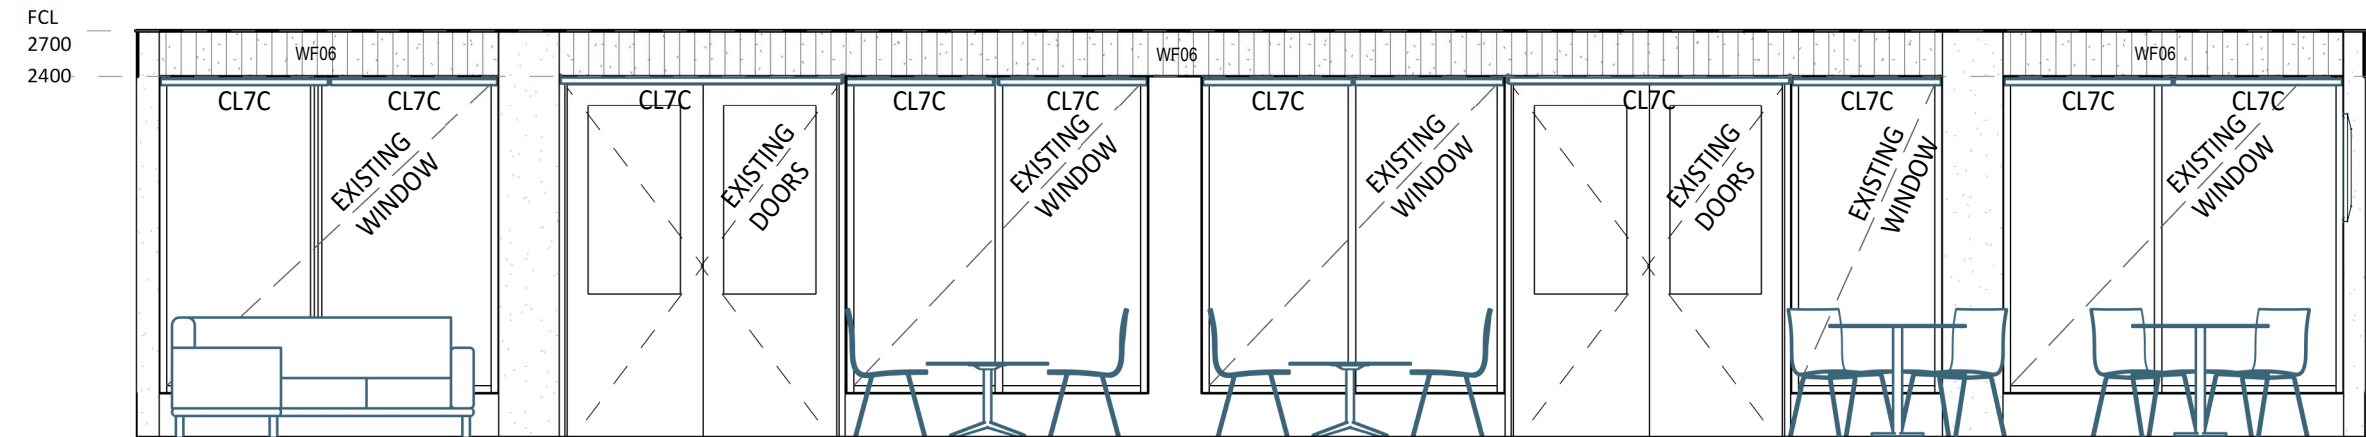

2 ELEVATION DETAIL
1 : 50

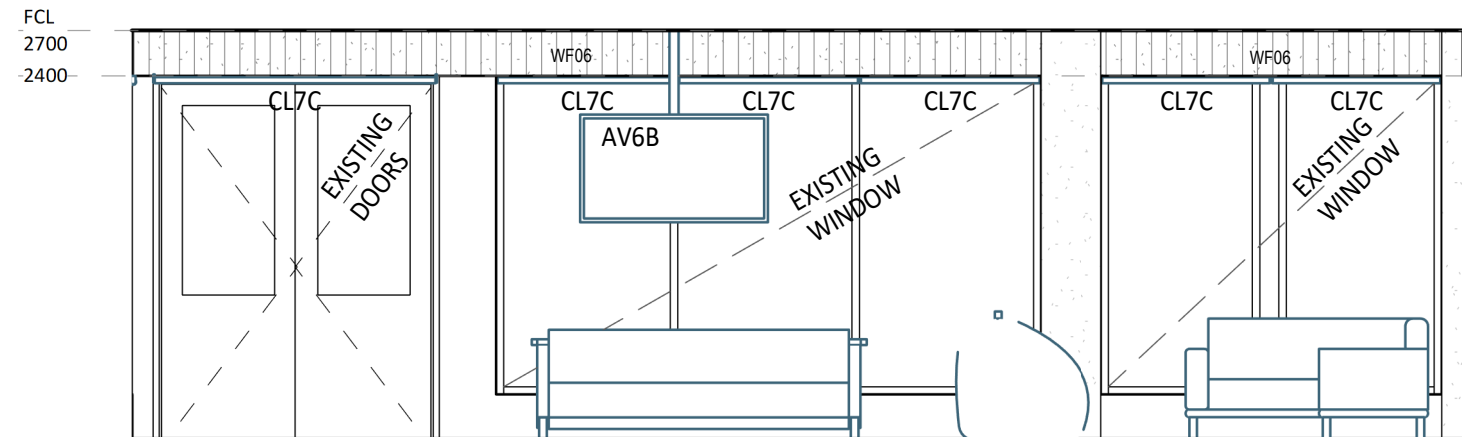

4 ELEVATION DETAIL
1 : 50

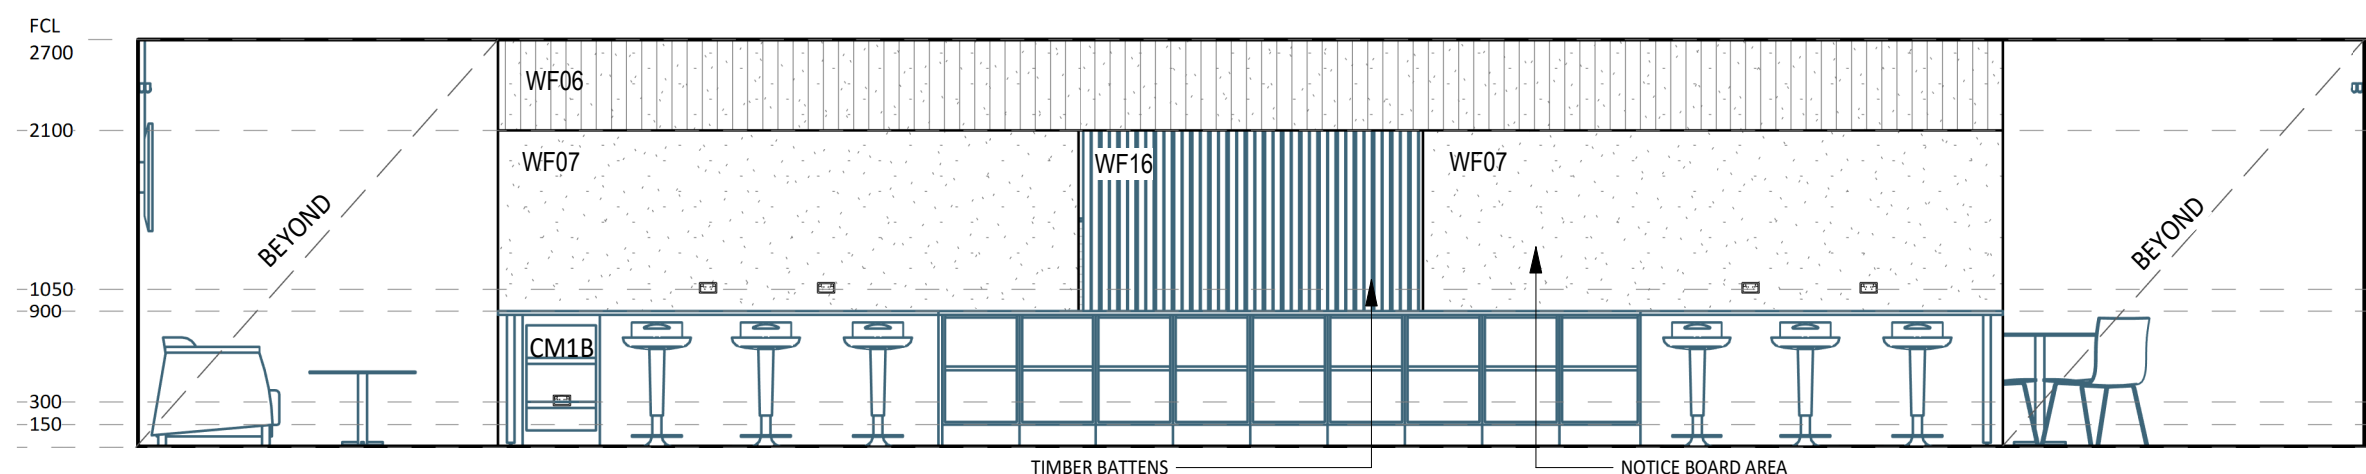

6 ELEVATION DETAIL
1 : 50

60-LEGEND JOINERY - BUILDING 34	
Joinery Code	Description
J.34.01	Benchtop, Underbench Cupboards, Knee Clearance Unit, Underbench Drawers, Underbench Bin Drawers, Overhead Shelvings, Bulkhead, Splashback
J.34.02	Benchtop, Underbench Cupboards, Full Height Shelving, Acoustic Pin Board Splashback

40-LEGEND FFE - STUDENT RECREATION (DININ...			
Z	Description	Group	Count
AP17D	Refrigerator - Freezer Below	1	1
AV6B	Ceiling Mounted Screen with Speakers	1	2
CH2C	Chair - Breakout	1	6
CH5A	Chair - Breakout	1	16
CL7C	Double Roller Blinds - Blockout	1	22
CM1B	AV Rack	1	1
SE2	Lounge - Three Seater Sofa	1	1
SE53A	Bean bag	1	2
SE67A	Lounge - L Shaped With Siderests	1	1
SNA	Sink - Accessible	1	2
TB2	Table - 700DIA x 500H - Round Coffee	1	2
TB4A	Table - 900DIA x 720H - Round Dining	1	3
TB65B	Table - Dining X Base - 800W x 800D x 720H	1	2
TPA	Mixer - Sink Accessible	1	2
TW4A	Tapware - Hot and Cold Water Boiling Unit	1	2
PTB1	Pool Table	2T	1
SP13A	Table - Table Tennis	2T	1
RT6A	Vending Machine - Snacks	3	2


FF&E LEGEND	
GROUP 1 ITEMS (PROVIDED & FITTED UNDER CONTRACT)	
GROUP 2 ITEMS (PROVIDED BY CLIENT & FITTED UNDER CONTRACT)	
GROUP 2T ITEMS - EXISTING EQUIPMENT (PROVIDED BY CLIENT & FITTED UNDER CONTRACT)	
GROUP 3 ITEMS (PROVIDED & INSTALLED BY CLIENT)	
PLANS TO BE PRINTED IN COLOUR	
SCH_Code	FF&E TAG
JO.PROC	JOINERY TAG

ELECTRICAL LEGEND	
SINGLE POWER OUTLET	LIGHT SWITCH
DOUBLE POWER OUTLET	TV
SINGLE DATA	
DOUBLE DATA	
REFER TO ELECTRICAL ENGINEER'S DRAWINGS FOR DETAILS	


- NOTE:**
- LOCATION OF EXISTING CROWD DJ AND SPEAKERS TO BE CONFIRMED
 - ALLOW FOR SKETCH DESIGN AND USER CONSULTATION TO FINALISE:
 - LIST OF EQUIPMENT TO BE TRANSFERRED FROM EXISTING LOCATION
 - EXTENT OF JOINERY
 - PLACEMENT OF JOINERY & FFE
 - ASSOCIATED POWER AND DATA REQUIREMENTS

- RLS NOTES**
- ALL ARCHITECTURAL DRAWINGS TO BE READ IN CONJUNCTION WITH OTHER DISCIPLINES.
 - REFER TO FF&E, SANITARYWARE SCHEDULES FOR ALL FURNITURE, FIXTURES, AND EQUIPMENT.
 - REFER TO HYDRAULIC ENGINEER'S DRAWINGS FOR HYDRAULIC SERVICES. FINISH OF VALVE/BOX COVERS TO MATCH ADJACENT WALL/JOINERY FINISH.
 - REFER TO ELECTRICAL DOCUMENTATION FOR OUTLET DETAILS (ie. POWER, DATA, COMMS etc.)
 - REFER TO AUDIO VISUAL DOCUMENTATION (VideoPro) FOR AV REQUIREMENTS AND DETAILS.
 - AV SUPPLIER TO CONFIRM EXACT POSITIONS OF EQUIPMENT ON SITE.
 - ALL FF&E ITEMS ARE TO BE READ IN CONJUNCTION WITH FF&E SCHEDULES AND CQU DESIGN MANUAL.
 - ALL FF&E AND TRANSFER ITEMS TO BE REVIEWED AND CONFIRMED WITH CLIENT PRIOR TO COMMENCING ON SITE.
 - PROVIDE ALLOWANCE AND ADD SUPPORT TO WALLS, WHERE FITTINGS ARE WALL MOUNTED. THIS INCLUDES BUT NOT LIMITED TO HANDBASINS, HANDRAILS, SCREENS, PROJECTORS, etc.
 - FF&E COUNT IS FOR INFORMATION ONLY. THE TOTAL NUMBER OF FF&E ITEMS ARE TO BE CONFIRMED WITH CLIENT AND ARCHITECTS BEFORE PURCHASE OF ITEMS.
 - CONFIRM ALL DIMENSIONS ON SITE FOR JOINERY ITEMS.
 - ALL SANITARY FIXINGS & FIXTURES IN PWD TOILETS TO BE INSTALLED IN ACCORDANCE WITH AS1428.1
 - ALLOW FOR FIRE EXTINGUISHERS & FIRE BLANKETS AS PER AS2444.2001
 - POWER AND DATA POINTS SHOWN ON THE ROOM LAYOUT SHEETS WERE SHOWN AND DISCUSSED DURING USER GROUP BRIEFING. THESE RELATE TO PARTICULAR EQUIPMENT THAT WAS DISCUSSED AS REQUIRING POWER AND DATA. THESE REFLECT STAKEHOLDER EXPECTATIONS FOR SPECIFIC POWER AND DATA POINTS AND HAVE REMAINED IN THE DOCUMENTATION AS A USEFUL REFERENCE FOR THE CONTRACTOR. THESE ARE NOT A COMPLETE QUANTITY AND SPECIFICATION OF POWER AND DATA. THE CONTRACTOR IS TO REFER TO ELECTRICAL ENGINEER'S DOCUMENTATION FOR ALLOWANCE. REFER TO ELECTRICAL DOCUMENTATION FOR AMPS AND 3 PHASE POWER REQUIREMENTS. REFER TO AUDIO VISUAL (VIDEOPRO) DOCUMENTATION FOR ADDITIONAL POWER AND DATA REQUIREMENTS
 - ALLOW FOR STRUCTURAL PLY BACKING BEHIND PLASTERBOARD FOR FULL EXTENT OF WALLS WITH MOUNTED AUDIO VISUAL EQUIPMENT. REFER TO AUDIO VISUAL (VIDEOPRO) DOCUMENTATION FOR LOCATIONS OF WALL MOUNTED EQUIPMENT.
 - ALLOW FOR PRIVACY FILM TO ALL INTERNAL GLAZING (DOORS AND WINDOWS) TO OFFICES AND MEETING ROOMS. CONFIRM SET OUT PRIOR TO INSTALLATION
 - ALLOW FOR DOUBLE BLOCK OUT BLINDS TO ALL WINDOWS UNLESS NOTED OTHERWISE
 - ALL INTERNAL DOORS ARE TO BE SOLID CORE DOORS WITHIN ALUMINIUM FRAMED SUITES UNLESS NOTED OTHERWISE.
 - FLOOR BOXES MUST BE COORDINATED WITH BOTH THE STRUCTURAL AND ELECTRICAL ENGINEERS. BEFORE ANY CUTTING OF THE EXISTING SLAB OCCURS, CONFIRM THE EXACT LOCATIONS AND REQUIREMENTS WITH THE STRUCTURAL ENGINEER.
 - HEARING AUGMENTATION TO AUSTRALIAN STANDARDS - REFER VIDEOPRO AND ELECTRICAL SPECIFICATION

3 ELEVATION DETAIL
1 : 50

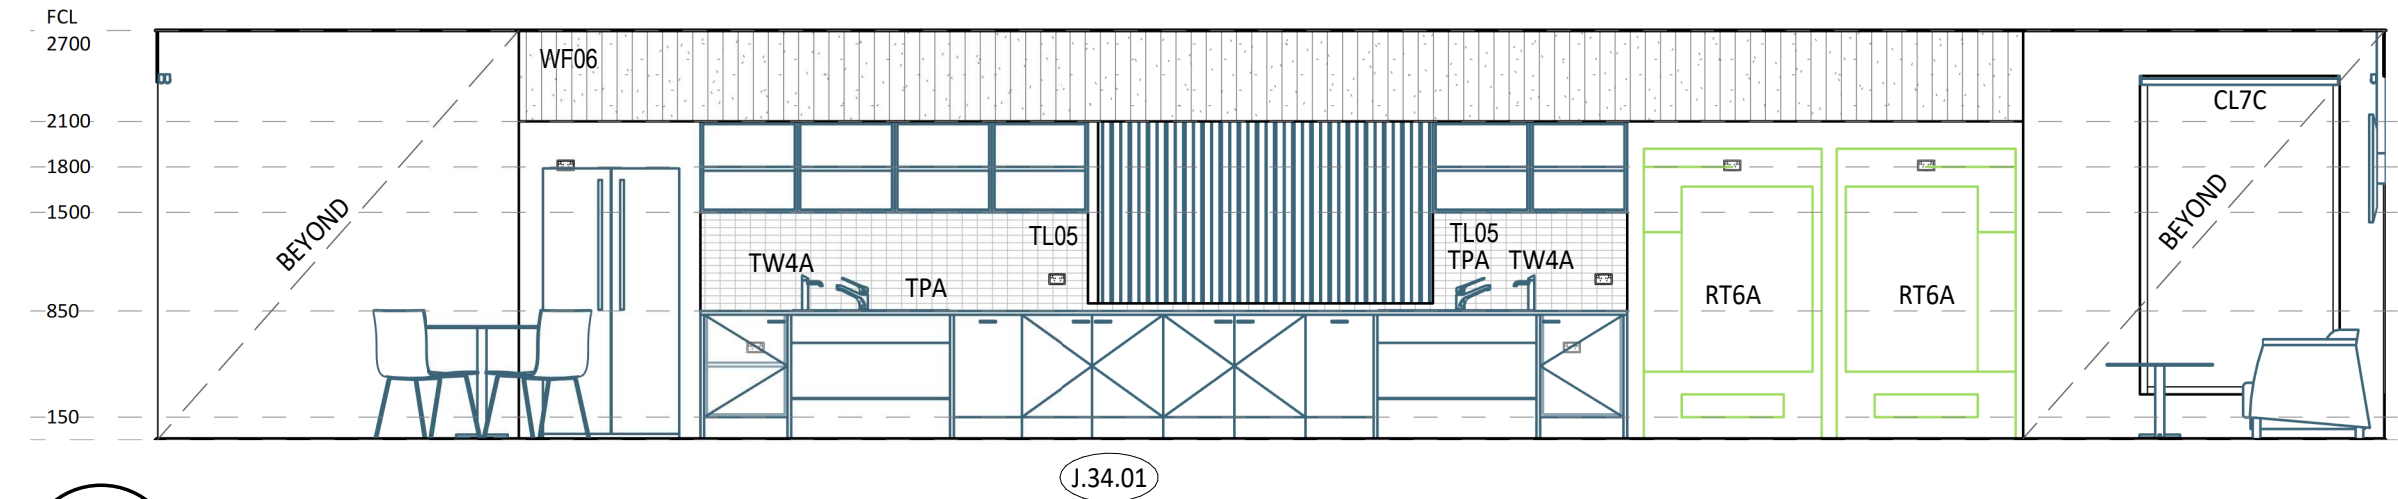

5 ELEVATION DETAIL
1 : 50

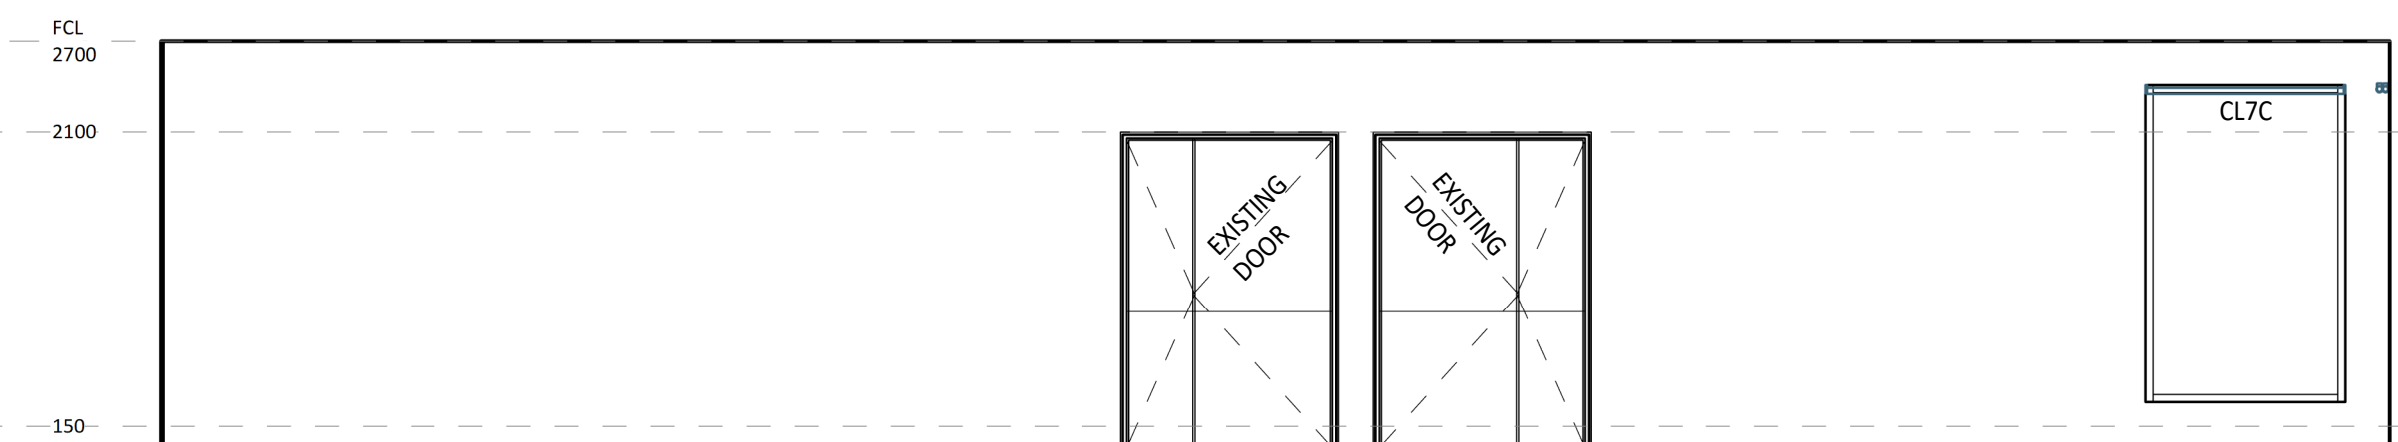

7 ELEVATION DETAIL
1 : 50

A	12/02/26	ISSUED FOR TENDER	SM
2	30/01/26	60% DRAFT ISSUE	SM
1	23/01/26	FOR COORDINATION ISSUE	JT
rev/	date	details	init.

drawn	date
TA/PT	12/02/26
checked	date
JT/RJ	12/02/26
verified	date
JT/RJ	12/02/26

scale

**RLS - BLD34-GL - STUDENT
RECREATION (DINING
ROOM)**

scale project no.
1 : 50 @ A1 260018

revision
A
sheet no.
CQU-ROK-034-GN-ARC-60-01

ISSUE FOR TENDER



JOINERY CODE: J.34.01
ROOM / AREA: : Student Recreation (Dining Room)

FINISHES:		
Item	Finish	Code
Bench Top	Stone Finish	ST02
Splashback	Tiled	TL07
Open Shelving & Exposed Panels/Gables (Above Bench)	Laminate - Type 1	LM01
Door / Drawer Fronts & Exposed Panels/Gables (Below Bench)	Laminate - Type 11	LM11
Kick Board	Laminate - Type 11	LM11

JOINERY CODE: J.34.01
ROOM / AREA: : Student Recreation (Dining Room)

FINISHES:		
Item	Finish	Code
Bench Top	Stone Finish	ST02
Open Shelving & Exposed Panels/Gables (Below Bench)	Laminate - Type 1	LM01
Kick Board	Laminate - Type 1	LM01

DESCRIPTION:
Allow for integrated LED strip lighting to the underside of over head shelving
Allow to install a timber batten screen as specified in the Interiors Finishes Schedule
Allow for a tiled splash back and a 100 mm up stand / wipe strip of (bench top material) to the rear of all the bench tops.
Allow for a circular stainless steel leg (x2) to the ends of the bench seating areas

thomson
adsett

 **PEDDLE THORP**
architecture | interiors | health | planning

Telephone +61 7 3840 9999
bne@thomsonadsett.com
Level 9, 470 St Pauls Terrace
Fortitude Valley
Qld 4006 Australia
thomsonadsett.com

© Copyright
These drawings and designs and the copyright thereof are the property of Thomson Adsett Pty Ltd and must not be used, retained or copied without written permission of Thomson Adsett Pty Ltd. ABN 76 105 314 654 Trading as ThomsonAdsett. Dimensions take precedence over scaling. Do not measure off drawings as print sizes may vary

CQU ROCKHAMPTON
TAFE
CONSOLIDATION -
STAGE 2
ROCKHAMPTON, QUEENSLAND



A	12/02/26	ISSUED FOR TENDER	SM
rev	date	details	init.

drawn	date
TA/PT	
checked	date
SZ	
verified	date

scale

**BLD34-GL - KEY JOINERY
INTENT - STUDENT
RECREATION**

scale	project no.
@ A1	260018
revision	
A	
sheet no.	
CQU-ROK-034-GN-ARC-70-01	

ISSUE FOR TENDER