




CQU ROCKHAMPTON TAFE CONSOLIDATION - STAGE 2


554/700 Yaamba Rd, Norman
Gardens QLD 4701

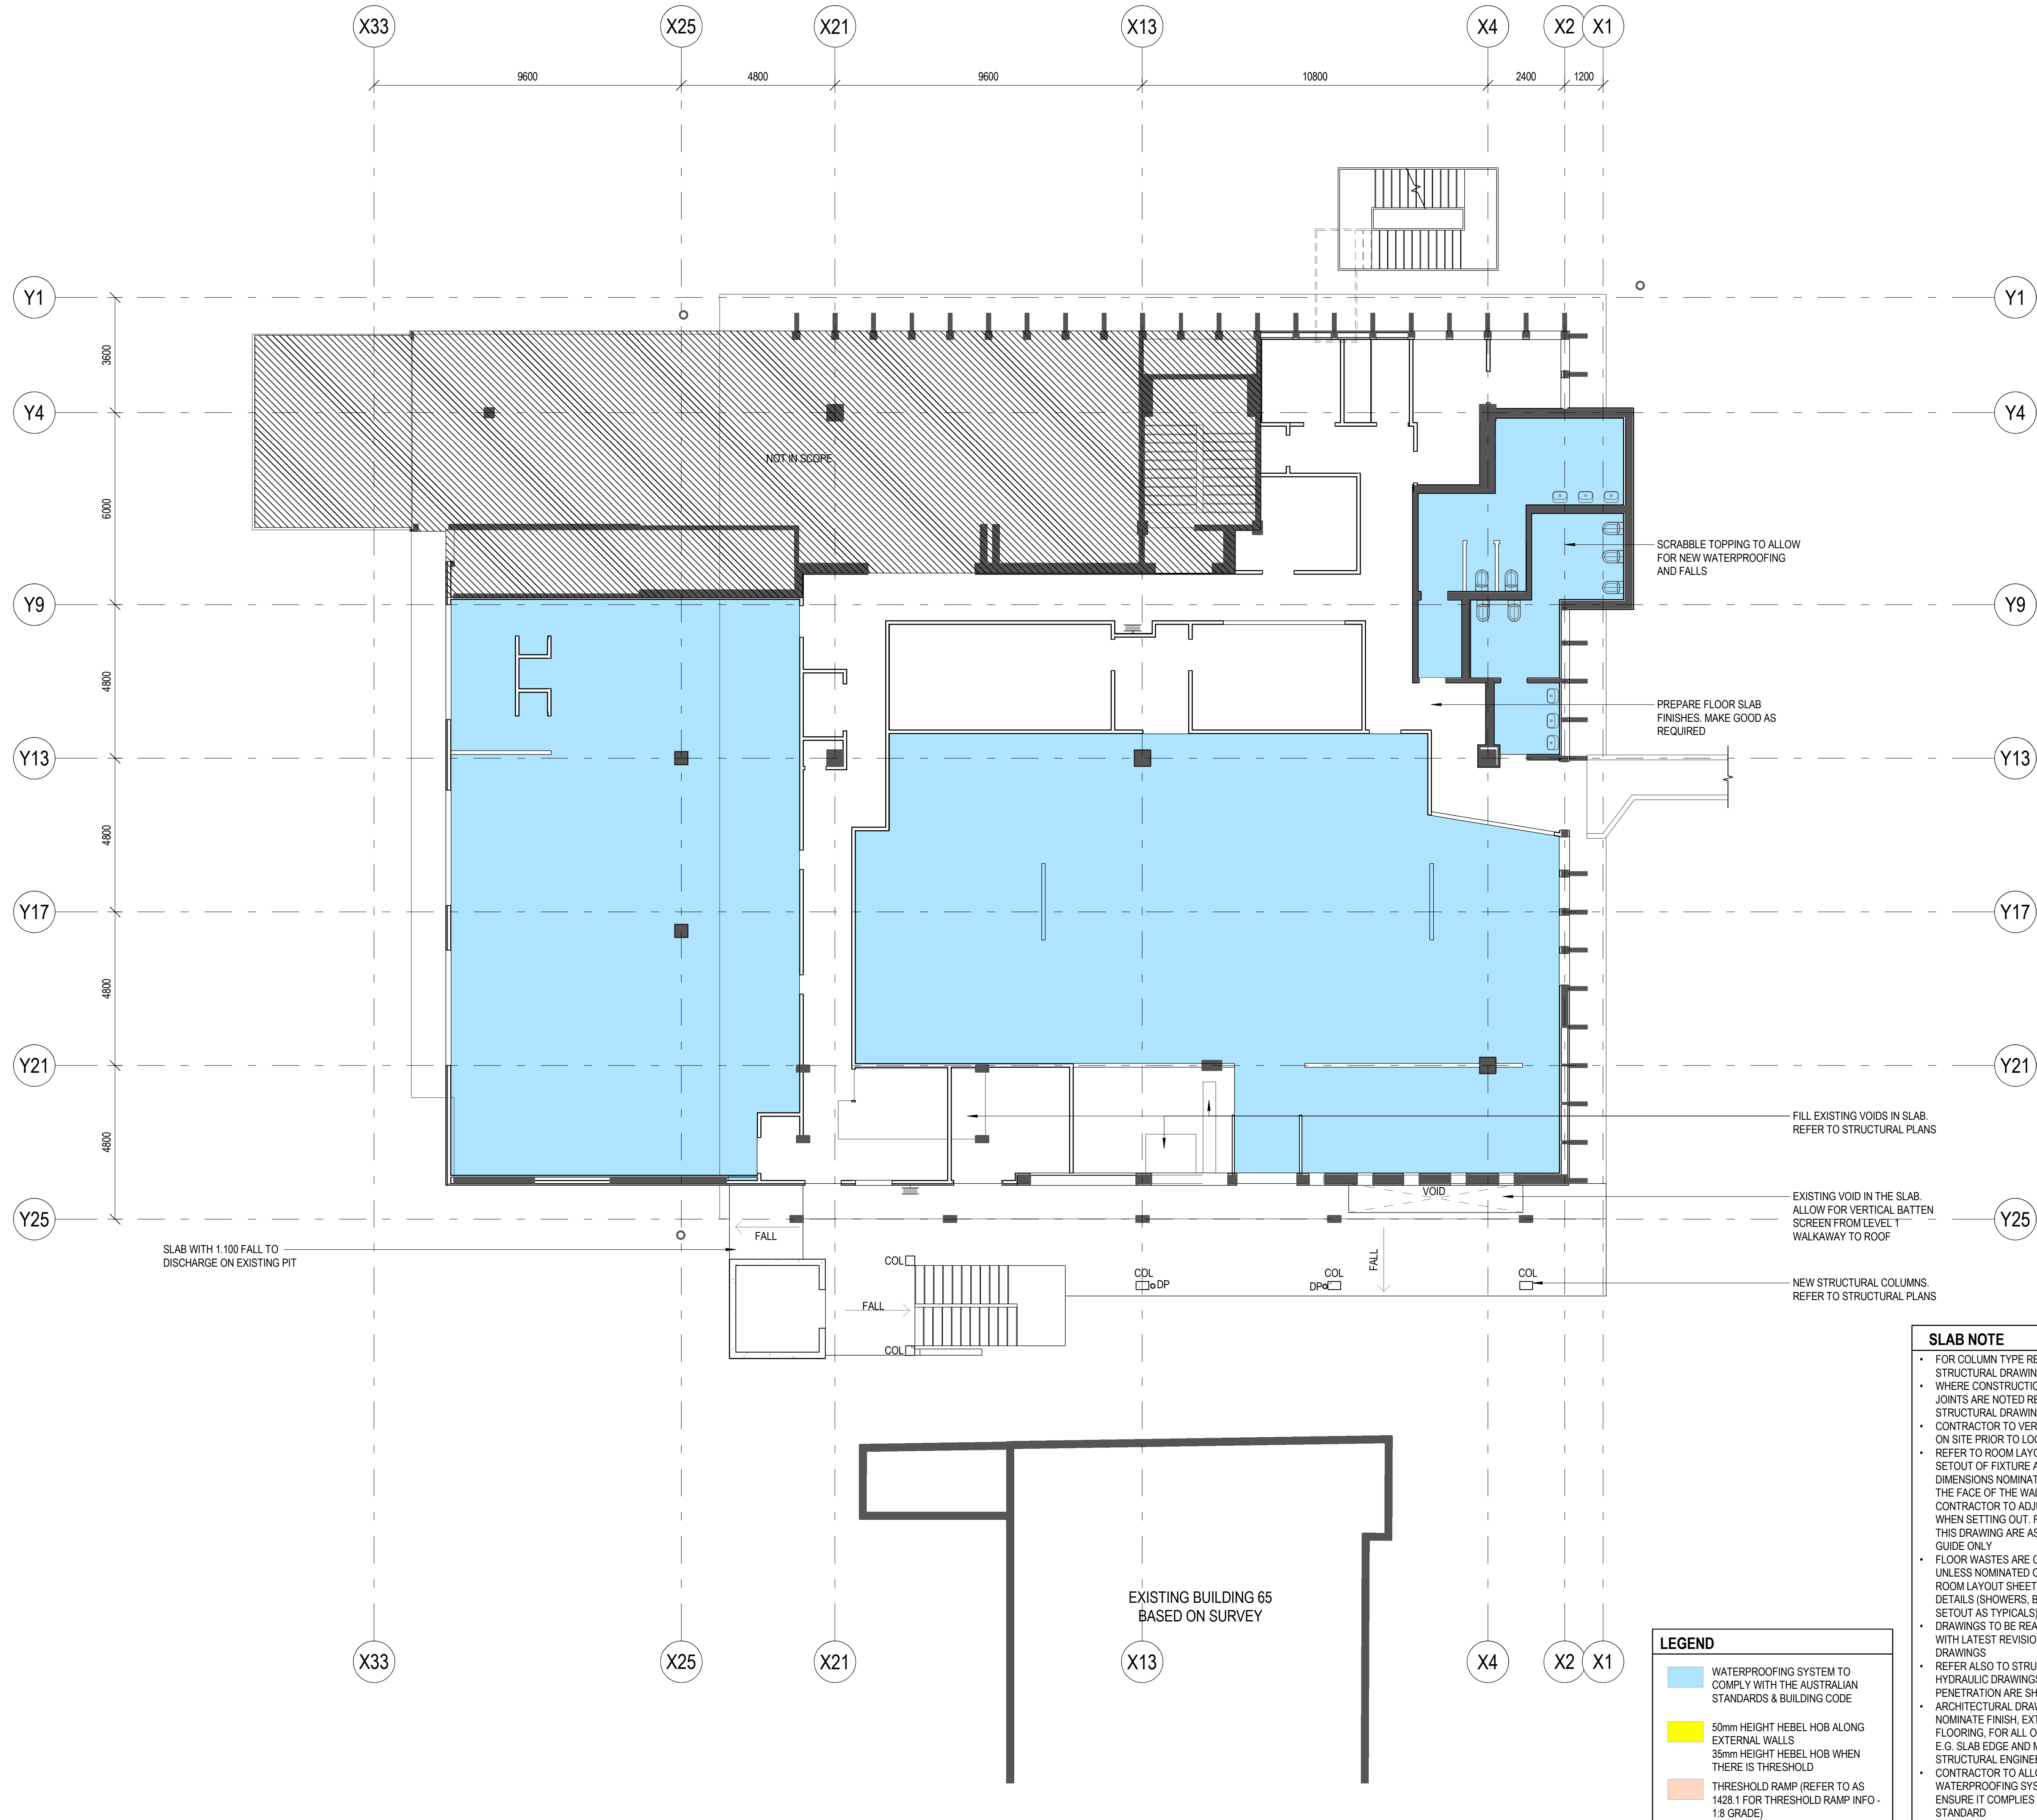

B	2026-03-05	UPDATED ISSUED FOR TENDER	BC
A	2026-02-12	ISSUED FOR TENDER	BC
1	2026-01-30	60% DRAFT ISSUE	BC

rev	date	details	init.
-----	------	---------	-------

drawn	date
JS/BC	19/01/2026
checked	date
SS	12/02/2026
verified	date

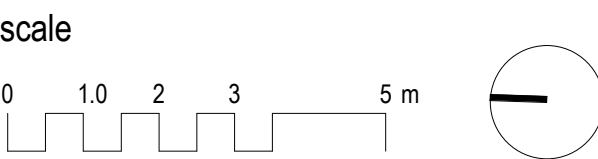

SLAB PLAN - LEVEL 1

scale	project no.
1 : 100 @ A1	25.0236.17

revision	
B	
sheet no.	
CQU-ROK-036-01-ARC-23-02	

ISSUED FOR TENDER

LEGEND	
	WATERPROOFING SYSTEM TO COMPLY WITH THE AUSTRALIAN STANDARDS & BUILDING CODE
	50mm HEIGHT HEBEL HOB ALONG EXTERNAL WALLS 35mm HEIGHT HEBEL HOB WHEN THERE IS THRESHOLD
	THRESHOLD RAMP (REFER TO AS 1428.1 FOR THRESHOLD RAMP INFO - 1:8 GRADE)

- SLAB NOTE**
- FOR COLUMN TYPE REFER TO STRUCTURAL DRAWINGS
 - WHERE CONSTRUCTION MOVEMENT JOINTS ARE NOTED REFER TO STRUCTURAL DRAWINGS FOR TYPE
 - CONTRACTOR TO VERIFY ALL DIMENSIONS ON SITE PRIOR TO LOCATING SERVICES
 - REFER TO ROOM LAYOUT SHEETS FOR SETOUT OF FUTURE AND FITTINGS - RLS DIMENSIONS NOMINATE THE FITTING TO THE FACE OF THE WALL LINING. CONTRACTOR TO ADJUST AS REQUIRED WHEN SETTING OUT. FITTINGS SHOWN ON THIS DRAWING ARE AS A REFERENCE GUIDE ONLY
 - FLOOR WASTES ARE CENTRE OF ROOM UNLESS NOMINATED OTHERWISE ON THE ROOM LAYOUT SHEETS OR TYPICAL DETAILS (SHOWERS, BASINS WILL ALL BE SETOUT AS TYPICALS)
 - DRAWINGS TO BE READ IN CONJUNCTION WITH LATEST REVISION OF HYDRAULIC DRAWINGS
 - REFER ALSO TO STRUCTURAL AND HYDRAULIC DRAWINGS. NOT ALL PENETRATION ARE SHOWN HERE
 - ARCHITECTURAL DRAWINGS WILL NOMINATE FINISH, EXTENT AND HEIGHT OF FLOORING, FOR ALL OTHER INFORMATION E.G. SLAB EDGE AND MATERIAL REFER TO STRUCTURAL ENGINEER DRAWINGS
 - CONTRACTOR TO ALLOW FOR WATERPROOFING SYSTEM TO WET AREA. ENSURE IT COMPLIES WITH AUSTRALIAN STANDARD