DO NOT SCALE

GENERAL NOTES

1 THESE DRAWINGS SHALL BE READ IN CONJUNCTION WITH THE CONTRACT DOCUMENTS (INCLUDING ALL ARCHITECTURAL AND OTHER CONSULTANTS' DRAWINGS AND SPECIFICATIONS) AND WITH SUCH OTHER WRITTEN INSTRUCTIONS AS MAY BE ISSUED DURING THE COURSE OF THE CONTRACT.

2 ANY DISCREPANCY ON THE DRAWINGS OR BETWEEN THE DRAWINGS AND/OR THE SPECIFICATION AND/OR THE SPECIFIED AUSTRALIAN STANDARD SHALL BE REFERRED TO WSP AND A WRITTEN INSTRUCTION RECEIVED PRIOR TO PROCEEDING WITH THE WORK. DURING TENDERING THE TENDERER SHALL ASSUME THE LARGER/GREATER CRITERIA IN TERMS OF COST IN THE ABSENCE OF OTHER INSTRUCTIONS.

3 CONTRACTOR AND SUB-TRADES SHALL EXERCISE GOOD INDUSTRY PRACTICE AND COMPLY WITH THE NCC AND AUSTRALIAN STANDARDS WHEN CARRYING OUT THE WORKS. WORKMANSHIP AND MATERIALS SHALL BE IN ACCORDANCE WITH THE REQUIREMENTS OF THE RELEVANT NCC REQUIREMENTS AND RELEVANT CURRENT AUSTRALIAN STANDARDS INCLUDING ALL AMENDMENTS, AND THE REQUIREMENTS OF THE LOCAL STATUTORY AUTHORITIES.

4 CONTRACTOR AND SUB-TRADES SHALL DETERMINE, CONTROL AND RETAIN RESPONSIBILITY FOR ALL CONSTRUCTION ACTIVITIES, METHODS, TECHNIQUES, SEQUENCES AND PROCEDURES AS WELL AS QUANTITIES OF MATERIALS AND DIMENSIONS OF WORK TO ENSURE DESIGN INTENT AND COMPLIANCE WITH THE NCC AND AUSTRALIAN STANDARDS.

5 ANY SHOP DRAWING REVIEWS BY WSP ARE NOT FULL REVIEWS GIVEN RESOURCE/ TIME RESTRAINTS AND ARE LIMITED TO THE PURPOSES NOTIFIED IN THE TRANSMITTAL OF SHOP DRAWING(S). SHOP DRAWING REVIEWS ARE LIMITED TO A DESKTOP REVIEW TO IDENTIFY OBVIOUS ERRORS AND ASSUMES THE PREPARATION OF THE SHOP DRAWING BY OTHER PARTIES INCLUDES PROPER ANALYSIS, CALCULATIONS AND/OR MODELLING FOR COMPLIANCE WITH RELEVANT NCC AND AUSTRALIAN STANDARDS.

6 ANY SHOP DRAWING REVIEW BY WSP ASSUMES NO CHANGE WAS MADE IN THE PREPARATION OF THE SHOP DRAWINGS WHICH RENDER THE ORIGINAL WSP DESIGN NON-COMPLIANT. SHOP DRAWING REVIEWS BY WSP DOES NOT RELEASE THE CONTRACTOR AND SUB-TRADES OF ITS RESPONSIBILITY TO LIAISE DIRECTLY WITH THE PARTIES RESPONSIBLE FOR PREPARATION OF THE SHOP DRAWING.

7 ALL SHOP DRAWINGS SHALL BE READ IN CONJUNCTION WITH THE CONTRACT DOCUMENTS (INCLUDING ALL ARCHITECTURAL AND OTHER CONSULTANTS' DRAWINGS AND SPECIFICATIONS) AND OTHER WRITTEN INSTRUCTIONS AS MAY BE ISSUED DURING THE COURSE OF THE DESIGN. IF THERE IS A DISCREPANCY ON THE SHOP DRAWINGS OR BETWEEN THE SHOP DRAWINGS AND/OR THE SPECIFICATION AND/OR THE SPECIFIED AUSTRALIAN STANDARD, ASSUME THE APPLICATION OF THE HIGHER OR MORE ONEROUS CRITERIA.

8 THESE DRAWINGS SHOW TYPICAL DETAILS ONLY. THE PARTIES RESPONSIBLE FOR PREPARATION OF THE SHOP DRAWINGS IS REQUIRED TO DEVELOP ALL RELEVANT DETAILS NOT SPECIFICALLY SHOWN AND ARE WHOLLY RESPONSIBLE FOR CORRECTNESS OF THEIR DESIGN AND NO REVIEW OR APPROVAL BY WSP IS TO BE RELIED UPON

9 WHERE SHOP DRAWINGS ARE RELIANT ON CRITICAL DIMENSIONS, THESE SHALL BE OBTAINED FROM SITE MEASUREMENTS AND/OR SHOP DRAWINGS PRODUCED BY OTHER TRADES AND CLEARLY SHOWN ON THE RESULTANT SHOP DRAWINGS.

10 ANY PRODUCT OR EQUIPMENT SPECIFIED IN THE PLANS, SPECIFICATION OR ELSEWHERE IS BASED UPON MATERIAL DATA ISSUED BY THE MANUFACTURER. THE CONTRACTOR AND SUB-TRADES ARE REQUIRED TO VERIFY THE SUITABILITY OF THE SPECIFIED OR SELECTED PRODUCT(S) AND SEEK ALTERNATIVES IF NECESSARY.

11 ALL DIMENSIONS ARE IN MILLIMETRES UNLESS NOTED OTHERWISE. ALL LEVELS ARE IN METRES UNLESS NOTED OTHERWISE.

12 ALL DIMENSIONS RELEVANT TO SETTING OUT AND OFF-SITE WORK SHALL BE VERIFIED BY THE CONTRACTOR BEFORE CONSTRUCTION OR FABRICATION IS COMMENCED. THE WSP DRAWINGS SHALL NOT BE SCALED. DIMENSIONS RELEVANT TO SETTING OUT SHOULD BE TAKEN FROM ARCHITECTURAL AND/OR LANDSCAPE DRAWINGS. DRAWINGS BY WSP MAY NOT SHOW EQUIPMENT TO SCALE AND MAY NOT BE FULLY COORDINATED WITH ALL OTHER SERVICES.

13 FOR STRUCTURAL SERVICES THE DRAWINGS CONSTITUTE THE MAIN STRUCTURAL FRAMING ONLY AND DO NOT INCLUDE A FULL SCOPE OF SECONDARY ELEMENTS TO SUPPORT FACADE CLADDING, HANDRAILS, INTERNAL PARTITION WALLS, ETC.

14 THE STRUCTURAL DRAWINGS DO NOT SHOW ALL DETAILS OF FIXTURES, INSERTS, SLEEVES, OPENINGS, ETC. REQUIRED BY THE VARIOUS TRADES. ALL SUCH DETAILS, INCLUDING OPENINGS FOR CONSTRUCTION PURPOSES, MUST BE APPROVED BY WSP BEFORE PROCEEDING WITH CONSTRUCTION.

15 DURING CONSTRUCTION THE CONTRACTOR SHALL BE RESPONSIBLE FOR MAINTAINING THE STRUCTURE AND ADJACENT STRUCTURES IN A STABLE CONDITION AND ENSURING NO PART SHALL BE OVERSTRESSED UNDER CONSTRUCTION ACTIVITIES. THE CONTRACTOR SHALL PROVIDE ALL TEMPORARY BRACING AND/OR PROPPING AS NECESSARY, INCLUDING ANY TEMPORARY SUPPORT FOR EXCAVATIONS.

16 ALL PROPS AND FORMWORK FOR FLOOR BEAMS AND SLABS SHALL BE REMOVED BEFORE CONSTRUCTION OF ANY MASONRY WALLS OR PARTITIONS ON THE FLOOR.

17 THE CONTRACTOR SHALL ENSURE THAT ALL STRUCTURAL MEMBERS AND/OR COMPONENT MATERIALS ARE PROTECTED FROM THE WEATHER AND THAT STRUCTURAL PROPERTIES ARE NOT IMPAIRED IN ANY WAY DURING THE CONSTRUCTION PERIOD.

18 THE APPROVAL OF A SUBSTITUTION SHALL BE SOUGHT FROM WSP. APPROVAL BY WSP OF AN ALTERNATIVE IS NOT AN AUTHORIZATION FOR A COST VARIATION. ANY CLAIM FOR A COST VARIATION MUST BE SUBMITTED TO WSP AND THE CLIENT/CLIENT REPRESENTATIVE BEFORE THE WORK COMMENCES.

19 ALL PENETRATIONS AND/OR SET DOWNS SHOWN ON STRUCTURAL DRAWINGS ARE INDICATIVE ONLY. THE CONTRACTOR SHALL COORDINATE ALL SERVICES AND ENSURE THAT THE FINAL LOCATION AND SIZE OF PENETRATIONS AND/OR SET DOWNS ARE CONFIRMED BY THE APPROPRIATE SUB-CONTRACTOR. FINAL DETAILS ARE TO BE SUBMITTED TO WSP FOR APPROVAL PRIOR TO CONSTRUCTION.

20 ALL PROPRIETY PRODUCTS SPECIFIED ON THESE DRAWINGS SHALL BE USED STRICTLY IN ACCORDANCE WITH THE MANUFACTURER'S SPECIFICATIONS. ALTERNATIVE PRODUCTS MAY ONLY BE USED WITH THE APPROVAL OF WSP, FOLLOWING SUBMISSION OF EVIDENCE OF EQUIVALENCE.

21 ALL NON-LOADBEARING WALLS SHALL BE KEPT 20mm CLEAR OF THE UNDERSIDE OF SLABS AND BEAMS UNLESS NOTED OTHERWISE.

22 GENERALLY THE FOLLOWING INFORMATION WILL NOT BE SHOWN ON WSP DRAWINGS: NON-STRUCTURAL INCLUSIONS OR CAST-IN FIXINGS, E.G. COLUMN GUARDS, LOCATION AND DETAILS OF FIXINGS FOR BRICKWORK, BLOCKWORK, CLADDING, DOORS, WINDOWS ETC. (FIXINGS MAY BE SHOWN IN SITUATIONS OF ABOVE NORMAL COMPLEXITY AND WHERE THEY ARE ESSENTIAL TO THE STRUCTURAL STABILITY), CHAMFERS, ARRISE, CHASES AND REBATES FOR DRIPS, ARCHITECTURAL DETAILS, ETC. CAST-IN SOCKETS, BOLTS OR STUDS FOR FIXING PIPEWORK, DUCTWORK ETC. CONCRETE KERBS, SLOPES, FLOOR DRAINS. DETAILS FOR DAMP-PROOFING AND WATERPROOFING MEMBRANES, SEALANTS, DETAILS OF FIRE PROTECTION SYSTEMS ETC. OTHER THAN THOSE SHOWN ON STRUCTURAL DRAWINGS. THIS INFORMATION MAY BE FOUND ON BUILDERS WORK DRAWINGS PREPARED BY THE ARCHITECT, BUILDING SERVICES ENGINEERS OR SPECIALIST SUPPLIER OR SUBCONTRACTOR. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO OBTAIN AND CO-ORDINATE THIS INFORMATION AND TO ENSURE THAT ALL NECESSARY PROVISIONS ARE ACCOMMODATED.

23 ONLY THE CRANE AND PLANT LOADS SPECIFIED ON THE DRAWINGS HAVE BEEN ALLOWED FOR. ANY ADDITIONAL CRANES OR PLANT AREAS HAVE HAD NO SPECIAL ALLOWANCE MADE IN THE DESIGN OF THE STRUCTURE. REFERENCE SHOULD BE MADE TO THE LOADING PLANS FOR THE DESIGN LOADS. SHOULD THE CONTRACTOR PROPOSE TO USE THE PERMANENT STRUCTURE TO SUPPORT OR RESTRAIN CRANES, HOISTS OR OTHER PLANT, THE CONTRACTOR SHALL BE RESPONSIBLE FOR VALIDATING THE DESIGN IN THE TEMPORARY CONDITION.

24 THE STRUCTURE/BUILDING DOCUMENTED ON THESE DRAWINGS HAS BEEN DESIGNED FOR THE FOLLOWING PURPOSE/USES:

24a UNIVERSITY BUILDINGS

25 ANY MODIFICATIONS (INCLUDING PENETRATIONS, TRENCHING, CUT OUTS AND THE LIKE) TO THE STRUCTURAL MEMBERS SHALL BE APPROVED BY WSP PRIOR TO COMMENCEMENT OF SUCH WORK.

26 THE STRUCTURAL WORK ON THESE DRAWINGS HAS BEEN DESIGNED FOR THE FOLLOWING LOADS:

AREA	SDL		LIVE LOAD	
	kPa	kg/m2	kPa	kg/m2
SUSPENDED SLABS/SLAB ON GROUND	1	100	4	400
ROOF	0.5	50	0.25	25

27 REFER TO LOADING DIAGRAMS ON THE DRAWINGS FOR SPECIFIC LOCATIONS WIND LOAD CRITERIA:

DIRECTION	TERRAIN CATEGORY	ULTIMATE REGIONAL WIND SPEED m/s	SERVICEABILITY REGIONAL WIND SPEED m/s
NORTH	TC2.5	61.5	43

28a EARTHQUAKE CRITERIA:
28b IMPORTANCE LEVEL=2
28c PROBABILITY FACTOR (kp)=1.0
28d HAZARD FACTOR (Z)=0.08
28e SITE SUB-SOIL CLASS =Ce
28f EARTHQUAKE DESIGN CATEGORY (EDC)=II

BULK EXCAVATION NOTES

1 THE CONTRACTOR IS TO NOTIFY ALL SERVICE AUTHORITIES AND ARRANGE FOR DISCONTINUANCE OF SERVICES OR SUPPLY AS APPLICABLE AND DO ALL CUTTING, DISCONNECTION OR SEALING OFF OF SERVICES AND DRAINS AS REQUIRED WITHIN THE AREA TO BE EXCAVATED PRIOR TO EXCAVATION. SERVICES OR SUPPLY LINES THAT ARE TO BE RETAINED SHALL REMAIN UNDAMAGED AND GIVEN ALL NECESSARY PROTECTION.

2 SERVICES SHOWN ON THESE DRAWINGS HAVE BEEN OBTAINED FROM THE RELEVANT AUTHORITIES, BUT IT IS THE CONTRACTOR'S RESPONSIBILITY TO CONFIRM ALL EXISTING SERVICES AND THEIR LOCATIONS AND TO ENSURE THAT ANY SERVICE THAT IS TO REMAIN IS NOT DAMAGED OR AFFECTED BY THE WORKS.

3 THE BULK EXCAVATION SHALL BE CARRIED OUT IN ACCORDANCE WITH THE BULK EXCAVATION PROFILE. EXCESS EXCAVATIONS SHALL NOT BE CAUSE FOR A VARIATION. EXCESS EXCAVATION SHALL BE FILLED BY THE CONTRACTOR WITH 6% CEMENT STABILIZED SAND UNLESS OTHERWISE APPROVED BY THE SUPERINTENDENT.

4 THE CONTRACTOR SHALL PROVIDE AND DO ALL BRACING OR SHORING NECESSARY TO RETAIN EARTH BANKS, ROADS, PAVEMENTS, WALLS AND FOOTINGS OF ADJOINING PROPERTIES AND PREVENT CAVING AND DISPLACEMENT OF ADJACENT SOIL OR STRUCTURES AND PROVIDE ALL NECESSARY COMPONENTS OF SUCH BRACING.

5 ALL EXCAVATED MATERIAL SHALL BE REMOVED FROM THE SITE AND SHALL NOT BE USED FOR LEVELLING UNEVEN AREAS, FILLING EXCESS EXCAVATIONS OR BACKFILLING BEHIND RETAINING WALLS UNLESS WRITTEN APPROVAL HAS BEEN OBTAINED FROM THE SUPERINTENDENT.

6 TOPSOIL TO BE STOCKPILED FOR FUTURE LANDSCAPING USE IF DIRECTED BY THE SUPERINTENDENT.

7 ANY CONTAMINATED MATERIAL SHALL BE IDENTIFIED AND REMOVED FROM SITE IN ACCORDANCE WITH THE RELEVANT AUTHORITY REQUIREMENTS.

8 THE CONTRACTOR SHALL PROVIDE PUMPS, TEMPORARY SUMPS AND DRAINS AND DO ALL BAILING ETC AS MAY BE NECESSARY TO ENSURE THAT NO WATER IS PERMITTED TO REMAIN IN THE EXCAVATION AT ANY TIME.

9 THE TOP EDGE OF BATTERS AND ACCESS RAMPS SHALL BE PROTECTED BY CATCH DRAIN OR OTHER METHODS TO PREVENT SURFACE RUN-OFF ENTERING THE EXCAVATION.

10 WHERE BLASTING IS PERMITTED BY THE SUPERINTENDENT TO REMOVE ANY ROCK OR OBSTRUCTION IT SHALL BE DONE BY EXPERIENCED PERSONNEL IN STRICT ACCORDANCE WITH THE RELEVANT AUTHORITIES REQUIREMENTS. SHOULD BLASTING BE PERMITTED IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO TAKE ALL PRECAUTIONS NECESSARY FOR THE PROTECTION OF ADJACENT BUILDINGS AND TO CONFORM TO ALL RELEVANT AUTHORITIES REQUIREMENTS HAVING JURISDICTION OVER THE WORK.

11 BULK EXCAVATION TEMPORARY BATTERS AROUND THE PERIMETER OF THE SITE ARE TO BE AS SHOWN BELOW UNLESS NOTED OTHERWISE ON THE DRAWINGS.

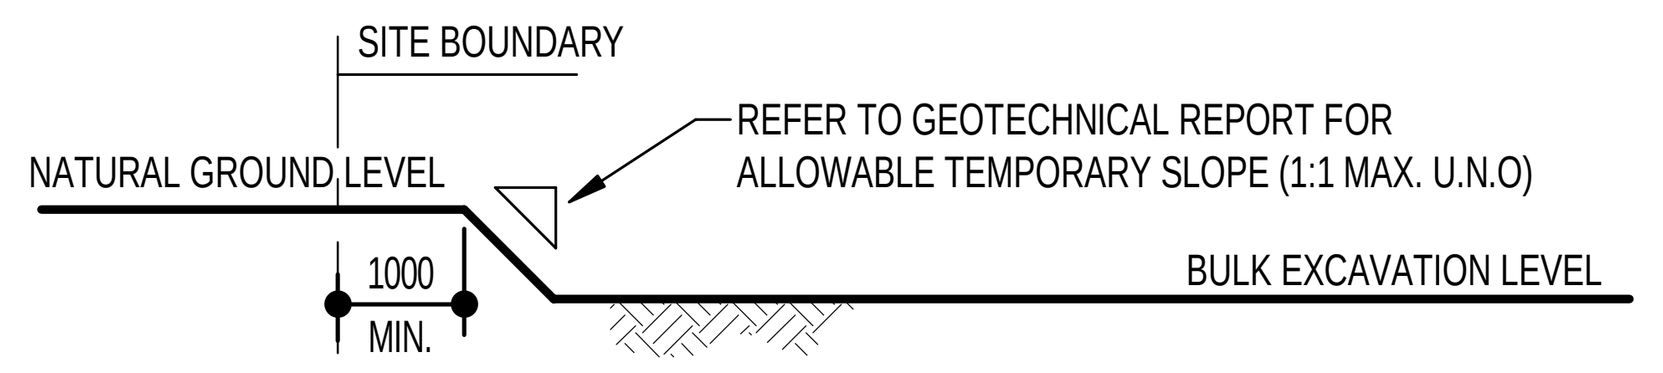

DEMOLITION NOTES

1 THESE DRAWINGS ARE TO BE READ IN CONJUNCTION WITH ALL OTHER CONSULTANT'S DRAWINGS, ARCHITECTURAL DRAWINGS, STRUCTURAL DRAWINGS AND SPECIFICATIONS. ALL WORKS SHALL COMPLY WITH AUSTRALIAN STANDARD AS 2601

2 INDICATIVE CONFIGURATIONS OF EXISTING STRUCTURAL ELEMENTS REPRESENTED ON THESE DRAWINGS ARE BASED ON INFORMATION PRESENTED ON THE EXISTING CONDITIONS FLOORS / REFLECTED CEILINGS PLANS PREPARED BY THE ARCHITECT BASED ON SURVEY DRAWINGS. THE CONTRACTOR IS RESPONSIBLE FOR VERIFICATION OF EXISTING STRUCTURAL CONDITIONS PRIOR TO COMMENCEMENT OF DEMOLITION OF EXISTING STRUCTURE. WHERE CONFLICT OCCURS BETWEEN DRAWINGS AND ACTUAL CONDITIONS ENCOUNTERED ON SITE, THE CONTRACTOR SHALL CONTACT THE SUPERINTENDENT FOR ADVICE IN WRITING PRIOR TO PROCEEDING WITH DEMOLITION WORKS.

3 THE EXTENT OF THE DEMOLITION OF EXISTING STRUCTURE (REPRESENTED ON THESE DRAWINGS) IS INDICATIVE ONLY. REFER TO THE ARCHITECTURAL DRAWINGS FOR ALL DIMENSIONAL/SETOUT INFORMATION.

4 DEVELOPMENT OF DETAILED PROCEDURES AND WORK METHODS FOR THE DEMOLITION OF ELEMENTS OF THE EXISTING BUILDING IS THE RESPONSIBILITY OF THE DEMOLITION CONTRACTOR. THE DEMOLITION CONTRACTOR SHALL UNDERTAKE THE NECESSARY STRUCTURAL DESIGN ANALYSIS REQUIRED TO ASSESS AND VERIFY THE STRUCTURAL ADEQUACY OF THE PROPOSED DEMOLITION PROCEDURES AND SHALL PROVIDE ADDITIONAL TEMPORARY BRACING/PROPPING AS REQUIRED TO PERMIT SAFE DEMOLITION AND MAINTAIN THE STRUCTURAL INTEGRITY OF THE EXISTING BUILDING AT ALL TIMES.

5 IF TEMPORARY SUPPORT IS REQUIRED, CERTIFICATION FOR ITS DESIGN AND INSTALLATION IS REQUIRED FROM A PROFESSIONAL ENGINEER ENGAGED BY THE CONTRACTOR.

6 IT IS THE CONTRACTOR'S RESPONSIBILITY TO SELECT APPROPRIATE DEMOLITION SEQUENCES, PROCEDURES AND METHODS TO ENSURE THAT DEMOLITION WORKS DO NOT DISTURB RETAINED SECTIONS OF ADJACENT EXISTING STRUCTURE.

7 NO "OVER-CUTTING" WITH LARGE DIAMETER SAW BLADES IS TO OCCUR AT CORNERS OF SECTIONS OF FLOOR SLABS THAT ARE TO REMAIN IN THE PERMANENT WORKS. PROVIDE CORE HOLES AT CORNERS AND SQUARE OFF CORNERS WITH A SMALL DIAMETER SAW BLADE TO AVOID "OVER-CUTTING".

8 ALL DEMOLITION WORKS ARE TO BE CARRIED OUT USING "LOW IMPACT" DEMOLITION TECHNIQUES (e.g. FLAME CUTTING OF STEEL BEAMS, DEMOLITION OF REINFORCED CONCRETE STRUCTURE WITH HAND HELD EQUIPMENT, ETC...) AS REQUIRED TO ENSURE THAT THE STRUCTURAL INTEGRITY OF THE RETAINED STRUCTURE IS NOT COMPROMISED.

9 THE DEMOLITION CONTRACTOR SHALL BE RESPONSIBLE FOR MAKING GOOD ALL WORKS THAT HAVE BEEN DAMAGED DURING AND AS A RESULT OF THE DEMOLITION WORKS. THIS INCLUDES:

9a REPAIR AND/OR REPLACE EXISTING ITEMS NOT NOTED TO BE DEMOLISHED OR REMOVED BUT WHICH HAVE BECOME DAMAGED

9b WHILE UNDERTAKING THE DOCUMENTED DEMOLITION WORKS. ALL SUCH REPAIRS, REPLACEMENTS AND MODIFICATIONS ARE TO RESTORE ANY DAMAGED ITEMS TO THEIR ORIGINAL CONDITION, PRIOR TO THE DAMAGE, TO THE SATISFACTION OF AND AT NO ADDITIONAL COST TO THE OWNER.

9c PATCH, FILL AND REPAIR ALL SURFACES DISTURBED, CUT, DAMAGED, IN NEED OF REPAIR OR MADE IMPERFECT BY THE DOCUMENTED DEMOLITION WORK AS REQUIRED TO PREPARE FOR NEW WORK AND ARRANGEMENTS.

TENDER NOTES

1 THESE DRAWINGS HAVE BEEN DEVELOPED TO APPROXIMATELY 60% DESIGN DEVELOPMENT AND ARE INTENDED FOR THE PURPOSE OF D+C TENDER. THEY ARE AN INDICATIVE EXTENT OF THE COMPLETE WORKS ONLY. THE DRAWINGS REQUIRE FURTHER DEVELOPMENT AND DETAILS TO ACHIEVE FINALISED DESIGN DEVELOPMENT LEVEL AND BE SUITABLE FOR CONSTRUCTION. THE TENDERING CONTRACTOR IS TO REVIEW THE DESIGN INTENT WITHIN AND MAKE SUITABLE ALLOWANCE FOR THE COMPLETION OF THE DESIGN AND SUITABLE ALLOWANCE TO COMPLETE THE ENTIRE SCOPE OF WORKS.

2 TO DETERMINE THE FULL EXTENT OF WORKS, THESE DRAWINGS SHALL BE READ IN CONJUNCTION WITH THE ARCHITECTURAL DRAWINGS, ENGINEERING SERVICES DRAWINGS, LANDSCAPE DRAWINGS, CIVIL DRAWINGS, 60% DESIGN DEVELOPMENT REPORT, PROJECT GEOTECHNICAL REPORTS, PROJECT SPECIFICATIONS AND OTHER CONTRACT DOCUMENTS. IT IS THE CONTRACTORS RESPONSIBILITY TO ALLOW FOR ALL COST ELEMENTS SHOWN ON THE ARCHITECTURAL AND OTHER CONSULTANT'S DRAWINGS AND SPECIFICATIONS TO COMPLETELY CONSTRUCT THE FULL SCOPE OF WORKS.

3 THE CONTRACTOR IS TO ALLOW TO COORDINATE THE REQUIREMENTS FOR ALL SERVICES, SETDOWN, HOBS, FALLS, PENETRATIONS, ETC REQUIRED TO COMPLETE THE WORKS AND COMPLETE THE CONSULTANTS DESIGN INTENT.

4 THE CONTRACTOR IS TO COMPLETELY READ THE CONTRACT DOCUMENTATION AND IS TO ALLOW TO INCORPORATE ALL OF THE REQUIRED ITEMS INTO THE FINAL DESIGN AND CONSTRUCTION WORKS.

5 THE CONTRACTOR IS TO ALLOW FOR THE COST OF CONSTRUCTION JOINTS, EXPANSION JOINTS, SLIP JOINTS, SAW CUTS, OR OTHERWISE NOT SHOWN ON PLAN AND REQUIRED TO COMPLETE THE WORKS.

6 THE CONTRACTOR IS TO ALLOW FOR THE COSTS OF ALL SECONDARY AND TERTIARY STEELWORK INCLUDING CONNECTIONS REQUIRED TO SUPPORT ALL ARCHITECTURAL SCREENS, CLADDING, CEILINGS, SUN SHADES, LOUVRES AND SHADE FINS, TYPICAL. FINAL DETAILS ARE TO BE DEVELOPED BY THE CONTRACTOR FOLLOWING TENDER AWARD.

7 THE CONTRACTOR IS TO ALLOW FOR THE COST OF ALL MISCELLANEOUS SECONDARY STEELWORK, GLAZING AND DOOR SUPPORTS, BRACES NON LOAD BEARING WALL RESTRAINT ELEMENTS, GUTTERING AND GUTTER SUPPORTS, FACADE AND DOOR FRAMING, GIRTS AND JOISTS, METALWORK OR OTHERWISE SHOWN ON THE ARCHITECTURAL AND OTHER CONSULTANTS DRAWINGS AND REQUIRED TO COMPLETE THE WORKS.

8 THE CONTRACTOR IS TO ALLOW FOR THE COST OF ALL CONNECTIONS RELATING TO STEELWORK, MISCELLANEOUS STEELWORK, METALWORK, GUTTERING, FACADE AND DOOR FRAMING, GIRTS AND JOISTS REQUIRED TO COMPLETE THE WORKS.

9 ALL EXPOSED OR EXTERIOR ENVIRONMENT STEELWORK IS TO BE GALVANISED U.N.O.

10 ALL EXPOSED OR EXTERIOR ENVIRONMENT REINFORCING STEEL OR DOWELLING IS TO BE GALVANISED U.N.O.

11 ROOF ACCESS POINTS LOCATIONS HAVE NOT BEEN FINALISED OR SHOWN ON THE DOCUMENTATION. THE CONTRACTOR IS TO MAKE ALLOWANCE FOR SECONDARY FRAMING REQUIRED TO SUPPORT ANY SAFE ROOF ACCESS POINTS AND RESTRAINTS, TO BE CONFIRMED BY THE ACCESS CONSULTANT/ARCHITECT. RESULTING STRUCTURAL DESIGN AMENDMENTS ARE TO BE CONFIRMED BY WSP AND ARE NOT GROUNDS FOR A VARIATION CLAIM.

12 THE CONTRACTOR IS TO ALLOW FOR ALL WATERPROOFING AS NOTED IN THE DRAWINGS AND SPECIFICATIONS TO THE ARCHITECTURAL DETAILS UNLESS NOTED OTHERWISE. NOTE: ALL STRUCTURES BELOW THE WATER TABLE ARE TO BE FULLY TANKED.

13 THE STRUCTURAL THICKNESSES NOTED ON THE STRUCTURAL DRAWINGS ARE NOT TO BE ALTERED WITHOUT THE PRIOR WRITTEN APPROVAL BY THE PROJECT SUPERINTENDENT AND WSP.

14 ALL WALLS NOT SHOWN ON THE STRUCTURAL DRAWINGS ARE ASSUMED TO BE LIGHTWEIGHT FRAMED AND NON-LOAD BEARING U.N.O. REFER TO THE ARCHITECTS DOCUMENTATION FOR DETAILS.

15 SHOULD ANY AMBIGUITY, ERROR OR OMISSIONS, DISCREPANCY, INCONSISTENCY OR OTHER FAULT EXIST, OR SEEM TO EXIST IN THESE DOCUMENTS, IMMEDIATELY NOTIFY WSP AND THE PROJECT SUPERINTENDENT.

16 ALL TEMPORARY WORKS REQUIRED TO COMPLETE THE FULL SCOPE OF WORKS IS TO BE ALLOWED FOR BY THE CONTRACTOR AT THE CONTRACTOR'S EXPENSE. THE DESIGN AND CERTIFICATION OF SUCH WORKS IS TO BE COMPLETED BY A SUITABLY QUALIFIED TEMPORARY WORKS ENGINEER AT THE CONTRACTORS EXPENSE.

17 THE GEOTECHNICAL INFORMATION ISSUED FOR D+C TENDER IS INCOMPLETE AND IN MOST CASES PRELIMINARY ONLY. THE CONTRACTOR IS TO ALLOW FOR THE ENGAGEMENT OF A GEOTECHNICAL ENGINEER TO CARRY OUT ADDITIONAL GEOTECHNICAL INVESTIGATIONS AS REQUIRED TO CONFIRM THE ASSUMPTIONS NOTED IN THE DESIGN. THE CONTRACTOR IS TO MAKE A REASONABLE ALLOWANCE TO DEVELOP THE DESIGN INTENT BASED ON THE SITE CONDITIONS INCLUDING ALLOWING FOR THE REMOVAL OF HIGHLY REACTIVE MATERIAL, PROCUREMENT AND PLACEMENT OF ENGINEERED FILL AND THE ENGAGEMENT OF A SUITABLY QUALIFIED GEOTECHNICAL ENGINEER TO FINALISE ENGINEERING FILL SPECIFICATIONS AND SUPERVISE PLACEMENT.

18 ALL SUBGRADE PREPARATION IS TO COMPLY WITH THE REQUIREMENTS OF THE GEOTECHNICAL REPORTS AND THE RECOMMENDATION OF THE PROJECT GEOTECHNICAL ENGINEER. REFER TO GENERAL NOTES DRAWING.

19 THE CONTRACTOR IS TO COMPLETELY READ AND MAKE THEIR OWN ASSESSMENT OF THE PROJECT GEOTECHNICAL REPORTS AND MAKE SUFFICIENT ALLOWANCES FOR BLINDING, EXCAVATION, BULK EARTHWORKS, EXCAVATION IN ROCK, SITE STRIPPING, REMOVAL OF SOFT SPOTS, REMOVAL OF HIGHLY REACTIVE CLAYS AS REQUIRED BY THE GEOTECHNICAL REPORTS, SUB GRADE PREPARATION, CONSTRUCTION OF ENGINEERED FILL PLATFORMS AND DISPOSAL OF SPOIL AS REQUIRED TO CONSTRUCT THE PROJECT.

20 THE CONTRACTOR IS TO MAKE THEIR OWN ASSESSMENT OF THE EXISTING MATERIAL ON SITE AND MAKE SUFFICIENT ALLOWANCE FOR ADDITIONAL GEOTECHNICAL TESTING TO DETERMINE THE SUITABILITY FOR USE AS ENGINEERED FILL MATERIAL TO THE SATISFACTION OF THE PROJECT GEOTECHNICAL ENGINEER AND THE PROJECT SUPERINTENDENT

21 THE CONTRACTOR IS TO MAKE SUITABLE ALLOWANCES TO IMPLEMENT ALL THE RECOMMENDATIONS WITHIN THE PROJECT GEOTECHNICAL REPORTS.

22 THE CONTRACTOR IS TO READ THE DOCUMENTED SLAB AND FOUNDATION PLANS IN CONJUNCTION WITH THE CIVIL ENGINEERING DOCUMENTATION AND THE ARCHITECTURAL DOCUMENTATION TO DETERMINE THE EXTENT OF REQUIRED CUT AND FILL. THE CONTRACTOR IS TO MAKE SUFFICIENT ALLOWANCES FOR THE CONSTRUCTION OF THE SUB GRADE AND BUILDINGS PADS INLINE WITH THE DOCUMENTED DESIGN INTENT.

23 THE CONTRACTOR IS TO MAKE SUFFICIENT ALLOWANCE IN THEIR PRICING FOR THE REGISTERED BUILDING SURVEYOR TO UNDERTAKE ALL MANDATORY INSPECTIONS AS REQUIRED UNDER THE BUILDING PERMITS AND THE BUILDING ACT FOR THE PROJECT. WHERE THE STRUCTURAL ENGINEER HAS CARRIED OUT AN INSPECTION IT IS NOT INTENDED TO REPLACE THE BUILDING SURVEYORS MANDATORY INSPECTIONS AND CANNOT BE ASSUMED TO DO SO.

24 THE CONTRACTOR IS TO MAKE SUFFICIENT ALLOWANCE FOR THE DESIGN AND CONSTRUCTION OF ALL SECONDARY STRUCTURES AS REQUIRED TO COMPLETE THE SCOPE OF WORKS INCLUDING LIGHT POLE FOOTINGS, FENCES AND GATE FOOTINGS, FENCES, ENTRY SIGNAGE, RETAINING WALLS, COVER WAYS, ETC WITH DETAILS TO BE DEVELOPED AND FINALISED FOLLOWING APPOINTMENT OF A CONTRACTOR.

25 STRUCTURES NOT SHOWN ON STRUCTURAL DRAWINGS BUT NEED TO BE ALLOWED FOR IN TENDER PRICING ARE AS FOLLOWS:

HORTICULTURE BUILDING

THE HORTICULTURE BUILDING IS SHOWN ON ARCHITECTURAL DRAWING & COMPRISES A PROPRIETARY STEEL SHED. THE CONTRACTOR IS TO MAKE A SUITABLE ALLOWANCE FOR THE FOLLOWING:

1. A STEEL SHED TO THE EXTENT SHOWN BY ARCHITECT
2. CONCRETE FOOTINGS & SLAB ON GROUND. FOOTING SIZES, NUMBER & LOCATION TO BE ADVISED BY STEEL SHED MANUFACTURER

ENGINEERING BUILDING

THE EXTENSION OF THE ENGINEERING BUILDING SHOWN IN ARCHITECTS PLANS IS A PROPRIETARY STEEL SHED, THE CONTRACTOR IS TO MAKE A SUITABLE ALLOWANCE FOR THE FOLLOWING:

1. A STEEL SHED TO THE EXTENT SHOWN BY ARCHITECT
2. CONCRETE FOOTINGS & SLAB ON GROUND. FOOTING SIZES, NUMBER & LOCATION TO BE ADVISED BY STEEL SHED MANUFACTURER

ADDITIONALLY ALLOWANCE SHOULD BE MADE FOR RELOCATING EXISTING GANTRY CRANE & CRANE RAIL BEAM FROM EXISTING BUILDING 24 INTO BUILDING 21a. WE UNDERSTAND FROM PHOTOS THAT THE EXISTING CRANE RAIL BEAMS HANG FROM THE RAFTERS HENCE THE EXISTING RAFTERS IN BUILDING 21a WILL NEED TO BE CHECKED TO SUPPORT THE LOADS FROM THE RELOCATED CRANE. EXISTING DRAWINGS SHOWING SIZING OF THE SUPERSTRUCTURE FRAMING TO BUILDNG 21a WAS NOT AVAILABLE AND WILL NEED TO BE CONFIRMED BY THE D&C CONTRACTOR.

BORED PIER NOTES

1 THE WORK TO BE CARRIED OUT BY THE CONTRACTOR COMPRISES THE DESIGN AND CONSTRUCTION OF THE BORED PIER SHOWN ON THE DRAWINGS.

2 REFER TO FOOTING NOTES ON THE DRAWINGS FOR DETAILS OF THE GEOTECHNICAL REPORT.

3 THE BORED PIERS MAY BE REDESIGNED BY THE CONTRACTOR, AT THEIR EXPENSE TO THE REQUIREMENTS OF AS 2159, IN WHICH CASE THE DESIGN AND CERTIFICATION OF THE BORED PIERS IS TO BE THE RESPONSIBILITY OF THE CONTRACTOR. THE DESIGN OF THE BORED PIERS IS TO BE BASED ON THE REQUIRED SAFE WORKING LOADS AS NOTED ON THE DRAWINGS AND THE RECOMMENDATIONS OF THE GEOTECHNICAL REPORT. ALTERNATIVE DESIGN COMPUTATIONS AND DRAWINGS ARE TO BE SUBMITTED TO THE SUPERINTENDENT, THE CERTIFYING ENGINEER AND THE BUILDING SURVEYOR IN ORDER TO OBTAIN A BUILDING PERMIT FOR THE BORED PIERS. THE REDESIGNED BORED PIERS SHALL ACHIEVE CALCULATED SETTLEMENTS UNDER THE SCHEDULED LOADS NO GREATER THAN THOSE CALCULATED FOR THE DESIGN AS SHOWN ON THESE DRAWINGS (TOTAL SETTLEMENT FOR EACH PIER AND DIFFERENTIAL SETTLEMENT BETWEEN PIERS/PIERCAPS). THE CONTRACTOR SHALL INCLUDE CALCULATIONS OF THE PREDICTED LONG-TERM SETTLEMENTS IN THEIR COMPUTATIONS FOR REVIEW. AS A GUIDE, THE FOLLOWING SETTLEMENT LIMITS SHOULD BE OBSERVED:

3a - TOTAL LONG TERM SETTLEMENT OF NO GREATER THAN 10mm FOR EACH PIER.

3b - DIFFERENTIAL LONG-TERM SETTLEMENT BETWEEN ADJACENT PIERS/PIERCAPS OF 5mm OR DISTANCE/1000, WHICHEVER IS LESS.

4 ADJACENT BUILDINGS AND SERVICES; THE CONTRACTOR IS RESPONSIBLE FOR ENSURING THAT ANY VIBRATIONS AND/OR HORIZONTAL OR VERTICAL GROUND DISPLACEMENTS ARE CONTROLLED AND DO NOT IMPACT ON ADJOINING BUILDINGS OR SERVICES. THE CONTRACTOR SHALL ALLOW FOR THE COST AND UNDERTAKE ANY MONITORING REQUIRED FOR ADJACENT BUILDINGS OR SERVICES.

5 THE CONTRACTOR IS RESPONSIBLE FOR PROPERLY SETTING OUT THE PIER LOCATIONS. FOUNDING LEVELS OF THE BORED PIER BASES ARE TO BE DETERMINED ON SITE AND APPROVED BY THE GEOTECHNICAL ENGINEER. ANY MINIMUM TOP OF PIER OR MAXIMUM BASE OF PIER LEVELS INDICATED ON THE DRAWINGS SHALL BE COMPLIED WITH BY THE CONTRACTOR. TOPS OF THE BORED PIERS ARE TO BE SUCH THAT THEY ARE WITHIN 0mm AND -50mm OF THE LEVELS INDICATED ON THE DRAWINGS.

5a INDICATED ON THE DRAWINGS, THE VERTICAL CENTERLINE OF THE BORED PIERS ARE TO BE WITHIN +50mm OF THE POSITION OF THE CENTERLINE OF EACH BORED PIER AS SHOWN ON THE DRAWINGS. EVERY SHAFT SHALL BE BORED TO WITHIN A TOLERANCE IN RESPECT OF DEPARTURE FROM TRUE VERTICALLY OF 4% OR 75mm WHICHEVER IS THE LESSER.

6 THE INSTALLED PIERS SHALL CARRY THE DESIGN LOADS NOTED ON THE DRAWINGS WITHIN THE TIGHTER OF THE TOLERANCE REQUIREMENTS SPECIFIED IN AS 2159 OR ON THE DRAWINGS/SPECIFICATIONS. THE CONTRACTOR SHALL BE RESPONSIBLE FOR VERIFICATION THAT THE INSTALLED PIERS ACHIEVE THE SPECIFIED PERFORMANCE REQUIREMENTS TO THE SATISFACTION OF THE SUPERINTENDENT.

7 THE ROCK SOCKET IS THE LENGTH OF SHAFT AT THE LOWER END OF THE BORED PIER WHICH IS ENTIRELY IN _ _ _ _ _ _ (_ _) ROCK (OR BETTER) AND IS THE PORTION OF THE SHAFT THROUGH WHICH THE LOAD IN THE PIER IS TRANSFERRED BY SIDE FRICTION TO THE FOUNDATION MATERIAL. THE VERTICAL SURFACE OF THE ROCK SOCKET MUST BE LEFT IN A ROUGH CONDITION BY SPIRAL GROOVING AFTER EXCAVATION, FREE FROM LOOSE MATERIAL AND/OR CLAY SMEAR.

7a THE CONTRACTOR IS TO MAKE ALLOWANCE FOR VARYING ROCK CONDITIONS ALONG THE LENGTH OF THE ROCK SOCKET IN THE TENDER. THE LENGTH OF THE ROCK SOCKET IS TO BE ADJUSTED BY THE PILING CONTRACTOR ACCORDINGLY TO SUIT THE ROCK CONDITIONS ENCOUNTERED DURING BORING OPERATIONS.

8 TEMPORARY LINING OF SHAFTS AS NECESSARY SHALL BE PROVIDED BY THE CONTRACTOR TO PREVENT COLLAPSE DUE TO THE PRESENCE OF UNSTABLE MATERIAL, GROUND WATER OR OTHER UNFORESEEN CIRCUMSTANCES. THE CONTRACTOR SHALL PROVIDE ALL EQUIPMENT NECESSARY FOR PLACEMENT AND REMOVAL OF TEMPORARY LINERS. PERMANENT LINING IS TO BE AS DETAILED ON THE DRAWINGS. ALTERNATIVELY, THE PERMANENT LINING ON THE BORED PIERS MAY BE REDESIGNED AND DETAILED BY THE CONTRACTOR SUCH THAT THE LINING SHALL VERTICALLY ISOLATE THE BORED PIER FROM THE SURROUNDING GROUND WHILE PROVIDING THE REQUIRED HORIZONTAL SUPPORT.

9 AFTER EXCAVATIONS HAVE BEEN COMPLETED THE BASES SHALL BE CLEANED OUT AND RECEIVE APPROVAL FROM THE GEOTECHNICAL ENGINEER BEFORE REINFORCEMENT CAGES ARE SET IN POSITION AND CONCRETE PLACED. CLEARING OUT THE BASE OF ANY SHAFT MEANS ALL LOOSE AND SOFTENED MATERIAL SHALL BE REMOVED. THE HOLE SHALL BE DE-WATERED IF REQUIRED BY THE GEOTECHNICAL ENGINEER. THE CONTRACTOR SHALL ALLOW FOR THE COST OF GEOTECHNICAL INSPECTIONS AND FOR ANY DE-WATERING REQUIRED.

10 WATER SHALL BE DIVERTED TO A PROPERLY SITED SUMP AND THE PILING CONTRACTOR SHALL SUPPLY AND INSTALL A PUMP OF ADEQUATE CAPACITY AND HAVE ON SITE A STANDBY UNIT OF SIMILAR CAPACITY. THE TOP OF THE HOLE SHALL BE PROPERLY COVERED TO PREVENT SURFACE WATER OR RAINFALL FROM ENTERING THE HOLE.

11 ALL STEEL REINFORCEMENT SHALL COMPLY WITH THE REQUIREMENTS OF AS4671 AND AS 3600.

11a LOOSE MILL SCALE, RUST OIL, PAINT, GREASE AND OTHER MATTER SHALL BE REMOVED BEFORE PLACING THE REINFORCEMENT IN POSITION AND THE REINFORCEMENT SHALL BE KEPT FREE OF SUCH MATTER UNTIL THE CONCRETE IS PLACED.

11b REINFORCEMENT SHALL BE PROPERLY FABRICATED INTO CAGES, SHALL BE INSTALLED IMMEDIATELY AFTER THE BASE OF ANY SHAFT HAS BEEN APPROVED AND SHALL BE SECURELY FIXED SO THAT NO VERTICAL MOVEMENT OCCURS WHILST CONCRETE IS BEING PLACED. APPROVED SPACERS SHALL BE PROVIDED AT 2 METRE MAXIMUM CENTRES ALONG THE LENGTH OF THE CAGE TO MAINTAIN ADEQUATE COVER.

12 CONCRETE IN BASES AND SHAFTS SHALL BE PLACED CONTINUOUSLY UP TO THE UNDERSIDE OF PIER CAPS. CONCRETE SHALL NOT BE DROPPED BUT SHALL BE PLACED USING A CONCRETE PUMP OR A PROPERLY CONSTRUCTED CHUTE

12a WHERE PERMITTED BY THE SUPERINTENDENT, CONCRETE SHALL BE PLACED UNDERWATER USING A TREMIE. POURING SHALL PROCEED WITH THE TREMIE DISCHARGE AT ALL TIMES BELOW THE TOP SURFACE OF THE POURED CONCRETE. THE CONCRETE LEVEL SHALL BE BROUGHT UP CONTINUOUSLY UNTIL THE TOP LAYER OF CONCRETE THAT HAS BEEN IN CONTACT WITH THE FREE WATER CAN BE SATISFACTORILY REMOVED AND CONCRETING CAN PROCEED ABOVE WATER IN THE USUAL MANNER.

13 PROPER SAFETY PRECAUTIONS SHALL BE TAKEN TO AVOID INJURY TO PEOPLE. UNATTENDED HOLES SHALL BE COVERED OR FENCED OFF AT ALL TIMES.

14 THE CONTRACTOR SHALL ALLOW FOR THE COST AND ARRANGE FOR THE INTEGRITY TESTING OF ALL BORED PIERS.

EARTHWORKS NOTES

1 ALL MATERIALS, WORKMANSHIP, HANDLING AND PLACEMENT SHALL BE IN ACCORDANCE WITH THE RELEVANT AUSTRALIAN STANDARDS, EXCEPT WHERE VARIED BY THE CONTRACT DOCUMENTS.

2 THE CONTRACTOR SHALL MAKE PROVISION FOR THE EFFECTIVE DIVERSION OR REMOVAL OF ALL SURFACE WATER FROM THE PREPARED SUBGRADE, FROM ANY SOURCE. TEMPORARY DRAINS, EFFECTIVE PUMPING EQUIPMENT OR OTHER MEANS TO DE-WATER THE EARTHWORKS SHALL BE PROVIDED BY THE CONTRACTOR.

3 THE CONTRACTOR SHALL PROVIDE ALL REQUIRED ENVIRONMENTAL TREATMENT OF RUNOFF FROM THE CONSTRUCTION SITE.

4 PROOF ROLL THE EXPOSED SUBGRADE WITH A STATIC SMOOTH STEEL WHEELED ROLLER WITH A MINIMUM MASS OF 12 TONNES, TO REVEAL SOFT, WET, LOOSE OR UNSTABLE AREAS. ALL SUCH AREAS THAT DO NOT IMPROVE WITH ROLLING SHALL BE EXCAVATED AND REPLACED WITH APPROVED MATERIAL COMPACTED TO 98% OF STANDARD MAX DRY DENSITY. RAISE THE SUBGRADE LEVEL FOR THE BUILDING FOOTPRINT TO THE DESIGN LEVEL, AS REQUIRED, USING APPROVED FILL MATERIAL PLACED IN LAYERS NOT EXCEEDING 150mm AND COMPACTED TO 98% STANDARD MAX DRY DENSITY, BEFORE PLACING THE NEXT LAYER.

5 EXCAVATED MATERIAL WON FROM THE SITE SHALL NOT BE USED AS ENGINEERING FILL WITHOUT THE WRITTEN APPROVAL OF THE SUPERINTENDENT.

6 SUBGRADE PREPARATION, FILL PLACEMENT AND COMPACTION SHALL BE SUPERVISED BY A GEOTECHNICAL ENGINEER. THE FREQUENCY OF FIELD TESTING SHALL BE IN ACCORDANCE WITH TYPE 1 EARTHWORKS AS SPECIFIED IN TABLE 8.1 OF AS3798.

FOOTING NOTES

1 THE MINIMUM SAFE BEARING CAPACITY OF THE FOUNDATION MATERIAL IS TO BE:
1a 250 kPa FOR PAD FOOTINGS
1b 200 kPa FOR STRIP FOOTINGS
1c 100kPa FOR RAFT SLABS (BEAMS)
1d 100kPa FOR RAFT SLABS (SLAB) & SLABS ON GROUND
1g REFER TO GEOTECHNICAL REPORT No 1-29688 BR 1.1 BY SOIL SURVEYS ENGINEERING

2 THE CONTRACTOR IS TO ALLOW FOR THE ENGAGEMENT OF A GEOTECHNICAL ENGINEER TO VERIFY THE FOUNDING MATERIAL PRIOR TO PLACEMENT OF REINFORCEMENT OR CONCRETE.

3 THE CONTRACTOR IS TO IMPLEMENT ALL THE RECOMMENDATIONS CONTAINED IN THE GEOTECHNICAL REPORT.

4 SITE CLASSIFICATION IN ACCORDANCE WITH AS 2870 IS CLASS H1.

5 OVER-EXCAVATION WITHIN THE INFLUENCE ZONE (45 DEGREE LINE DOWN FROM BASE OF FOOTING AND/OR WALL) OF ANY FOOTING AND/OR RETAINING WALL IS NOT ALLOWED WITHOUT THE PRIOR APPROVAL OF THE EXCAVATION SEQUENCE BY THE SUPERINTENDENT.

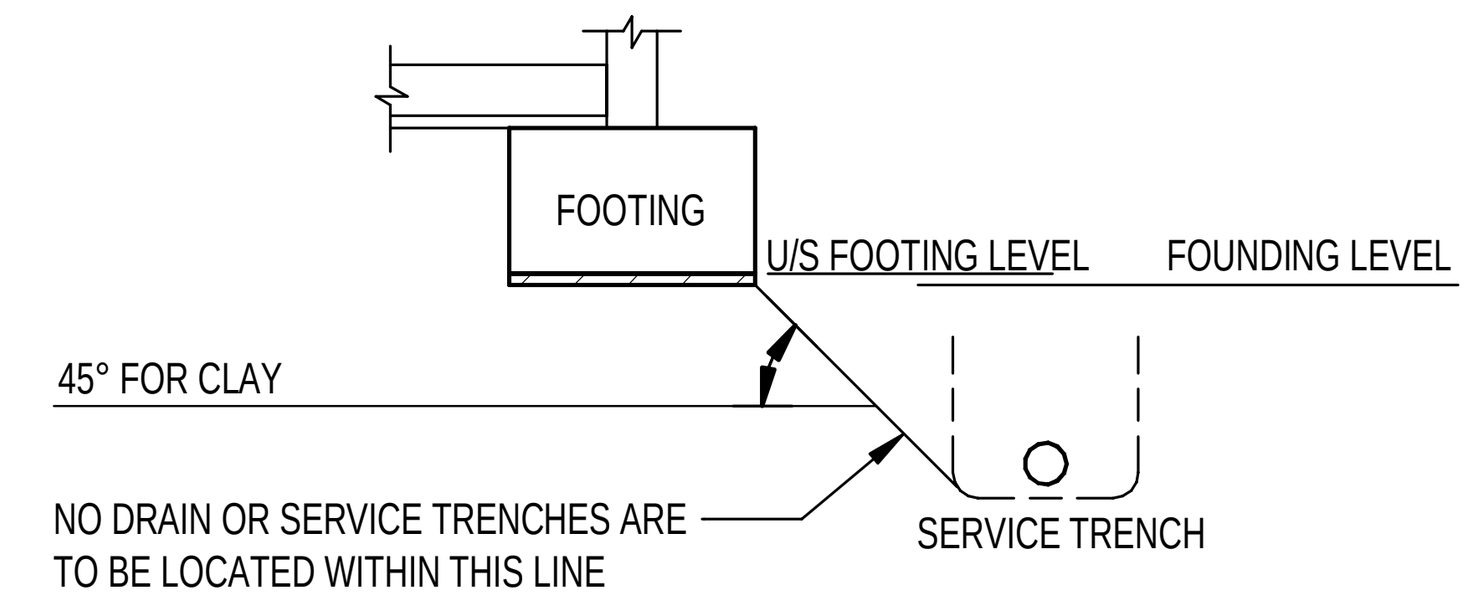

6 UNLESS NOTED OTHERWISE, WHEREVER A NEW FOOTING IS LOCATED CLOSE TO AN EXCAVATION, BATTER, EXISTING FOOTING, EXISTING SERVICE LINE OR PROPOSED SERVICE LINE, WHICH IS DEEPER THAN THE NEW FOOTING, THE EXCAVATION FOR THE NEW FOOTING IS TO BE DEEPENED AND BACKFILLED WITH BLINDING CONCRETE AS INDICATED BELOW.

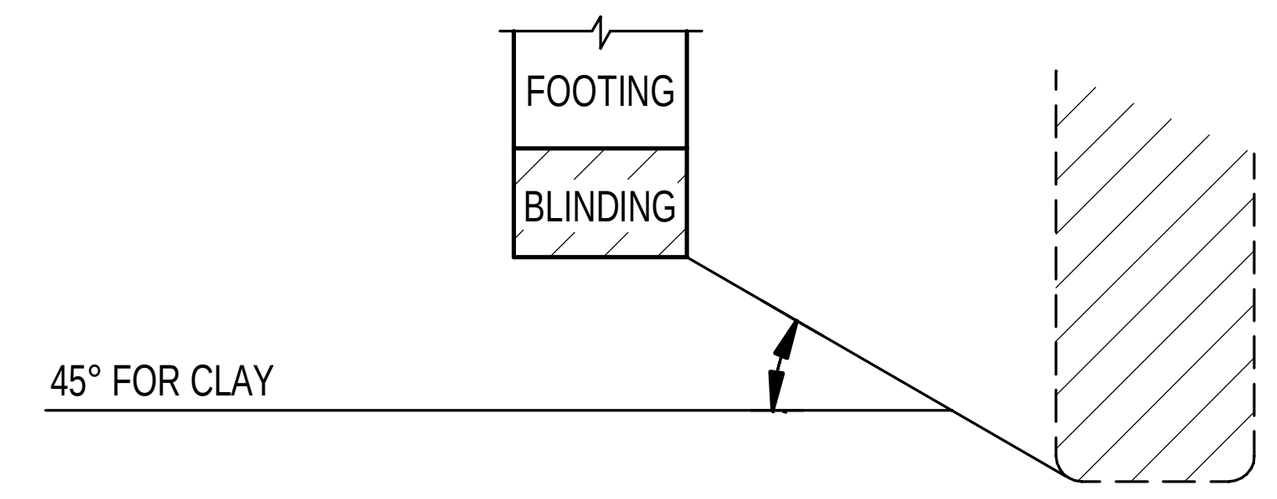

7 THE ASSUMED FOUNDING LEVELS OF THE FOOTINGS ARE TO BE AS INDICATED ON THE DRAWINGS. BEFORE ANY REINFORCEMENT OR CONCRETE IS PLACED, THE SAFE BEARING CAPACITY OF THE GROUND IS TO BE VERIFIED BY A GEOTECHNICAL ENGINEER. EXCAVATION SHALL CONTINUE UNTIL THE REQUIRED BEARING CAPACITY IS FOUND. OVER-EXCAVATION SHALL BE BACK-FILLED WITH 15 MPa BLINDING CONCRETE TO THE REQUIRED FOUNDING LEVEL.

SUB-GRADE PREPARATION NOTES

1 IT IS RECOMMENDED THAT SLAB BASE PREPARATION IS CARRIED OUT DURING THE DRIER MONTHS WHERE POSSIBLE.

2 THE SITE SHALL BE CLEARED OF ALL RUBBISH, FENCES, BUILDINGS, TREES, NON-ENGINEERED FILLING AND DELETERIOUS MATERIALS. TOP SOIL SHALL BE STRIPPED AND STOCKPILED AND THE GROUND EXCAVATED TO THE REQUIRED LEVELS. THE EXPOSED SURFACE SHALL BE PROOFED ROLLED WITH A 12T STATIC WEIGHT ROLLER WITH A MINIMUM OF 5 PASSES. ANY SOFT, WET OR LOOSE MATERIAL THAT DOES NOT RESPOND TO COMPACTION SHALL BE EXCAVATED TO EXPOSE A FIRM WORKING BASE AND REPLACED WITH SELECT FILLING AS SPECIFIED BELOW.

3 THE MOISTURE CONTENT OF THE SUB GRADE IS CRITICAL. DEPENDING ON THE MOISTURE CONTENT OF THE SUB GRADE AT THE TIME OF CONSTRUCTION, IT MAY BE NECESSARY TO ADD WATER OR ALLOW THE SUB GRADE TO DRY TO ACHIEVE SATISFACTORY COMPACTION. ALTERNATIVELY IF THE SUB GRADE IS WET OF OPTIMUM, HYDRATED LIME MAY BE USED TO STABILISE THE SUB GRADE ON APPROVAL OF THE PROJECT GEOTECHNICAL ENGINEER. THE MOISTURE CONTENT OF THE SUB GRADE SHOULD BE ADJUSTED TO WITHIN 85-115% OF THE STANDARD OPTIMUM MOISTURE CONTENT.

4 CLEAN COMPACTABLE NATURAL FILLING IS TO BE IMPORTED AND COMPACTED IN LAYERS NOT EXCEEDING 200mm LOOSE THICKNESS, USING AN APPROPRIATE VIBRATING ROLLER AND COMPACTED TO A DRY DENSITY OF NOT LESS THAN 98% OF THE MAXIMUM DRY DENSITY VALUE DETERMINED BY THE STANDARD COMPACTION TEST IN ACCORDANCE WITH AS1289 5.1 AND WITHIN ± 2% OF OPTIMUM. CARE SHALL BE TAKEN NOT TO OVER COMPACT OR PLACE FILLING TOO DRY OF OPTIMUM TO MINIMIZE THE EFFECTS OF POST CONSTRUCTION SWELLING.

5 IMPORTED FILLING USED SHALL BE CLEAN AND ESSENTIALLY OF GRANULAR NATURE, NON-ORGANIC AND HAVE A PLASTICITY INDEX OF LESS THAN 12%. IT SHALL HAVE A NOMINAL PARTICLE SIZE OF 50mm OR LESS.

6 ALL FILLING MUST BE PLACED AND CONTROLLED BY AN ACCREDITED GEOTECHNICAL AUTHORITY TO LEVEL 1 REQUIREMENTS, AS SET OUT IN AS3798-2007. TEST RESULTS AND CERTIFICATION SHALL BE SUPPLIED TO THE SUPERINTENDENT/ARCHITECT AT THE CONTRACTOR'S EXPENSE.

7 A MINIMUM COMPACTED LIFT OF 150mm IMPORTED FILLING SHOULD BE PLACED IMMEDIATELY ONCE SUB GRADE PREPARATION IS COMPLETED TO PROTECT THE SUB GRADE FROM MOISTURE CHANGES AND TO PROVIDE A WORKING PLATFORM FOR CONSTRUCTION PLANT/VEHICLES.

8 ALL PIPE AND TRENCH EXCAVATIONS SHALL BE CARRIED OUT CAREFULLY AND SHALL BE OF A MINIMUM SIZE. EXCAVATIONS SHALL BE BACKFILLED WITH APPROVED GRANULAR MATERIAL AND SHALL BE PLACED IN LAYERS NOT EXCEEDING 150mm LOOSE DEPTH AND COMPACTED BY VIBRATING PLATE TO A MINIMUM DRY DENSITY OF 100% OF THE AUSTRALIAN STANDARD MODIFIED COMPACTION TEST.

9 THE CONTRACTOR SHALL ALLOW FOR 2 No. FIELD DRY DENSITY TESTS TO BE CARRIED OUT AT MID-HEIGHT OF BACKFILL IN PIPE TRENCHES EXCEEDING 1 METRE IN DEPTH AND 2 No. AT FINAL SURFACE LEVEL OF THAT BACKFILL. FIELD DRY DENSITY TESTS TO BE CARRIED OUT IN ACCORDANCE WITH AUSTRALIAN STANDARD A.S. 1269 - TEST E.3.2.

10 EXCAVATE FOR BEAMS AND FOOTINGS TO THE DIMENSIONS SHOWN ON THE DRAWINGS, ENSURING THAT THE BASE AND SIDES OF THE EXCAVATIONS REMAIN FULLY COMPACTED AT ALL TIMES.

11 IMMEDIATELY BELOW THE SLAB, PLACE 50mm MINIMUM COMPACTED SAND BEDDING.

12 LAY A DAMP-PROOF MEMBRANE TO THE ENTIRE SLAB AREA AND ASSOCIATED BEAMS (0.2mm THICK 'FORTECON' OR SIMILAR APPROVED EQUIVALENT, OR AS SPECIFIED ON ARCHITECTURAL DRAWINGS). THE MEMBRANE SHALL BE LAPPED 300mm MINIMUM AT JOINTS AND TAPED CONTINUOUSLY WITH MOISTUREPROOF PRESSURE SENSITIVE TAPE. WRAP AND TAPE ALL PIPE PENETRATIONS. ANY HOLES ARE TO BE PATCHED AND TAPED.

LIGHTNING PROTECTION NOTES

1 REFER TO THE ELECTRICAL DRAWINGS AND/OR SPECIFICATION AND THE ARCHITECTURAL DRAWINGS FOR THE LOCATION AND DETAILS OF LIGHTNING PROTECTION AND THE ELECTRICAL PATH TO GROUND.

2 ALL METAL WORK SHALL BE MADE ELECTRICALLY CONTINUOUS. THIS SHALL BE ACHIEVED BY BOLTING, WELDING OR THE USE OF COPPER CABLES AS DIRECTED BY THE SUPERINTENDENT. ALL WELDS SHALL BE TACK WELDS AND SHALL BE IN ACCORDANCE WITH AS 1554.

3 ALL LAPS/SPLICES IN THE MAIN REINFORCEMENT, EITHER BARS OR MESH SHALL BE WELDED TO ENSURE CONTINUITY, WELDED BONDING SHALL BE PROVIDED AT NOT LESS THAN FOUR POINTS FOR LAPPING MESH SHEETS (ALONG EACH LAPPING EDGE) AND AT NOT LESS THAN TWO POINTS FOR LAPPING REINFORCEMENT BARS. SECONDARY REINFORCEMENT AT RIGHT ANGLES TO THE MAIN REINFORCEMENT SHALL BE WELDED TO THE MAIN REINFORCEMENT AT A MAXIMUM OF TWO METER CENTRES, OR AT LEAST A MINIMUM OF TWO LOCATIONS IN ANY ONE CLEAR LENGTH OF BAR. MULTIPLE LEVELS OF SLAB REINFORCEMENT SHALL BE BONDED VIA THE COLUMN BASE HOLDING DOWN BOLT CAGES.

4 COLUMN BASES SUPPORTED DIRECTLY ON THE GROUND SLAB SHALL BE BONDED TO THE MAIN SLAB REINFORCEMENT BY WELDING THE HOLDING DOWN BOLT CAGE DIRECTLY TO THE REINFORCEMENT. IN AREAS WITH MULTIPLE LEVEL SLAB REINFORCEMENT, EACH BOLT CAGE SHALL BE WELDED TO ALL LEVELS OF SLAB REINFORCEMENT. ALL COLUMN BASE PLATES SHALL BE DIRECTLY WELDED TO AT LEAST ONE HOLDING DOWN BOLT.

5 COLUMN REINFORCEMENT SHALL BE BONDED BY WELDING A CORNER BAR AT NOT LESS THAN TWO POINTS AT EACH LAP IN THE BAR ALONG ITS ENTIRE LENGTH.

INFORMATION REFLECTED ON THIS DRAWING REPRESENTS STRUCTURAL DESIGN DEVELOPED FOR D&C TENDER ADVICE ONLY, AND SHOULD NOT BE REGARDED AS COMPLETE. THE D&C CONTRACTOR SHOULD REFER TO ALL ASSOCIATED ARCHITECTURAL AND OTHER DISCIPLINE DRAWINGS, PROJECT BRIEFS AND CLIENT REQUIREMENTS AND MAKE ADEQUATE ALLOWANCES FOR ALL NECESSARY STRUCTURAL WORKS TO MEET THESE REQUIREMENTS, EQUIPMENT SCHEDULES AND COMPLIANCE WITH THE NCC & APPROPRIATE AUSTRALIAN STANDARDS

REV	DATE	BY	DESCRIPTION	CHK	APP
A	12.02.2026	MSB	ISSUED FOR D&C TENDER	BM	DG
P1	30.01.2026	PJH	DRAFT 60% DD ISSUE FOR REVIEW	BM	DG

DRAWING STATUS: DESIGN DEVELOPMENT

wsp

http://www.wsp.com

CLIENT: CQUniversity AUSTRALIA

ARCHITECT: THOMSON ADSETT + PEDDLE THORP

PROJECT: CQU ROCKHAMPTON TAFE CONSOLIDATION - STAGE 2

TITLE: BuildingName GENERAL NOTES - SHEET 1

SCALE @ A1:	CHECKED:	APPROVED:
N/A	BM	DG
PROJECT NUMBER:	DRAWN:	DATE:
PS229518	PJH	14.01.2026

DRAWING No: 00-ST-DR-A00-010-00-01 REV: A

© WSP Australia Pty Ltd

DRAWING CREATED IN REVIT.