


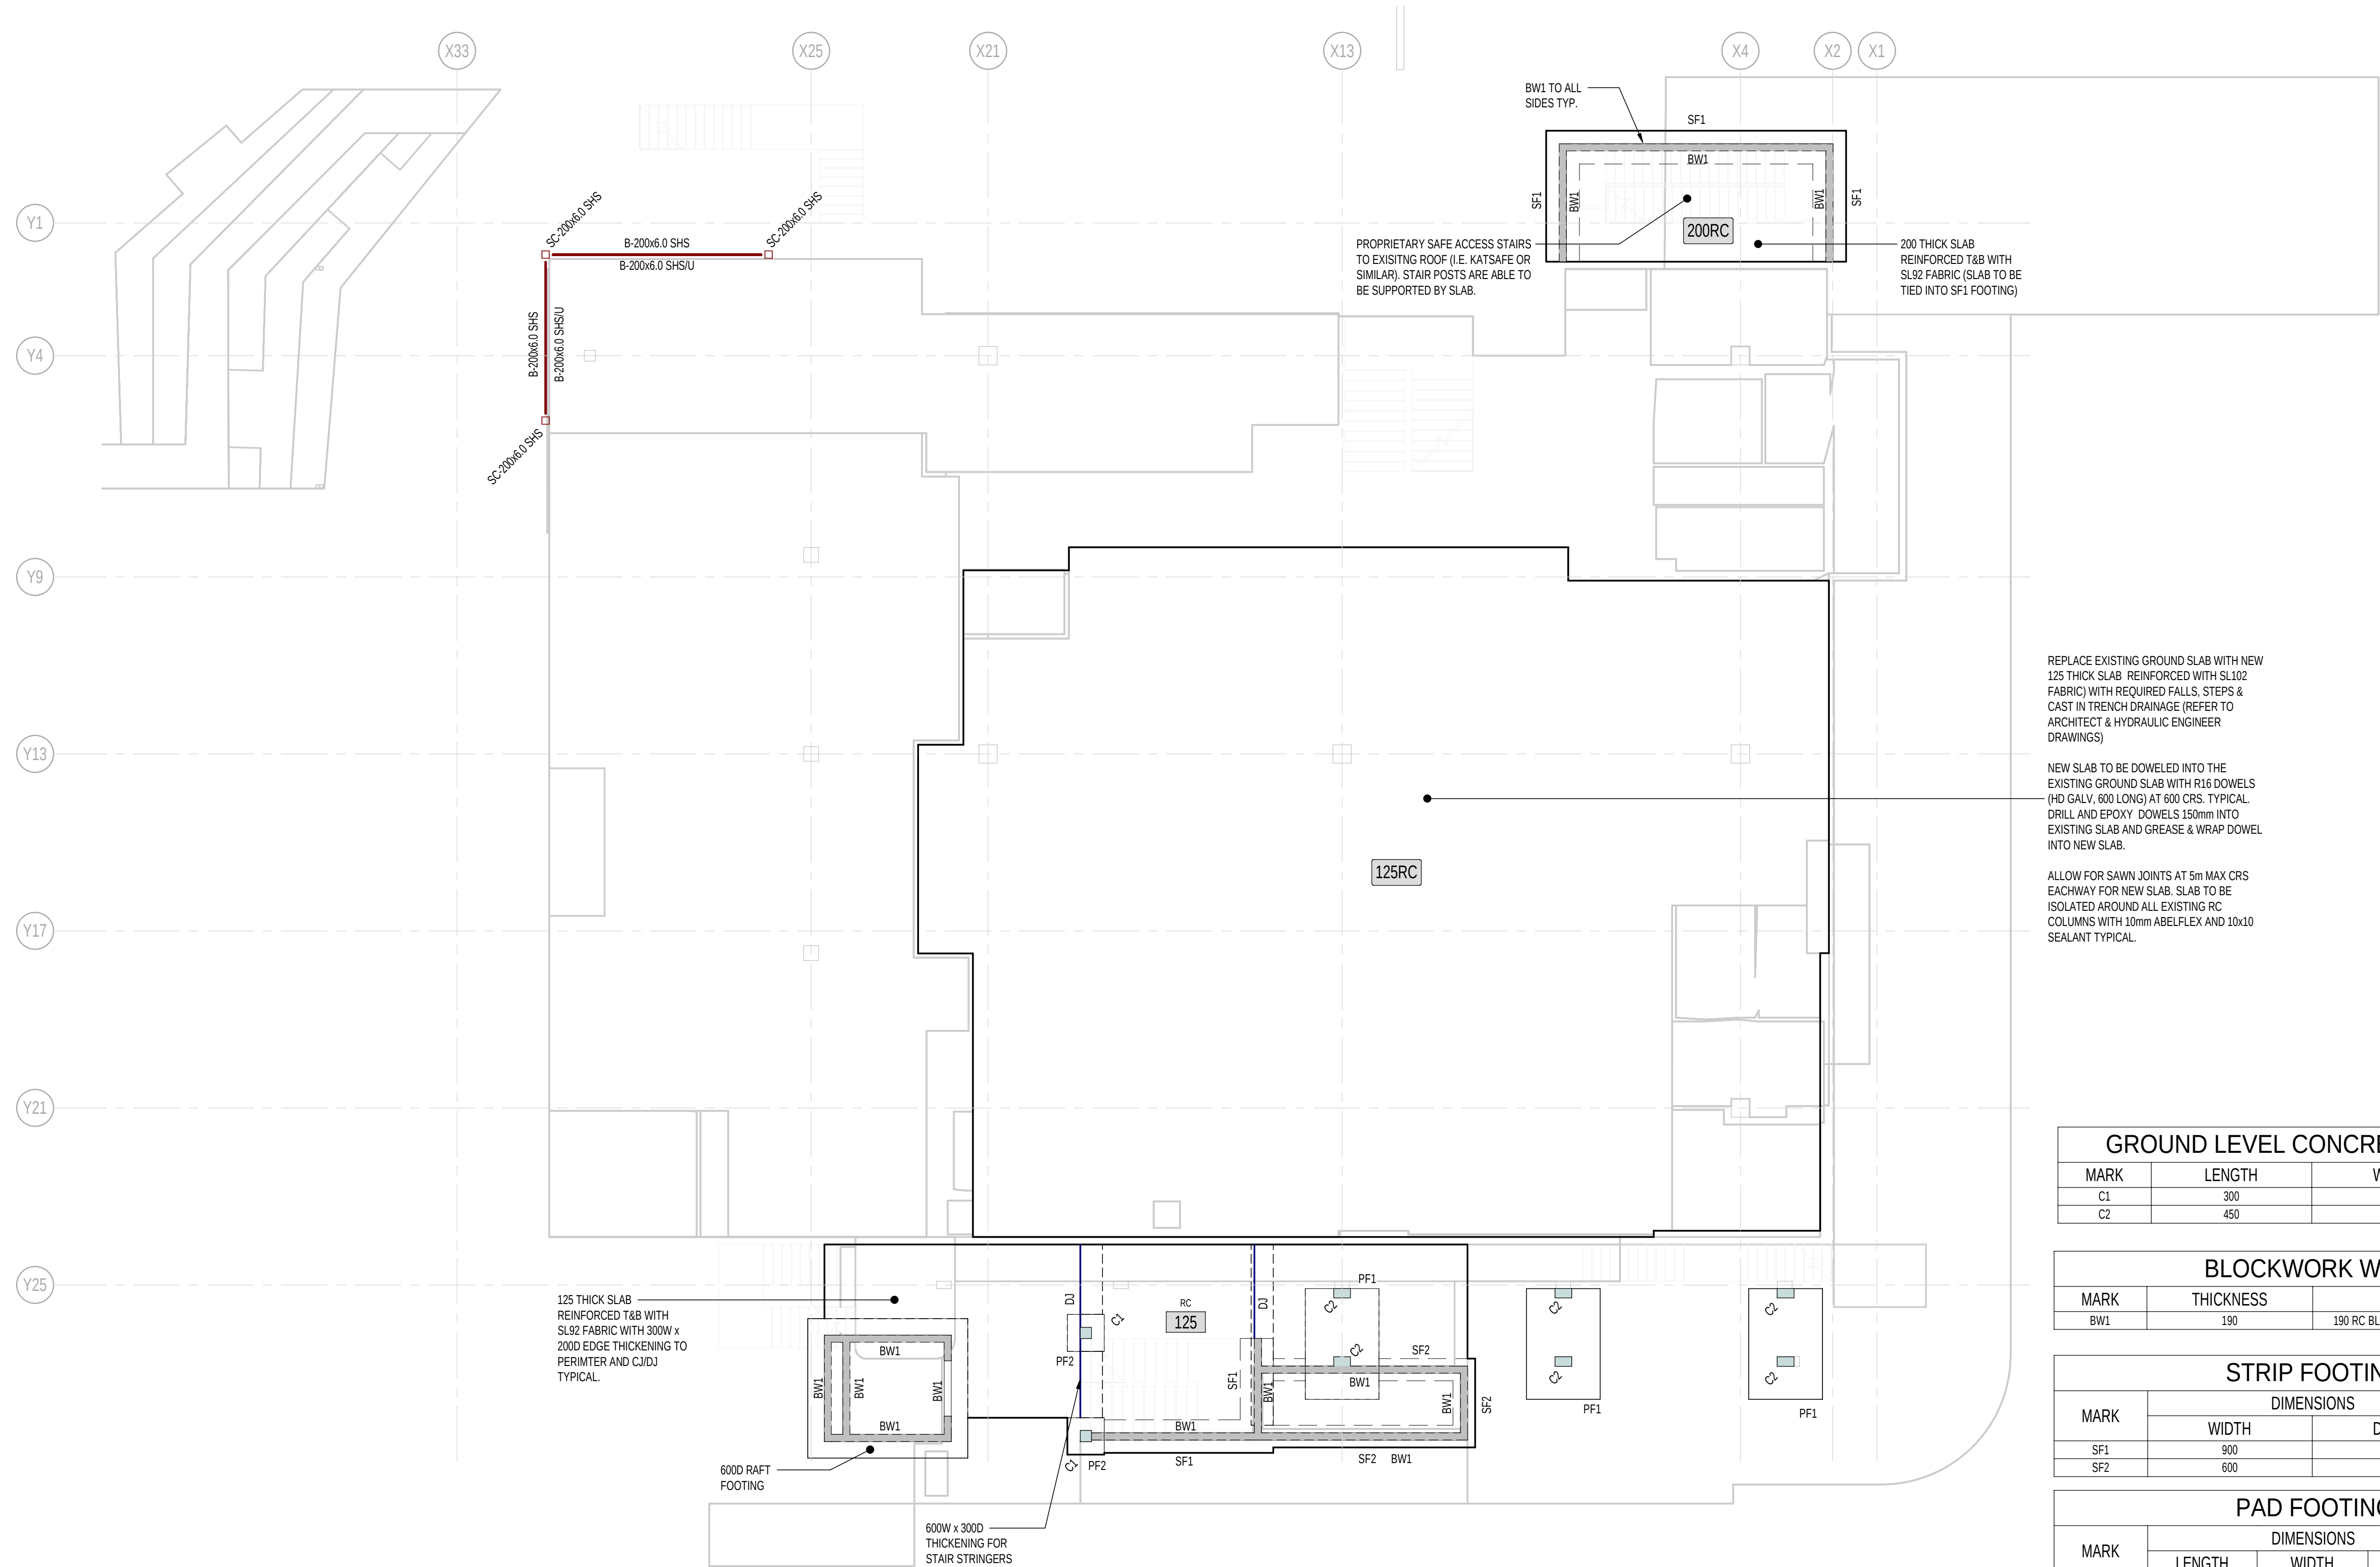

GROUND LEVEL CONCRETE COLUMN SCHEDULE			
MARK	LENGTH	WIDTH	REMARKS
C1	300	300	RC COLUMN (ALLOW180kg/m³)
C2	450	250	RC COLUMN (ALLOW180kg/m³)

BLOCKWORK WALL SCHEDULE		
MARK	THICKNESS	COMMENTS
BW1	190	190 RC BLOCKWORK REINFORCED WITH N16-400 CRS. EACHWAY CENTRAL

STRIP FOOTING SCHEDULE			
MARK	DIMENSIONS		COMMENTS
	WIDTH	DEPTH	
SF1	900	300	STRIP FOOTING (ALLOW 70kg/m³)
SF2	600	300	STRIP FOOTING (ALLOW 70kg/m³)

PAD FOOTING SCHEDULE				
MARK	DIMENSIONS			COMMENTS
	LENGTH	WIDTH	DEPTH	
PF1	3000	2000	600	PAD FOOTING (ALLOW 100kg/m³)
PF2	1000	1000	600	PAD FOOTING (ALLOW 100kg/m³)

INFORMATION REFLECTED ON THIS DRAWING REPRESENTS STRUCTURAL DESIGN DEVELOPED FOR D&C TENDER ADVICE ONLY, AND SHOULD NOT BE REGARDED AS COMPLETE. THE D&C CONTRACTOR SHOULD REFER TO ALL ASSOCIATED ARCHITECTURAL AND OTHER DISCIPLINE DRAWINGS, PROJECT BRIEFS AND CLIENT REQUIREMENTS AND MAKE ADEQUATE ALLOWANCES FOR ALL NECESSARY STRUCTURAL WORKS TO MEET THESE REQUIREMENTS, EQUIPMENT SCHEDULES AND COMPLIANCE WITH THE NCC & APPROPRIATE AUSTRALIAN STANDARDS

DRAWING STATUS: DESIGN DEVELOPMENT					
A	12.02.2026	MSB	ISSUED FOR D&C TENDER	BM	DG
P1	30.01.2026	MSB	DRAFT 60% DD ISSUE FOR REVIEW	BM	DG
REV	DATE	BY	DESCRIPTION	CHK	APP



CLIENT:	CQUniversity AUSTRALIA
ARCHITECT:	PEDDLE THORP

PROJECT:	CQU ROCKHAMPTON TAFE CONSOLIDATION - STAGE 2
TITLE:	BUILDING 36 LEVEL G - GENERAL ARRANGEMENT PLAN

SCALE @ A1:	1:100	CHECKED:	BM	APPROVED:	DG
PROJECT NUMBER:	PS229518	DRAWN:	MSB	DATE:	01.2026
DRAWING No:					REV:
36-ST-DR-GDL-510-00-00					A
© WSP Australia Pty Ltd					