



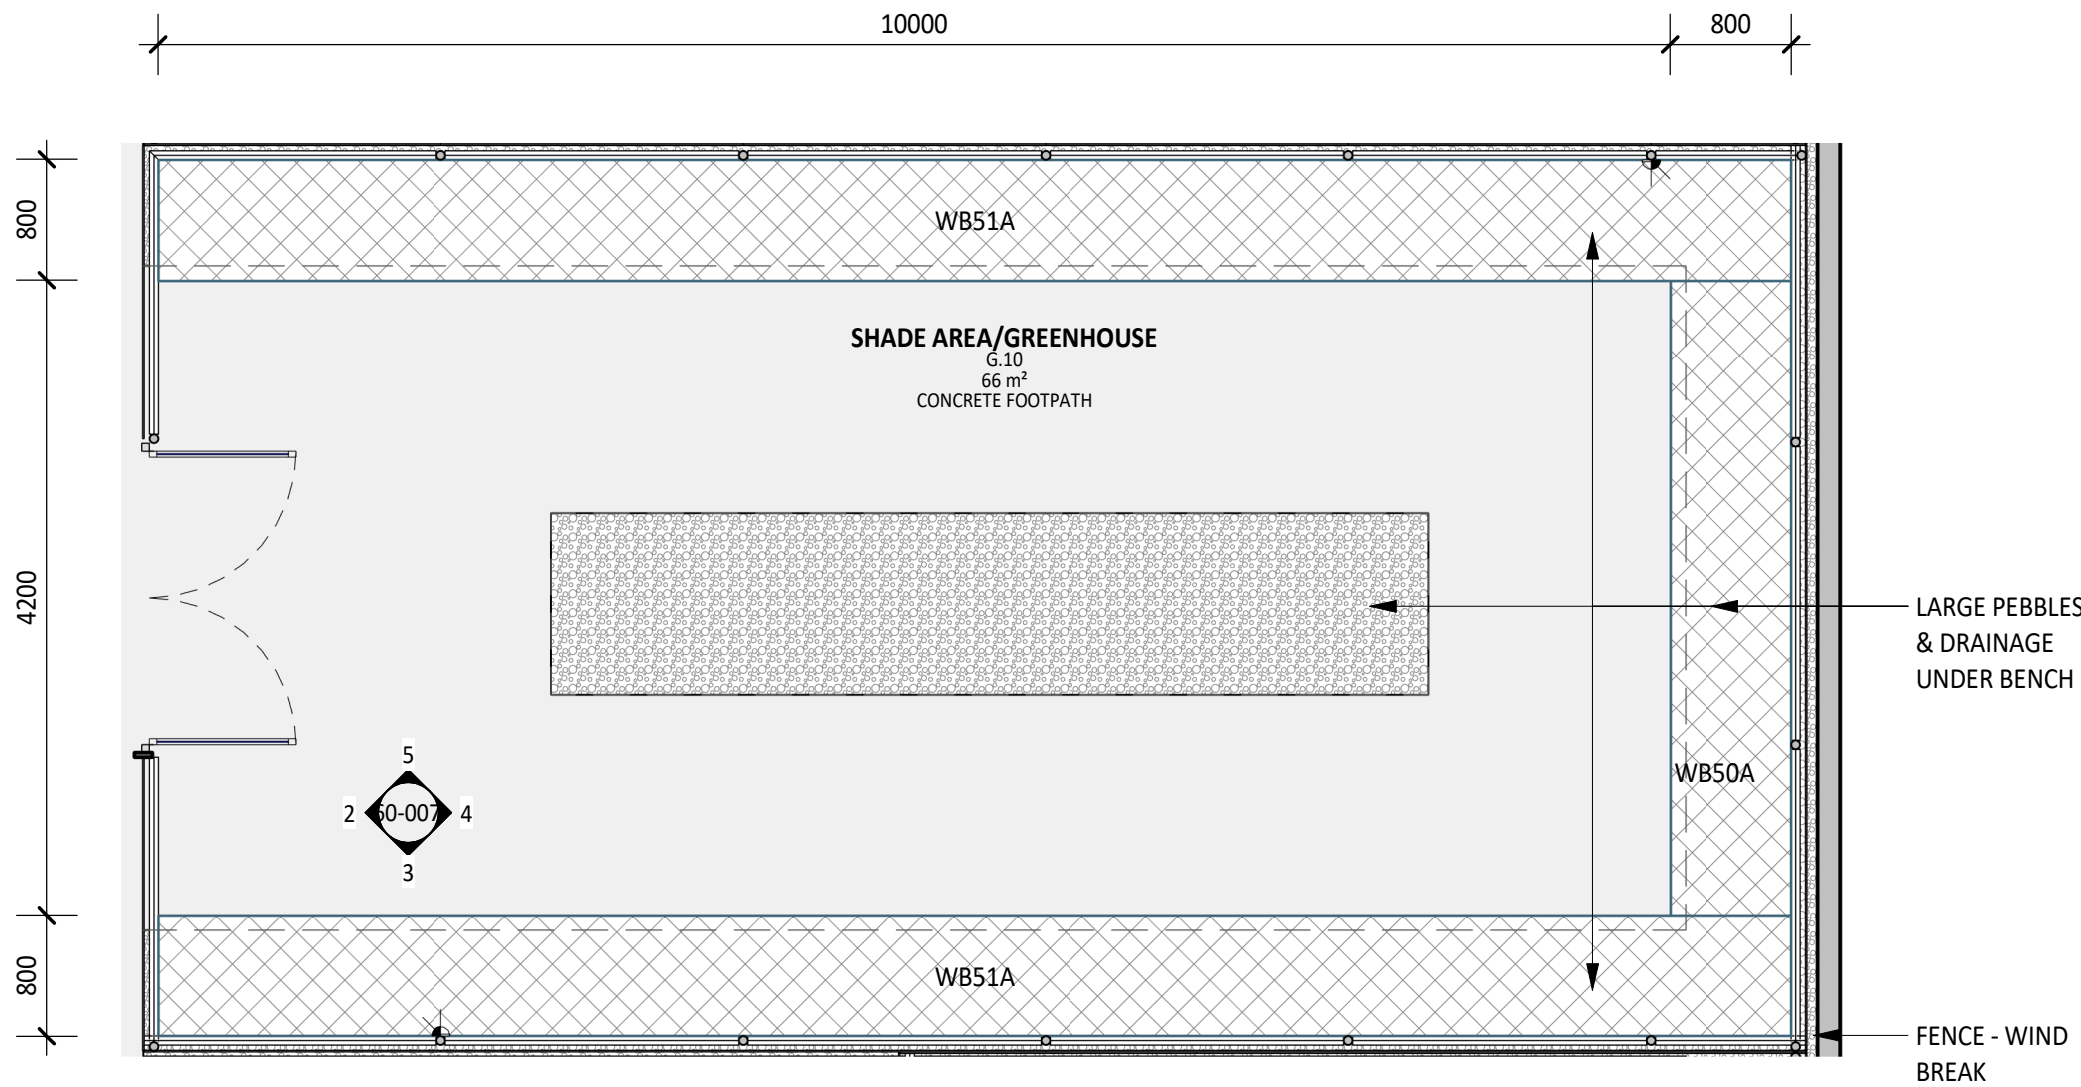


40-LEGEND FFE - SHADE AREA/GREENHOUSE G.10				
Code	Description	Group	Count	
WB50A	Horticulture Metal Mesh Bench - 4200(W) x 800(D) x 900(H)	1	1	
WB51A	Horticulture Metal Mesh Bench - 10000(W) x 800(D) x 900(H)	1	2	


1 PLAN DETAIL
1 : 50

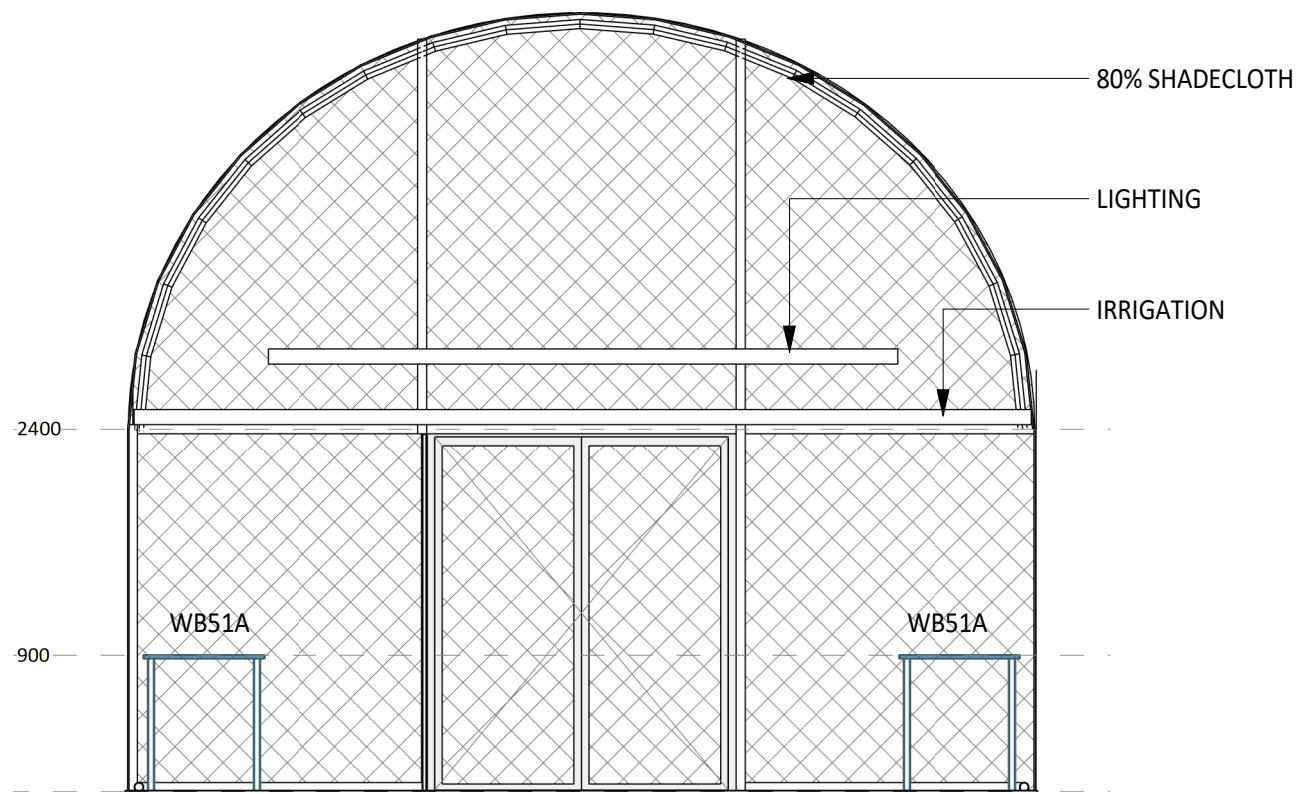

2 ELEVATION DETAIL
60-007 1 : 50

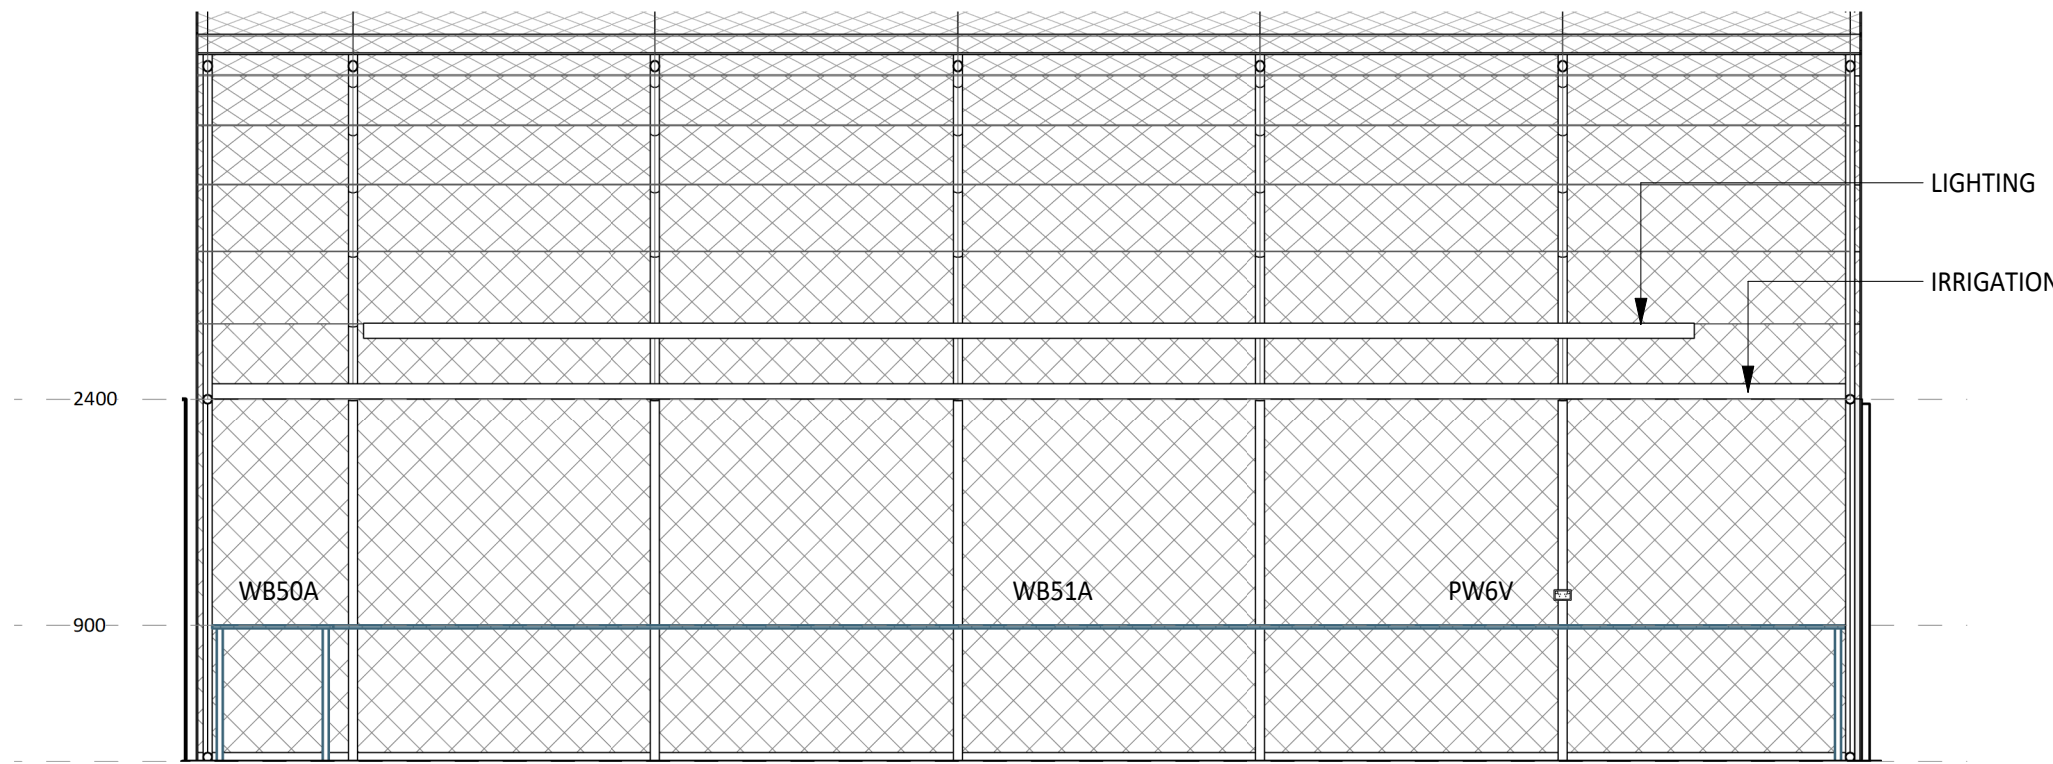

3 ELEVATION DETAIL
60-007 1 : 50

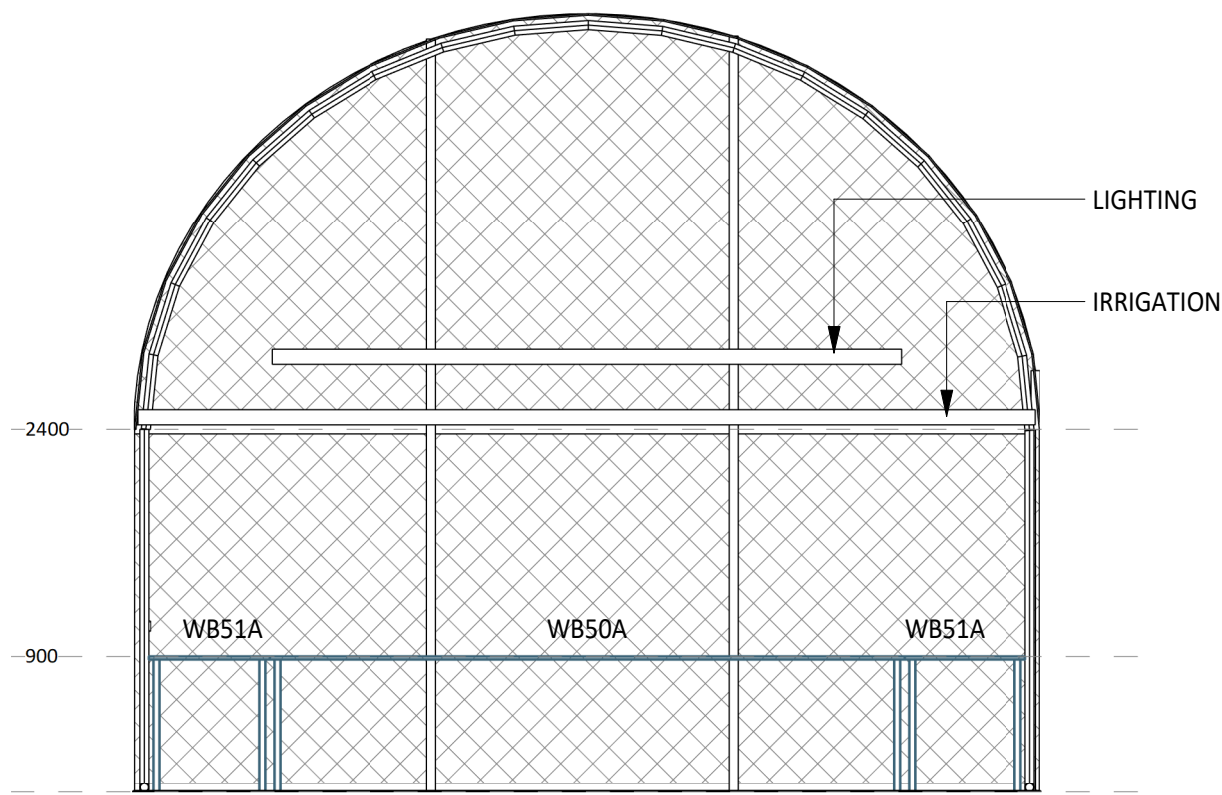

4 ELEVATION DETAIL
60-007 1 : 50



5 ELEVATION DETAIL
60-007 1 : 50

ROOM LAYOUT SHEET NOTES

- ALL ARCHITECTURAL DRAWINGS TO BE READ IN CONJUNCTION WITH OTHER DISCIPLINES.
- REFER TO FF&E, SANITARYWARE SCHEDULES FOR ALL FURNITURE, FIXTURES, AND EQUIPMENT.
- REFER TO ENGINEER'S DRAWINGS FOR DETAILS ON FIRE EXTINGUISHERS AND FIRE BLANKETS
- REFER TO ELECTRICAL DOCUMENTATION FOR OUTLET DETAILS (ie. POWER, DATA, COMMS etc.)
- REFER TO AUDIO VISUAL DOCUMENTATION (VideoPro) FOR AV REQUIREMENTS AND DETAILS.
- AV SUPPLIER TO CONFIRM EXACT POSITIONS OF EQUIPMENT ON SITE
- ALL FF&E ITEMS ARE TO BE READ IN CONJUNCTION WITH FF&E SCHEDULES AND CQU DESIGN MANUAL.
- ALL FF&E AND TRANSFER ITEMS TO BE CONFIRMED BY THE CLIENT.
- PROVIDE ALLOWANCE AND ADD SUPPORT TO WALLS, WHERE FITTINGS ARE WALL MOUNTED. THIS INCLUDES BUT NOT LIMITED TO HANDBASINS, HANDRAILS, SCREENS, PROJECTORS, etc.
- SPECIALISED EQUIPMENT ARE SUPPLIED BY CLIENT AND INSTALLED BY THE BUILDER-CONTRACTOR.
- FF&E COUNT IS FOR INFORMATION ONLY. THE TOTAL NUMBER OF FF&E ITEMS ARE TO BE CONFIRMED WITH CLIENT AND ARCHITECTS BEFORE PURCHASE OF ITEMS.
- CONFIRM ALL DIMENSIONS ON SITE FOR JOINERY ITEMS.
- REFER TO EQUIPMENT AUDIT SPREADSHEET FOR DETAILS OF TRANSFER EQUIPMENT
- CONTRACTOR RESPONSIBLE FOR ALL TRANSFER INCLUDING DISCONNECTION, RECONNECTION, AND INSTALLATION OF TRANSFER EQUIPMENT
- POWER AND DATA POINTS SHOWN ON THE ROOM LAYOUT SHEETS WERE SHOWN AND DISCUSSED DURING USER GROUP BRIEFING. THESE RELATE TO PARTICULAR EQUIPMENT THAT WAS DISCUSSED AS REQUIRING POWER AND DATA. THESE REFLECT STAKEHOLDER EXPECTATIONS FOR SPECIFIC POWER AND DATA POINTS AND HAVE REMAINED IN THE DOCUMENTATION AS A USEFUL REFERENCE FOR THE CONTRACTOR. THESE ARE NOT A COMPLETE QUANTITY AND SPECIFICATION OF POWER AND DATA. THE CONTRACTOR IS TO REFER TO ELECTRICAL ENGINEER'S DOCUMENTATION FOR ALLOWANCE. REFER TO ELECTRICAL DOCUMENTATION FOR AMPS AND 3 PHASE POWER REQUIREMENTS. REFER TO AUDIO VISUAL (VIDEOPRO) DOCUMENTATION FOR ADDITIONAL POWER AND DATA REQUIREMENTS
- ALLOW FOR STRUCTURAL PLY BACKING BEHIND PLASTERBOARD FOR FULL EXTENT OF WALLS WITH MOUNTED AUDIO VISUAL EQUIPMENT. REFER TO AUDIO VISUAL (VIDEOPRO) DOCUMENTATION FOR LOCATIONS OF WALL MOUNTED EQUIPMENT.
- IRRIGATION DESIGN & INSTALLATION. CONTRACTOR IS RESPONSIBLE FOR THE DETAILED DESIGN OF IRRIGATION TO PROPAGATION, SHADE AREA / GREENHOUSE, GREENHOUSE, AND OUTDOOR PLANTING AREAS TO SUIT STAKEHOLDER REQUIREMENTS. EACH AREA REQUIRES SPECIALISED PERFORMANCE REQUIREMENTS TO SUIT THE TYPE OF FUNCTION OF THE SHADE HOUSE.

FF&E LEGEND

- GROUP 1 ITEMS
(PROVIDED & FITTED UNDER CONTRACT)
 - GROUP 2 ITEMS
(PROVIDED BY CLIENT & FITTED UNDER CONTRACT)
 - GROUP 3 ITEMS
(PROVIDED BY CLIENT)
- PLANS TO BE PRINTED IN COLOUR

for



A	12/02/26	ISSUED FOR TENDER	BS
1	30/01/26	DRAFT 60% ISSUE	BS

rev	date	details	init.
-----	------	---------	-------

drawn	date
PT	30/01/26
checked	date
BS	30/01/26
verified	date
BS	30/01/26

scale

RLS - HORTICULTURE - SHADE AREA/GREENHOUSE

scale project no.
1 : 50 @ A1 260018

revision

A

sheet no.

CQU-ROK-076-G-ARC-60-007

original sheet size - A1 (594mm x 841mm)

ISSUED FOR TENDER